

**TECHNICAL DATA** 

# Fluke i400s AC Current Clamp



## **Key features**

- Companion to your scope or power quality meter to measure up to 400 A AC
- Only current clamp available with a CAT IV 600 V / CAT III 1000 V safety rating
- Specially designed to offer maximum utility in a compact shape
- Take accurate current readings without breaking the circuit
- Soft non-slippery overmold handle
- Optional PM9081/001 BNC/Banana adapter for DMM's
- Two ranges: 40 A and 400 A, 10 and 1 mV/Amp output
- Max. conductor Ø 32 mm

### Product overview: Fluke i400s AC Current Clamp

Fluke current clamps extend the current ranges of digital multimeters, power quality analyzers, and portable oscilloscopes and are available for both AC and AC/DC environments. The Fluke i400s is specially designed to offer maximum utility in a compact shape and is the only current clamp available with a CAT IV 600 V / CAT III 1000 V safety rating.

### Specifications: Fluke i400s AC Current Clamp


| Specifications        |             |               |
|-----------------------|-------------|---------------|
| Nominal current range | 40 A Range  | 0.5 A to 40 A |
|                       | 400 A Range | 5 A to 400 A  |



| Basic accuracy                  | 40 A Range                     | 2% + 0.015 A (45-400 Hz) |  |
|---------------------------------|--------------------------------|--------------------------|--|
|                                 | 400 A Range                    | 2% + 0.04 A (45-400 Hz)  |  |
|                                 | 40 A Range                     |                          |  |
| Phase shift                     | 0.5 to 1 A                     | Unspecified              |  |
|                                 | 1 A to 5 A                     | 4°                       |  |
|                                 | 5 A to 10 A                    | 3°                       |  |
|                                 | 10 A to 20 A                   | 3°                       |  |
|                                 | 20 A to 40 A                   | 2°                       |  |
|                                 | 40 A to 400 A                  | NA                       |  |
|                                 | 400 A Range                    |                          |  |
|                                 | 0.5 to 1 A                     | NA                       |  |
|                                 | 1 A to 5 A                     | NA                       |  |
|                                 | 5 A to 10 A                    | Unspecified              |  |
|                                 | 10 A to 20 A                   | 2°                       |  |
|                                 | 20 A to 40 A                   | 2°                       |  |
|                                 | 40 A to 400 A                  | 1.5°                     |  |
| Typical bandwidth               | 40 A Range                     | 5 Hz - 10 kHz            |  |
|                                 | 400 A Range                    | 5 Hz - 10 kHz            |  |
| Output level(s)                 | 40 A Range                     | 10 mV/A                  |  |
|                                 | 400 A Range                    | 1 mV/A                   |  |
| Crest factor                    | 40 A Range                     | ≤ 3                      |  |
|                                 | 400 A Range                    | ≤ 3 to 300 A             |  |
|                                 |                                | ≤ 2.5 to 400 A           |  |
| Safety Specifications           |                                |                          |  |
| Safety                          | CAT IV, 600 V, CAT III, 1000 V |                          |  |
| Maximum non-destructive current | 1000 V AC                      |                          |  |
| Mechanical and General S        | pecifications                  |                          |  |
| Warranty                        | 1 year                         |                          |  |
| Maximum conductor size          | 32 mm (1.25 inches)            |                          |  |
| Output cable length             | 2.5 m (8.2 ft)                 |                          |  |
| BNC adapter                     | Yes                            |                          |  |
| Dimensions                      | 150 x 70 x 30 mm               |                          |  |
| Weight                          | 114 g                          |                          |  |



# **Ordering information**

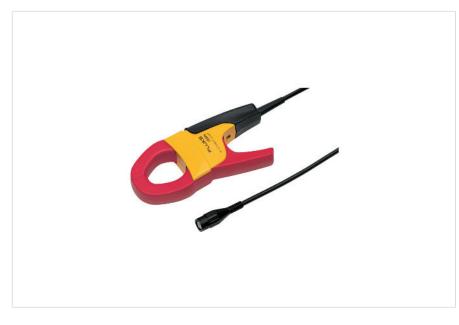

### Fluke i400s



#### Fluke. Keeping your world up and running.®

Fluke Corporation PO Box 9090, Everett, WA 98206 U.S.A.

#### For more information call:

In the U.S.A. (800) 443-5853 In Canada (800) 36-FLUKE From other countries +1 (425) 446-5500 www.fluke.com ©2023 Fluke Corporation. Specifications subject to change without notice. 10/2023

Modification of this document is not permitted without written permission from Fluke Corporation.