

Technical Information

Tankvision Gauge Link NXA20

Inventory Management System with completely integrated software for operation via standard web browser



Application

Tankvision is a dedicated tank inventory system which is operated by a standard web browser and does not require proprietary software or licensing costs. Tankvision is based on a distributed architecture on a Local Area Network (LAN). Due to its modular structure it can be adjusted to any application. It is ideally suited for small tank farms with only a couple of tanks, but also for large refineries with hundreds of tanks.

Tankvision consists of the following components:

- **Tankvision Tank Scanner NXA820**
scans parameters from tank gauges and performs tank calculations (option)
- **Tankvision Data Concentrator NXA821**
summarizes data from various Tank Scanners NXA820
- **Tankvision Host Link NXA822**
provides data to host systems (such as PLC or DCS) via Modbus
- **Tankvision Gauge Link NXA20**
connects the Tank Scanner with tank gauges/sensors with Enraf BPM or Emerson TRL/2 interfaces

Your benefits

- License-free
- Approved for custody transfer applications according to NMI, PTB and others
- Global system engineering and service support
- A robust industrial operating system with embedded software ensures high stability and availability.
- Modular design; easily adjustable to any application; can be upgraded as required
- Configuration, commissioning and operation via web browser; no proprietary software required
- Access for up to 10 users per Tankvision component from any connected PC
- Common hardware platform for all components; no hard disc or fans to wear out
- Volume calculations and correction included according to international standards (API/ASTM/IP tables) in Tank Scanner NXA820 (optional)
- Predefined or customized operator screens for typical operation of a tank farm (optional)
- Includes OPC Data Access server (3.0) for Windows PC

Table of Contents

Applications	3	Description of Instrument Functions	10
Inventory control	3	Operating Instructions	10
Application areas	3		
Function and system design	4	Registered trademarks	10
System design	4	Modbus®	10
System configuration	4	Microsoft®, Windows® and Internet Explorer®	10
Features	5	Java®	10
Security	5	Mozilla® Firefox®	10
		Enraf, Honeywell, Rosemount, Emerson, Saab, L&J, VAREC, GPE	11
Typical system configuration	6	Others	11
Wiring example for NXA820/821/822/20	6		
Function of the components	6		
Gauge Link NXA20	6		
Inputs and Outputs	7		
Power supply NXA	7		
Galvanic isolation	7		
RS-232 connections	7		
Fieldbus protocols	7		
Environment	7		
Mounting location	7		
Ambient temperature	7		
Storage temperature	7		
Relative humidity	7		
Ingress protection	7		
Electromagnetic compatibility (EMC)	7		
Installation	7		
Mechanical construction	8		
Dimensions	8		
Materials	8		
Installation considerations	8		
System requirements of user PC	8		
Shielding and Grounding	8		
Ordering information	9		
Ordering information	9		
Human interface	10		
Operating concept	10		
Languages	10		
Certificates and approvals	10		
Metrological approvals	10		
Supplementary documentation	10		
Operating Instructions	10		
Operating Instructions	10		
Operating Instructions	10		

Applications

Inventory control

By using Tankvision to monitor the tank level and stored volume of valuable liquids remotely, owners or operators of tank farms or terminals for petroleum products and chemicals (liquids) can visualize the volume of the stored medium in real time. The data can be used to plan the inventory and distribution. The data can also be used to manage tank farm operations like pumping or transferring products.

Tankvision has its unique concept using network technology. Without using proprietary software, the users can visualize and manage their valuable liquids stored in the tanks by a web browser.

Tankvision is a flexible and cost effective solution due to its scalable architecture. The application coverage goes from small depots with only a few tanks up to refineries.

Choosing the "Interface only" option in Tank Scanner it becomes a fit-for-purpose interface unit to the tank gauges for Tankvision Professional.

With the Gauge Link the Tank Scanner becomes a fit-for-purpose interface unit to the tank gauges with Enraf BPM and Emerson TRL/2 Protocols.

Application areas

- tank farms in refineries
- ship loading terminals
- marketing and distribution terminals
- pipeline terminals
- logistic terminals for tanks storing products like crude oils, refined white and black products, chemicals, LPGs, fuels, biofuels, alcohols

Function and system design

System design

Tank management visualization without proprietary software

Tankvision is the first tank management visualization system providing its functionality without the need to have proprietary software installed and maintained on a PC. The main functionality is realized by embedded web pages in the Tankvision components. Tankvision uses an industrial proven operating system and provides high availability. Tankvision is not based on a PC platform and runs independent of connected PCs. This eliminates the need to maintain a specialized PC with a Windows operating system and necessary updates and hot fixes. Tankvision web pages can be accessed from a standard PC with a web browser. Multiple users with different roles can simultaneously log in to each Tankvision component. Additional users can be added as required. There are no multi-user licence fees. Please check with Endress+Hauser for recommendations on PC, operating system and web browser.

Tank management visualization for tank gauges/sensors with Emerson TRL/2 or Enraf BPM field protocols

Tankvision Tank Scanner is designed to interface with Modbus, Sakura V1 or Whessoe 550 field protocols. This functionality is expanded by the Gauge Link for the Enraf BPM and the Emerson TRL/2 field protocols.

Distributed architecture and scalability

Tankvision is based on a distributed architecture on a Local Area Network (LAN). Coordinated components perform all inventory management tasks. The modular design makes it easy to enlarge the system whenever required and to add further tank areas. Thus, Tankvision is fully scalable and is ideally suited for applications of any size - from small tank farms to large refineries.

Common hardware platform

The Tankvision components have dedicated tasks in a system, but have a common architecture, based on a 32 Bit processor. The embedded tank management software uses a multi-threaded real time operating system (RTOS), specifically designed for industrial applications. The hardware is designed without wear-out components like hard discs or fans. This guarantees high reliability.

System configuration

Configuration of the Tank Scanner

Each Tankvision component has its own data base and a web server. The components are connected and exchange data with time stamp and status information. Data is optionally encrypted and secured by a CRC checksum.

The Tankvision components are configured with static IP addresses, which are reserved on a DHCP network.

The configuration pages are embedded in the Tankvision components and allow configuration of Tankvision via a connected web browser without configuration software. No Internet access is necessary, as all pages are loaded from the Tankvision system itself.

Configuration of the connected Gauge Link to the Tank Scanner

Bus termination and biasing are controlled by software selectable settings in the Tankvision Gauge Link. By default, these are enabled for point-to-point links or the devices in a multidrop network that are at the outer "ends" of the cable. If the Tankvision Gauge Link is part of a multi-drop network and is not the "end" device on the cable, the termination and biasing may be disabled.


Configuration of the connected tank gauges/sensors to the Gauge Link

The diagnostic / service port generally remains unconnected during normal operation of the Tankvision Gauge Link. The port has a 9 way "D" type socket connector. A suitable cable with mating plug will be required for local connection of a service laptop PC or similar. A "standard" serial port, a 9-way fully wired plug – socket cable will be required. The cable should be wired pin-to-pin, i.e. 1-1, 2-2, 3-3, ... 9-9. Proprietary cables will generally have all pins wired, though only pins 2, 3, 4, 5 and 7 are actually used. Cable length should not exceed 2 metres (6.6 ft).

Features	■ Interfacing Honeywell Enraf BPM or Emerson TRL/2 field protocols. ■ Asset management with the Honeywell Enraf or Emerson Saab gauge tools.
Security	IT security We only provide a warranty if the device is installed and used as described in the Operating Instructions. The device is equipped with security mechanisms to protect it against any inadvertent changes to the device settings. IT security measures in line with operators' security standards and designed to provide additional protection for the device and device data transfer must be implemented by the operators themselves.

Typical system configuration

Wiring example for NXA820/
821/822/20

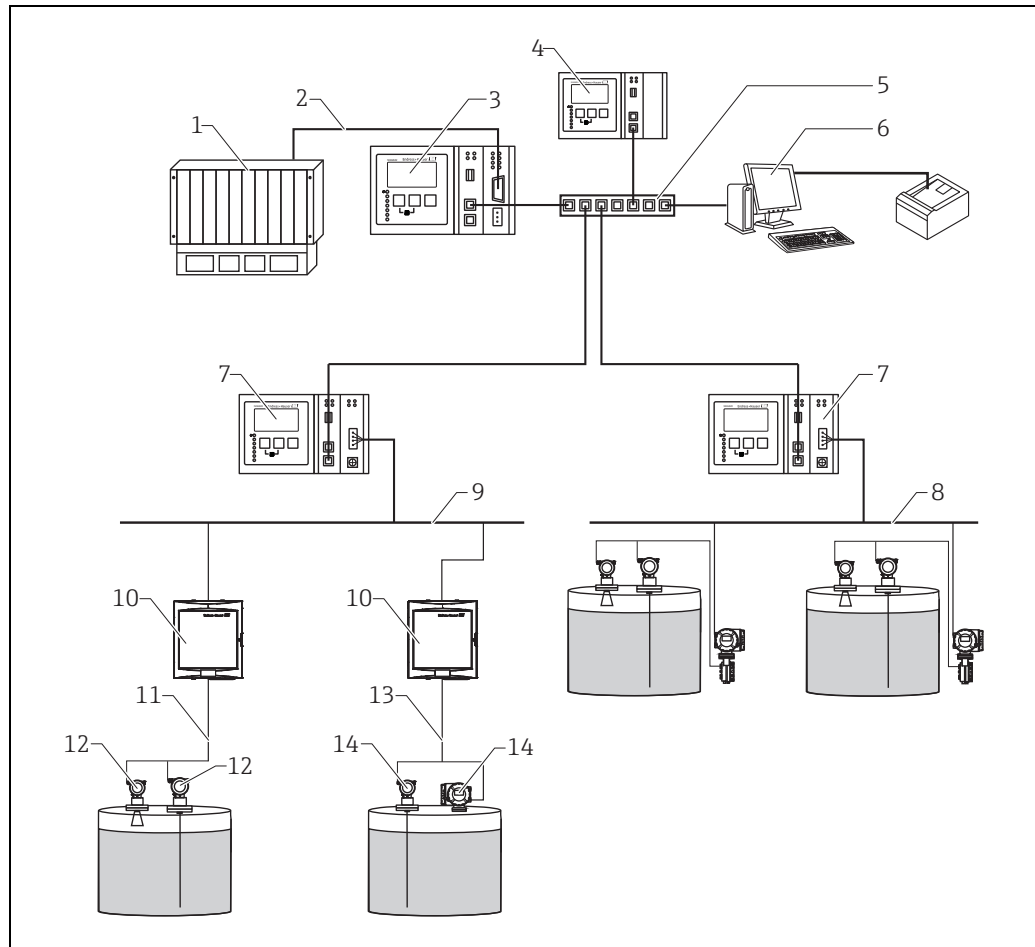

NXA20_Wiring_example

- 1 DCS/PLC (Distributed control system/Programmable logic controlled)
- 2 Modbus
- 3 Host Link NXA822
- 4 Data Concentrator NXA821
- 5 Switch
- 6 Operator with Browser/SupplyCare Enterprise (Server)
- 7 Tank Scanner NXA820
- 8 Fieldbus protocol
- 9 Modbus protocol
- 10 Gauge Link NXA20
- 11 ENRAF BPM protocol
- 12 Tank gauges/sensors with Enraf BPM interface
- 13 Emerson TRL/2 protocol
- 14 Tank gauges/sensors with Emerson TRL/2 interface

Function of the components

Gauge Link NXA20

- The Gauge Link NXA20 connects multiple tank gauges from up to 32 tanks (max. 15 when used in combination with NXA820) via one field-loop. The Gauge Link NXA20 supports different field protocols (Enraf BPM, Emerson TRL/2).
- The measured values are transmitted by the Modbus network to the Tank Scanner NXA820 which will provide visualization on HTML pages.
- The Gauge Link NXA20 has to be used in combination with the Tank Scanner NXA820 to provide visualization.

Inputs and Outputs

Power supply NXA

Property	Specification
Supply voltage	90 - 250 VAC (50/60Hz)
Power consumption	max. 23 VA
Current consumption	max. 100 mA at 230 VAC
Fuse	T 400 mA HBC 250V AC, 20 x 5 mm (0.79 x 0.2 in)

Galvanic isolation

The following terminals are galvanically isolated from each other:

- Fieldbus interface (Enraf BPM or Emerson TRL/2 interface)

RS-232 connections

Fieldbus protocols

The Gauge Link NXA20 is available with the following field protocols:

- Enraf BPM, max. 32 gauges (max. 15 when used in combination with NXA820)
- Emerson TRL/2, max. 32 gauges (max. 15 when used in combination with NXA820)

Environment

Mounting location

Cabinet or protective housing

Ambient temperature

−40 to +60 °C (−40 to +140 °F)

Storage temperature

−40 to +85 °C (−40 to +185 °F)

Relative humidity

max. 90 % at +25 °C (non-condensing)

Ingress protection

IP20

Electromagnetic compatibility (EMC)


EMC according to the requirements of the EN 61326-series and the NAMUR-recommendation EMC (NE21). Details can be found in the Declaration of Conformity.

Installation

Tankvision Gauge Link NXA20 is designed to be installed in a cabinet, using a standard 35 mm DIN (top-hat) rail conforming to EN50022 (BS5584) (IEC 60715).

Mechanical construction

Dimensions

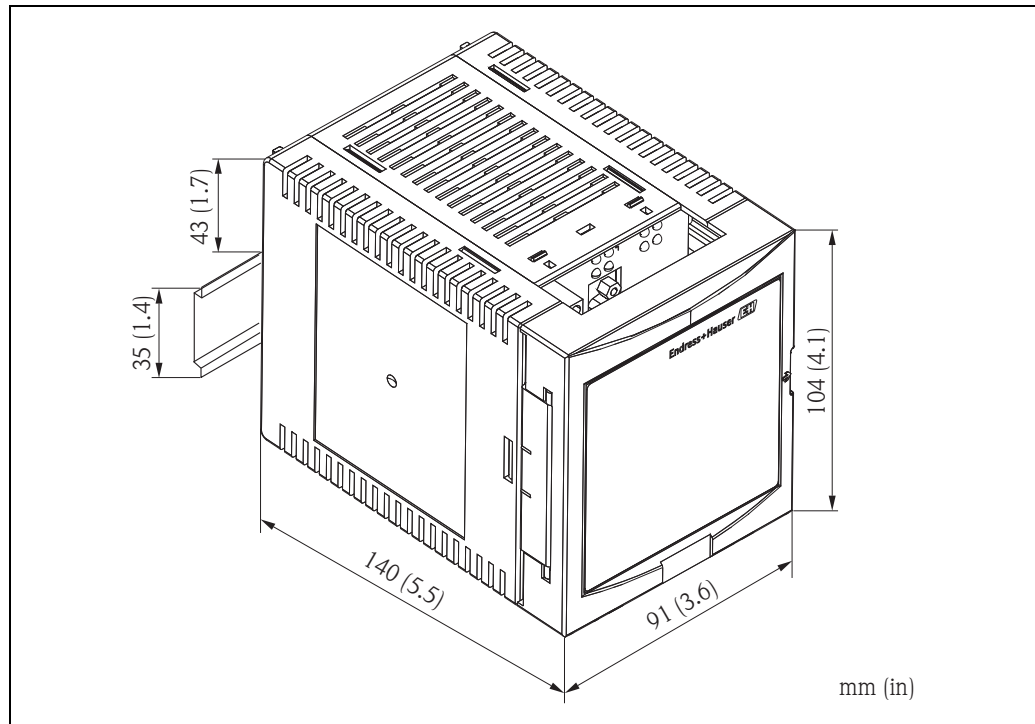

Dimensions in mm (inch)

GaugeLink_Dimensions

Materials

Housing

Polycarbonate
Colour: light grey

Front cover

Polyamide PA6
Colour: grey

Installation considerations

i It is recommended to take the information contained in the Operating Instructions into consideration when designing the system architecture (→ 10).

System requirements of user PC

Check the latest information on hardware and software requirements.
Please contact your local Endress+Hauser Sales Center.

Shielding and Grounding

When planning the shielding and grounding for a fieldbus system, there are three important points to consider:

- Electromagnetic compatibility (EMC)
- Explosion protection
- Safety of the personnel

To ensure the optimum electromagnetic compatibility of systems, it is important that the system components and above all cables, which connect the components, are shielded and that no portion of the system is unshielded. Ideally, the cable shields are connected to the normally metal housings of the connected field devices. Since these are generally connected to the protective earth, the shield of the bus cable is grounded many times. Keep the stripped and twisted lengths of cable shield to the terminals as short as possible.

This approach, which provides the best electromagnetic compatibility and personnel safety, can be used without restriction in systems with good potential equalization.

In the case of systems without potential equalization, a power supply frequency (50/60 Hz) equalizing current can flow between two grounding points which, in unfavourable cases, e.g. when it exceeds the permissible shield current, may destroy the cable.

To suppress the low frequency equalizing currents on systems without potential equalization, it is therefore recommended to connect the cable shield directly to the building ground (or protective earth) at one end only and to use capacitive coupling to connect all other grounding points.

The NXA20 provides two grounding points for the shield, close to the fieldbus interface connector:

- The “)” terminal, which should already be connected directly to ground
- The “S” terminal (13), which provides capacitive connection to the “)” terminal

NOTICE

EMC requirements

The legal EMC requirements are fulfilled **only** when

- ▶ the cable shield is grounded on both sides!

Ordering information

Ordering information

Detailed ordering information is available from the following sources:

- In the Product Configurator on the Endress+Hauser website: www.endress.com → Select country → Instruments → Select device → Product page function: Configure this product
- From your Endress+Hauser Sales Center: www.endress.com/worldwide



Product Configurator - the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

Human interface

Operating concept	Tankvision is operated by a standard web browser (e.g. Microsoft Internet Explorer). The Tankvision components contain predefined operating pages. If required, they can be adjusted by the user.
Languages	The operating pages are available in the following languages: ■ English  Check with Endress+Hauser for the latest information on available languages.

Certificates and approvals

Metrological approvals	In preparation
-------------------------------	----------------

Supplementary documentation

Operating Instructions	BA01335G Operating Instructions for NXA20 Describes installation, electrical connection and first setup.
Operating Instructions	BA01334G Operating Instructions for NXA20 Describes the Modbus Map Protocol.
Operating Instructions	BA00340G Operating Instructions for NXA820, NXA821 and NXA822 Describes installation, electrical connection and first setup.
Description of Instrument Functions	BA00339G Description of Instrument Functions for Tank Scanner NXA820, Data Concentrator NXA821 and Host Link NXA822. Contains a detailed description of all instrument functions.
Operating Instructions	BA01137G Operating Instructions for Tankvision NXA820 OPC Server. Describes installation, configuration and usage.

Registered trademarks

Modbus®	Modbus® is a registered trademark of the MODBUS-IDA, Hopkinton, MA, USA.
Microsoft®, Windows® and Internet Explorer®	Microsoft®, Windows®, Internet Explorer® and the Microsoft logo are registered trademarks of the Microsoft Corporation.
Java®	Java® is a registered trademark of Sun Microsystems, Inc.
Mozilla® Firefox®	Registered trademark of the Mozilla Foundation

Enraf, Honeywell, Rosemount, Emerson, Saab, L&J, VAREC, GPE	Enraf, Honeywell, Rosemount, Emerson, Saab, L&J, VAREC, GPE are registered trademarks and trademarks of these organizations and companies.
Others	All other marks are property of their respective owners.



71310502

www.addresses.endress.com
