Technical Information Deltapilot M FMB50, FMB51, FMB52, FMB53

Hydrostatic level measurement





Application

The device is used for the following measuring tasks:

- Hydrostatic pressure measurement in liquids and paste-like media in all areas of process engineering, process measuring technology, pharmaceuticals and the food industry
- Level, volume or mass measurement in liquids

Your benefits

- Very good reproducibility and long-term stability
- Maximum plant safety provided by one-of-a-kind, condensate-resistant CONTITE measuring cell
- High reference accuracy: ±0.2 %
- optionally ± 0.1 %
- Turn down up to 100:1
- Uniform platform for differential pressure, hydrostatics and pressure (Deltabar M – Deltapilot M – Cerabar M)
- Simple, fast commissioning through a user interface designed for real-world applications
- Used for process pressure monitoring up to SIL 2, certified to IEC 61508 Edition 2.0 and IEC 61511 by TÜV NORD
- Usage in drinking water: KTW, NSF



Table of contents

Document information	4 4 5 5 6
Function and system design	7 10 10 11 12 12 13
Input	14 14 14
OutputOutput signalSignal range 4 to 20 mASignal on alarmLoad - 420 mA HARTLoad for current output in the case of an IO-Link deviceDead time, time constantDynamic behavior, current output (HART electronics)Dynamic behavior, digital output (HART electronics)Dynamic behavior, ROFIBUS PADynamic behavior, FOUNDATION FieldbusIO-LinkDampingFirmware versionGalvanic isolationHART protocol-specific dataIO-Link protocol-specific dataFOUNDATION Fieldbus PAFOUNDATION Fieldbus PA	15 15 15 15 16 16 16 16 17 17 18 18 18 18 18 19 19 20 20
Power supplyTerminal assignmentSupply voltageCurrent consumptionElectrical connectionTerminalsCable entryConnectorCable specificationStart-up currentResidual rippleInfluence of power supplyOvervoltage protection (optional)	 23 24 24 24 24 25 27 27 27 27 27 27 27 27 27

Performance characteristics of metallic process	
membrane	29
Reference operating conditions	29
Influence of the orientation	29
Calibration position	29
Resolution	29
Reference accuracy	29
Thermal change in the zero output and the output span \ldots	30
Total performance	30
Long-term stability	30
Total error	30
Warm-up time	31
Mounting	32
General installation instructions	32
FMB50	32
FMB51/FMB52/FMB53	32
Supplementary installation instructions	33
Wall and pipe mounting, transmitter (optional)	33
"Separate housing" version	34
Oxygen applications	35
PWIS cleaning	35
Applications with hydrogen	35
Special measuring cells for acids, alkalis or sea water (not	
FMB50)	35
Environment	36
Operating temperature range	36
Ambient temperature limits	36
Storage temperature range	36
Climate class	36
Degree of protection	36
Vibration resistance	37
Electromagnetic compatibility	37
Process	38
Process temperature range	38
Lateral load FMB51 (static)	38
Pressure specifications	38
	20
Mechanical construction	39
Device height	39
F31 housing, aluminum	39
F15 housing, stainless steel (hygienic)	40
Diameter of the process membrane	40
Process connections FMB50, FMB51, FMB52 Process connections FMB50, FMB51, FMB52	41 42
Process connections FMB50	42 45
Process connections FMB50 (rod version)	49
Process connections FMB51 (rot version)	51
Dimensions of FMB53 with F31 housing, suspension	~
clamp and mounting bracket	53
Dimensions of FMB53 with F15 housing, suspension	
clamp and mounting bracket	54
Wall and pipe mounting with mounting bracket	55
FMB50: Reduction in installation height	56
FMB51, FMB52: Reduction in installation height	56
Example for a "Separate housing version"	57

Materials not in contact with process	58 61
Operability	64 64 67 67 69
Certificates and approvals CE mark RoHS RCM marking Ex approvals EAC conformity Suitable for hygiene applications Certificate of current Good Manufacturing Practices	71 71 71 71 71 71 71
(cGMP)Certificate of Compliance ASME BPE 2012 (only FMB50)Functional safety SILCRN approvalOverfill protectionOther standards and guidelinesAD2000Pressure Equipment Directive 2014/68/EU (PED)Manufacturer declarationMarine approvalDrinking water approvalClassification of process sealing between electrical	71 71 71 72 72 72 72 72 73 73
systems and (flammable or combustible) process fluids in accordance with ANSI/ ISA 12.27.01	73 73 73 74 74
Ordering information	75 75 75 75 75
Supplementary documentation	78 78 78 78 78 78 78
Accessories	79 79 79 79 79 79 79 80
Registered trademarks	80

Document information

Document function

The document contains all the technical data on the device and provides an overview of the accessories and other products that can be ordered for the device.

Symbols used

Safety symbols

Symbol	Meaning
A DANGER	DANGER! This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in seriousor fatal injury.
WARNING	WARNING! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in seriousor fatal injury.
	CAUTION! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minoror medium injury.
NOTICE	NOTICE! This symbol contains information on procedures and other facts which do not result in personalinjury.

Electrical symbols

Symbol	ymbol Meaning		Meaning
	Protective ground connection A terminal which must be connected to ground prior to establishing any other connections.	4	Ground connection A grounded terminal which, as far as the operator is concerned, is grounded via a grounding system.

Symbols for certain types of information

Symbol	Meaning
	Permitted Procedures, processes or actions that are permitted.
	Preferred Procedures, processes or actions that are preferred.
\mathbf{X}	Forbidden Procedures, processes or actions that are forbidden.
i	Tip Indicates additional information.
	Reference to documentation
	Reference to page
	Reference to graphic
	Visual inspection

Symbols in graphics

Symbol	Meaning
1, 2, 3	Item numbers
1. , 2. , 3	Series of steps

6


Symbol	Meaning
A, B, C,	Views
A-A, B-B, C-C,	Sections

Documentation

See chapter "Additional documentation" \rightarrow 🗎 78


The document types listed are available: In the Download Area of the Endress+Hauser Internet site: www.endress.com \rightarrow Download

Terms and abbreviations

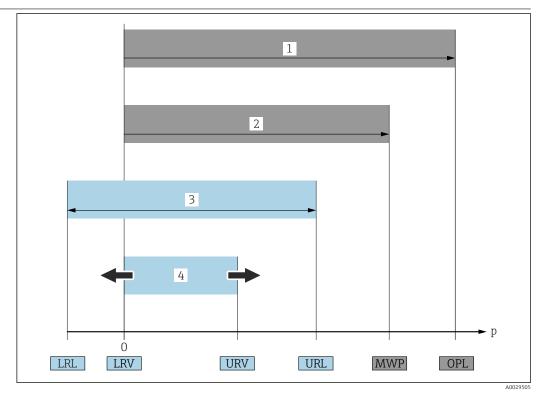


Item	Term/abbreviation	Explanation
1	OPL	OPL: The OPL (over pressure limit = sensor overload limit) for the measuring device depends on the lowest-rated element, with regard to pressure, of the selected components, i.e., the process connection has to be taken into consideration in addition to the measuring cell. Observe pressure-temperature dependency.
2	MWP	MWP: The MWP (maximum working pressure) for the sensors depends on the lowest-rated element, with regard to pressure, of the selected components, i.e., the process connection has to be taken into consideration in addition to the measuring cell. Observe pressure-temperature dependency. The MWP may be applied at the device for an unlimited period of time. The MWP can be found on the nameplate.
3	Maximum sensor measuring range	Span between LRL and URL This sensor measuring range is equivalent to the maximum calibratable/adjustable span.
4	Calibrated/adjusted span	Span between LRV and URV Factory setting: 0 to URL Other calibrated spans can be ordered as customized spans.
р	-	Pressure
-	LRL	Lower range limit
-	URL	Upper range limit
-	LRV	Lower range value
-	URV	Upper range value
-	TD (Turn down)	Turn down Example - see the following section.

Turn down calculation

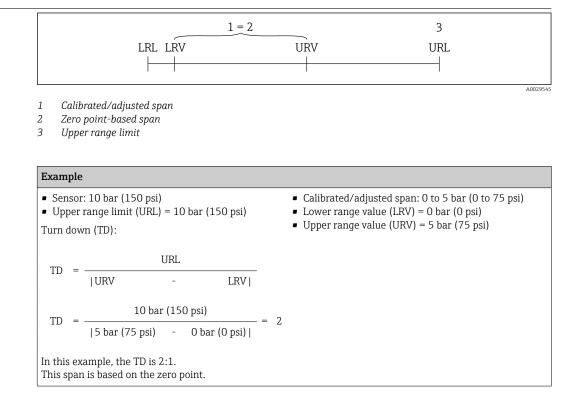

Function and system design

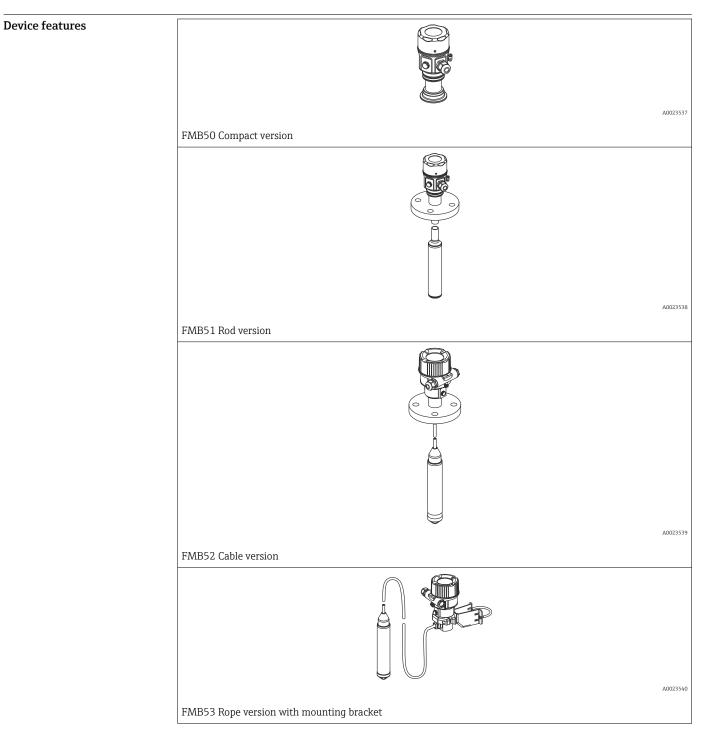

Field of application

- Level measurement
- Pressure measurement

Industries

- FMB50: Food, pharmaceuticals, chemicals, power plants, automotive, etc.
- FMB51: Food, pharmaceuticals, chemicals, power plants, automotive, etc.
- FMB52: Food, pharmaceuticals, chemicals, power plants, automotive, etc.
- FMB53: Environment (freshwater and wastewater)

Process connections

FMB50

- Thread
- Flanges
- Flush hygienic connections

FMB51

- Thread
- Flanges

FMB52

- Thread
- Flanges
- FMB53

Suspension clamp

Measuring ranges

From -0.1 to +0.1 bar (-1.5 to +1.5 psi) to -1 to +10 bar (-15 to 150 psi)

OPL

Max. 40 bar (600 psi)

Process temperature range

FMB50 -10 to +100 °C (+14 to +212 °F) (+135 °C (+275 °F) for a maximum of 30 minutes) FMB51 -10 to +85 °C (+14 to +185 °F) FMB52 With PE cable (stationary): -10 to +70 °C (+14 to +158 °F) With FEP cable (stationary): -10 to +80 °C (+14 to +176 °F) FMB53 With PE cable (stationary): -10 to +70 °C (+14 to +158 °F) With FEP cable (stationary): -10 to +80 °C (+14 to +176 °F)

Operating temperature range

- Without LCD display: -40 to +85 °C (-40 to +185 °F) (-25 to +85 °C (-13 to +185 °F) under static conditions with IO-Link)
- Without LCD in the case of IO-Link with current output: +70 °C (+158 °F)
- Without LCD in the case of IO-Link **without** current output: +80 °C (+176 °F)
- With LCD display: -20 to +70 °C (-4 to +158 °F)
 Extended temperature application range (-40 to +85 °C (-40 to +185 °F)) with restrictions in optical properties such as display speed and contrast
- With separate housing: −20 to +60 °C (−4 to +140 °F) (installation without insulation)

Reference accuracy

0.2 % (0.1% optionally) depending on the measuring range

Supply voltage

- 11.5 to 45 V_{DC} (versions with plug-in connector 35 V_{DC})
- For intrinsically safe device versions: 11.5 to 30 V_{DC}
- IO-Link communication: 18 V_{DC} required at least (11.5 to 30 V_{DC} if IO-Link is not used but rather the current output)

Output

4 to 20 mA with superimposed HART protocol, IO-Link, PROFIBUS PA or FOUNDATION Fieldbus

Options

- Gold-rhodium coated process membrane
- 3.1 inspection certificate
- 3A approval and EHEDG approval for FMB50

- Specific firmware versions
- Initial device settings can be ordered
- Separate housing

Specialties


- Absolutely resistant to condensate thanks to hermetically sealed CONTITETM cell
- Maximum flexibility thanks to modular design
- Special cleaning of the transmitter to remove paint-wetting impairment substances, for use in paint shops

FMB50, FMB51, FMB52 universal application

- Modular probe program to ensure optimum process adaptation
- FMB50 compact version: installation in the tank from below or from the side
 - FMB51, FMB52 rod and cable extension: installation from above, i.e. easy to retrofit ground tanks, no additional opening in the vessel floor

FMB50 optimized for hygienic applications

- All typical flush-mounted process connections can be supplied
- Welding flanges
- Stainless steel housing
- All the sanitary process connections are gap-free and can be cleaned so that the unit is free of residue, e.g. CIP cleaning
- USDA/H1-approved transfer liquid as per FDA Directive
- 3A approval or EHEDG approvals

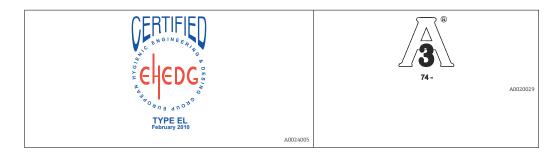


FMB53 for level measurement in water and wastewater

- The housing with the electronic insert is mounted outside shafts and vessels in such a way that it is protected from flooding. The extension cable is secured with a suspension clamp.
- The measuring cell tube made of stainless steel (AISI 316L) and the Alloy process isolating diaphragm allow use in aggressive media such as wastewater for example.
- Extension cable 500 to 300 000 mm (20 to 11810 in) in length (up to 100 m (328 ft) in the hazardous area) without strain relief
- Special measuring cell with gold/platinum coating for acids, alkalis or sea water; \rightarrow \cong 35

Measuring principle

Hydrostatic level measurement

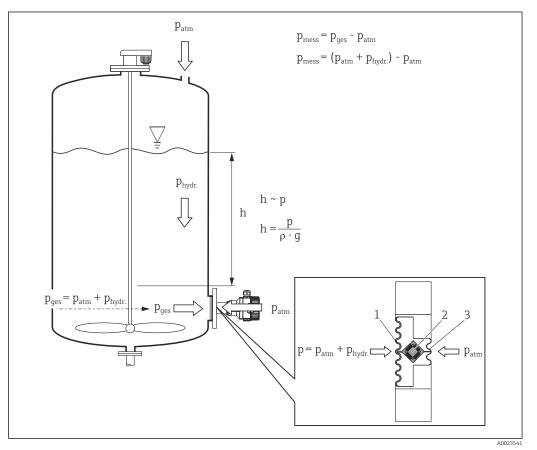

- 1 Process isolating diaphragm
- 2 Measuring element
- 3 Rear isolating membrane of the CONTITE™ measuring cell
- g Gravitational acceleration
- h Level height
- P_{qes} Total pressure = hydrostatic pressure + atmospheric pressure
- *P*_{*atm*} *Atmospheric pressure*
- P_{hydr.} Hydrostatic pressure
- P_{mess} Measured pressure in the measuring cell = hydrostatic pressure
- *ρ* Density of the medium

Due to its weight, a liquid column creates hydrostatic pressure. If the density is constant, the hydrostatic pressure depends solely on the height h of the liquid column.


The CONTITE[™] measuring cell, which works on the principle of the gauge pressure sensor, constitutes the core of Deltapilot M. In contrast to conventional gauge pressure sensors, the precision measuring element (2) in the CONTITE[™] measuring cell is absolutely protected, situated between the process isolating diaphragm (1) and the rear isolating membrane (3). Thanks to this hermetic sealing of the measuring element, the CONTITE[™] measuring cell is absolutely insensitive to condensate/ condensation and aggressive gases. The pressure applied is transferred from the process isolating diaphragm to the measuring element by means of an oil without any loss in pressure.

Any measured errors due to fluctuations in temperature are compensated for in the electronics unit by means of the sensor temperature.

A linearization function with max. 32 points, based on a table entered either manually or semiautomatically, can be activated locally or remotely. This function facilitates measurement in engineering units, and provides a linear output signal for spherical and horizontal cylindrical vessels, and vessels with a conical outlet.

Level measurement in closed
tanks with pressure overlayYou can determine the differential pressure in tanks with pressure overlay using two Deltapilot M.tanks with pressure overlayThe pressure measured values of the two probes are sent to a signal processing unit such as Endress

+Hauser RMA or a PLC. The signal processing unit or PLC determines the difference in pressure and uses this to calculate the level and the density where necessary.

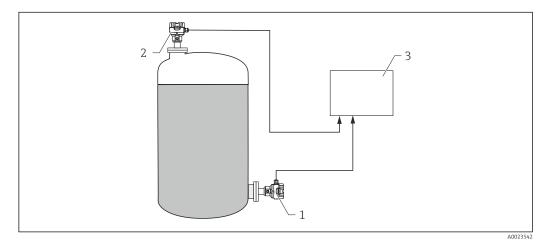

- 1 Deltapilot 1 measures the total pressure (hydrostatic pressure and top pressure)
- 2 Deltapilot 2 measures the top pressure
- 3 Signal processing unit determines the difference in pressure and uses this to calculate the level

NOTICE

Measured errors can occur.

Large measured errors can occur if the ratio of the level to the top pressure is >1:6. This does not affect reproducibility.

 When selecting the measuring cell, make sure you select measuring ranges that are sufficiently wide (see example).

Example:

- Max. hydrostatic pressure = 600 mbar (9 psi)
- Max. top pressure (Deltapilot 2): 300 mbar (4.5 psi)
- Max. total pressure, measured with Deltapilot 1: 300 mbar (4.5 psi) + 600 mbar (9 psi) = 900 mbar (13.5 psi) measuring cell to be selected: 0 to 1200 mbar (0 to 18 psi)
- Max. pressure, measured with Deltapilot 2: 300 mbar (4.5 psi) → measuring cell to be selected: 0 to 400 mbar (0 to 6 psi)

NOTICE


Possibility of probe 2 flooding during differential pressure measurement.

Measured errors can occur.

▶ When installing, make sure that probe 2 cannot be flooded.

Density measurement

You can measure the density in tanks with pressure overlay using two Deltapilot M and a signal processing unit or a PLC. The signal processing unit or the PLC calculates the density from the known distance between the two Deltapilot M devices Δh and the two measured values p_1 and p_2 .

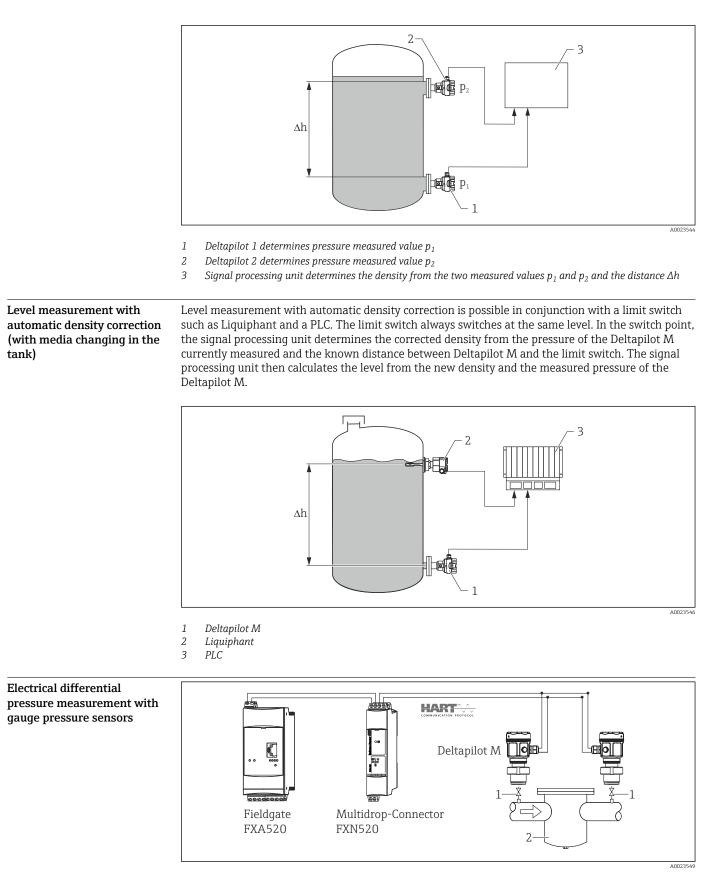

- 1 Shut-off valves
- 2 e.g. filter

In the example given, two Deltapilot M devices (each with a gauge pressure sensor) are interconnected. The pressure difference can thus be measured using two independent Deltapilot M devices.

WARNING

Risk of explosion!

 If using intrinsically safe devices, strict compliance with the rules for interconnecting intrinsically safe circuits as stipulated in IEC60079-14 (proof of intrinsic safety) is mandatory.

Communication protocol	 4 to 20 mA with HART communication protocol 4 to 20 mA with IO-Link communication protocol PROFIBUS PA The Endress+Hauser devices meet the requirements of the FISCO model. Due to a low current consumption of 11 mA ± 1 mA, the following number of devices can be operated on one bus segment if installing as per FISCO: up to 8 devices for Ex ia, CSA IS and FM
	IS applications or up to 31 devices for all other applications, e.g., in non-hazardous areas, Ex nA etc. Further information on PROFIBUS PA can be found in Operating Instructions BA00034S "PROFIBUS DP/PA: Guidelines for planning and commissioning" and in the PNO Guideline. • FOUNDATION Fieldbus
	 The Endress+Hauser devices meet the requirements of the FISCO model. Due to a low current consumption of 16 mA ± 1 mA, the following number of devices can be operated on one bus segment if installing as per FISCO: up to 6 devices for Ex ia, CSA IS and FM IS applications or up to 22 devices for all other applications, e.g., in non-hazardous areas, Ex nA etc. Further information on FOUNDATION Fieldbus, such as requirements for bus system components, can be found in Operating Instructions BA00013S "FOUNDATION Fieldbus Overview".

Input

Measured variable

Measured process variables

Hydrostatic pressure

Measuring range

Sensor	Maximum sensor	measuring range	Smallest calibratable measuring span (preset at the factory) ¹⁾	MWP	OPL	Vacuum resistance	Option ³⁾
	lower (LRL) ⁴⁾	upper (URL)				Synthetic oil/ Inert oil	
[bar (psi)]	[bar (psi)]	[bar (psi)]	[bar (psi)]	[bar (psi)]	[bar (psi)]	[bar _{abs} (psi _{abs})]	
0.1 (1.5)	-0.1 (-1.5)	+0.1 (+1.5)	0.01 (0.15)	2.7 (40.5)	4 (60)		1C
0.4 (6)	-0.4 (-6)	+0.4 (+6)	0.02 (0.3)	5.3 (79.5)	8 (120)		1F
1.2 (18)	-1 (-15)	+1.2 (+18)	0.06 (1)	16 (240)	24 (360)	0.01/0.04 (0.145/0.6)	1H
4 (60)	-1 (-15)	+4 (+60)	0.2 (3)	16 (240)	24 (360)		1M
10 (150)	-1 (-15)	+10 (+150)	0.5 (7.5)	27 (405)	40 (600)		1P

Factory calibration Turn down: Max 20:1, higher on request. 1)


The vacuum resistance applies to the measuring cell at reference conditions. Product Configurator, "Sensor range" ordering feature 2)

3)

4) By default, the device is set to a lower range limit of 0 bar. Please specify in the order if the lower range limit is to be set to a different default value.

Output

	Output				
Output signal	 4 to 20 mA with superimposed digital communication protocol HART 6.0, 2-wire Digital communication signal IO-Link, 3-wire Digital communication signal PROFIBUS PA (Profile 3.02) Digital communication signal FOUNDATION Fieldbus 				
	Output	Optional ¹⁾			
	4 to 20mA HART	2			
	4 to 20mA, IO-Link	7			
	PROFIBUS PA	3			
	FOUNDATION Fieldbus	4			
Signal range 4 to 20 mA	4 to 20 mA HART and IO-Link: 3.8 to 20.5 mA As per NAMUR NE 43				
	 4 to 20 mA HART: Options: Max. alarm: can be set from 21 to 23 mA (factory setting: 22 mA) Hold measured value: last measured value is held Min. alarm: 3.6 mA IO-Link: Max. alarm: permanently set to 22 mA Min. alarm: 3.6 mA Hold measured value: last measured value is held PROFIBUS PA: can be set in the Analog Input block Options: Last Valid Out Value (factory setting), Fail-safe Value, Status Bad FOUNDATION Fieldbus: can be set in the Analog Input block Options: Last Good Value, Fail-safe Value (factory setting), Wrong Value 				
Load - 420 mA HART	Dr				

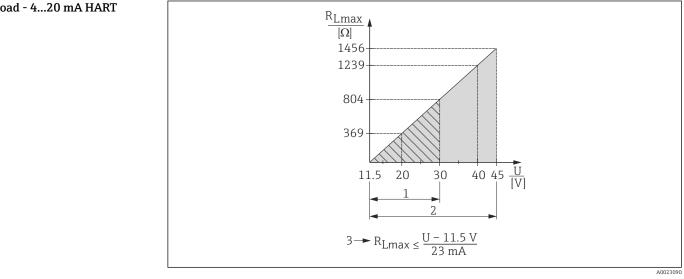

1 Supply voltage 11.5 to 30 V DC for intrinsically safe device versions (not for analog)

2 Supply voltage 11.5 to 45 V DC (versions with plug-in connector 35 V DC) for other types of protection and for uncertified device versions

3 R_{Lmax} Maximum load resistance

U Supply voltage



When operating via a handheld terminal or via a PC with an operating program, a minimum communication resistance of 250 Ω must be taken into account.

Load for current output in In order to guarantee sufficient terminal voltage, a maximum load resistance R_L (including line the case of an IO-Link device resistance) must not be exceeded depending on the supply voltage U_{B} of the supply unit. R_{Lmax} $[\Omega]$ 1022 587 $2 \rightarrow R_{Lmax} \leq \frac{U_B - 6.5V}{23mA}$ 217 30 U_B 11.5 20 0 [V]1


- 1 Power supply 11.5 to 30 V_{DC}
- 2 R_{Lmax} maximum load resistance

 U_B Supply voltage

- Output of failure current and display of "M803" (Output: MIN alarm current)
- Periodic checking to establish if it is possible to quit fault state

Dead time, time constant

Presentation of the dead time and the time constant:

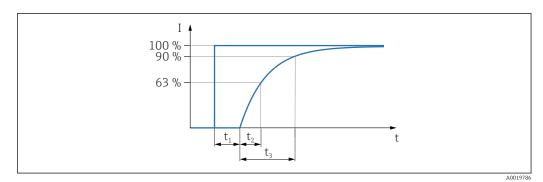

Dynamic behavior, current output (HART electronics)		Device	Dead time (t_1) [ms]	Time constant T63 (= t ₂) [ms]	Time constant T90 (= t ₃) [ms]
	Max.	FMB50	60	90	210
	Max.	FMB51 FMB52 FMB53	500	250	-

Dynamic behavior, digital output (HART electronics)		Device	Dead time (t ₁) [ms]	Dead time (t ₁) [ms] + Time constant T63 (= t ₂) [ms]	Dead time (t ₁) [ms] + Time constant T90 (= t ₃) [ms]
	Min.	FMB50	220	310	370
	Max.		1020	1110	1170
	Min.	FMB51	660	910	-
	Max.	FMB52 FMB53	1460	1710	-

Reading cycle

- Acyclic: max. 3/s, typically 1/s (depends on command # and number of preambles)
- Cyclic (Burst): max. 3/s, typically 2/s

The device commands the BURST MODE function for cyclic value transmission via the HART communication protocol.

Cycle time (update time)

Cyclic (Burst): min. 300 ms

Response time

When recording step responses, it is important to bear in mind that the response times of the sensor might be added to the specified times.

Acyclic: min. 330 ms, typically 590 ms (depending on command # and number of preambles)
Cyclic (Burst): min. 160 ms, typically 350 ms (depending on command # and number of preambles)

Dynamic behavior, PROFIBUS PA		Device	Dead time (t ₁) [ms]	Dead time (t ₁) [ms] + Time constant T63 (= t ₂) [ms]	Dead time (t ₁) [ms] + Time constant T90 (= t ₃) [ms]
	Min.	FMB50	95	185	245
	Max.		1195	1285	1345
	Min.	FMB51	535	785	-
	Max.	FMB52 FMB53	1635	1885	-

Reading cycle (SPS)

- Acyclic: typically 25/s
- Cyclic: typically 30/s (dependent on the number and type of function blocks used in a closedcontrol loop)

Cycle time (update time)

Min. 100 ms

The cycle time in a bus segment in cyclic data communication depends on the number of devices, on the segment coupler used and on the internal PLC cycle time.

Response time

- Acyclic: approx. 23 ms to 35 ms (depending on Min. Slave Interval)
- Cyclic: approx. 8 ms to 13 ms (depending on Min. Slave Interval)

Dynamic behavior, FOUNDATION Fieldbus

	Device	Dead time (t ₁) [ms]	Dead time (t ₁) [ms] + Time constant T63 (= t ₂) [ms]	Dead time (t ₁) [ms] + Time constant T90 (= t ₃) [ms]
Min.	FMB50	105	195	255
Max.		1105	1195	1255
Min.	FMB51	545	795	-
Max.	FMB52 FMB53	1545	1795	-

Reading cycle

- Acyclic: typically 5/s
- Cyclic: max. 10/s (dependent on the number and type of function blocks used in a closed-control loop)

Cycle time (update time)

Cyclic: min. 100 ms

Response time

- Acyclic: typically 70 ms (for standard bus parameter settings)
- Cyclic: max. 20 ms (for standard bus parameter settings)

IO-Link		Dead time (t ₁) [ms]	Time constant (T63), t ₂ [ms]	Time constant (T90), t ₃ [ms]		
	Min.	60 ms + cycle time	90 ms + cycle time	210 ms + cycle time		
	 Reading cycle Acyclic: cyclic/n where n is dependent on the size of the acyclic data Cyclic: min. 100/s Cycle time (update time) Cyclic: min. 10 ms Response time Cyclic: < 10 ms at 38.4 kbps Cyclic: < 10 ms at 38.4 kbps When recording step responses, it is important to bear in mind that the response times of the sensor might be added to the specified times. 					
Damping	 A damping affects all outputs (output signal, display): Via onsite display (not analog), handheld terminal or PC with operating program, continuous fro 0 to 999 s Via DIP switch on the electronic insert (not IO-Link), "on" (= set value) and "off" (= damping switched off) Factory setting: 2 s 					
Firmware version	Desig	nation	Option ¹⁾			
	01.00	.zz, FF, DevRev01	76			
	01.00	.zz, PROFIBUS PA, DevRev	77			
	01.00	78				
	1) Product Configurator, "Firmware version" ordering feature					
Galvanic isolation	 FMI 	ollowing devices have a g B51, FMB52, FMB53 B50 with separate housi	galvanic isolation between electro	onic and probe:		
HART protocol-specific data	Manu	facturer ID	17 (11 hex)			
		e type ID	35 (23 hex)			
	Device	e revision	01 (01 hex) - SW version 01.	.00.zz		
	HART	specification	6			
	DD re	vision	01 (Dutch))02 (Russian))			
	Device	e description files (DTM, DI	D) Information and files under: • www.endress.com • www.fieldcommgroup.org/	/registered-products		
		'load Min. 250 Ω				

	HART device variables	The following measured values are assigned to the device variables: Measured values for PV (primary variable) Pressure Level Tank content Measured values for SV, TV (second and third variable) Pressure Level	
	Supported functions	Measured values for QV (fourth device variable) Temperature • Burst mode • Additional transmitter status • Device locking • Alternative modes of operation	
Wireless HART data	Minimum starting voltage	11.5 V ¹⁾	
	Start-up current	12 mA (default) or 22 mA (customer setting)	
	Starting time	5 s or 7 s for rod/cable version	
	Minimum operating voltage	11.5 V ¹⁾	
	Multidrop current	4 mA	
	Time for connection setup	1 s	
	1) Or higher if operating near am	bient temperature limits (–40 to +85 °C (–40 to +185))	
IO-Link protocol-specific data	IO-Link is a point-to-point connection for communication between the device and an IO-Link mas The IO-Link communication interface enables direct access to the process and diagnostic data. It a provides the option of configuring the device while in operation.		
	The device supports the following	features:	
	IO-Link specification	Version 1.1	
	IO-Link Smart Sensor Profile 2nd Edition	Supported: Identification Diagnosis Digital measuring sensor (as per SSP 4.3.3)	
	IO-Link transfer rate	COM2; 38.4 kBaud	
	Minimum cycle time	10 ms	
	Process data width	4 bytes process data 2 bytes diagnostic data	
	IO-Link data storage	Yes	
	Block configuration according to V1.1	Yes	

Device description

Device operational

In order to integrate field devices into a digital communication system, the IO-Link system requires a description of the device parameters such as output data, input data, data format, quantity of data and supported IO-Link transfer rate.

measured value after 2 s)

5 s after the supply voltage is applied, the device is operational (first valid

These data are contained in the device description (IODD $^{1)}$) which is made available to the IO-Link master via generic modules during commissioning of the communication system.



The IODD can be downloaded as follows:

Endress+Hauser: www.endress.comIODDfinder: https://ioddfinder.io-link.com/#/

Protocol-specific data	Manufacturer ID	17 (11 hex)
PROFIBUS PA	Ident number	1554 hex
	Profile Version	3.02 SW Version 01.00.zz
	GSD Revision	5
	DD Revision	1
	GSD File	Information and files can be found:
	DD Files	www.endress.comwww.profibus.org
	Output values	Measured values for PV (via Analog Input Function Block) Pressure Level Tank content
		Measured values for SV Pressure Temperature
	Input values	Input value sent from PLC, can be shown on display
	Supported functions	 Identification & Maintenance Simple device identification via control system and nameplate Condensed status Automatic ident number adaptation and switchable to following ident numbers: 9700: Profile-specific transmitter identification number with the "Classic" or "Condensed" status. 1503: 1503: Compatibility mode for the old Deltapilot M (DB50, DB50L, DB51, DB52, DB53). 1555: Identification number for the new Deltapilot M (FMB50,

FOUNDATION Fieldbus protocol-specific data

Device type	0x1023
Device revision	01 (hex)
DD revision	0x01021
Device description files (DTM, DD)	Information and files under:
	www.endress.comwww.fieldcommgroup.org/registered-products
CFF revision	0x000102
ITK version	5.2.0
ITK certification driver no.	IT067500
Link Master functionality supported (LAS)	Yes
Link Master/Basic Device selectable	Yes; Factory setting: Basic Device
Number of VCRs	44
Number of link objects in VFD	50
Number of FB schedule objects	40

FMB51, FMB52, FMB53).

• Device locking: The device can be locked by hardware or software.

1) IO Device Description

Virtual communication references (VCRs)

Permanent entries	44
Client VCRs	0
Server VCRs	5
Source VCRs	8
Sink VCRs	0
Subscriber VCRs	12
Publisher VCRs	19

Link settings

Slot time	4
Min. inter PDU delay	12
Max. response delay	40

Transducer Blocks

Block	Content	Output values
TRD1 Block	Contains all parameters related to the measurement	 Pressure or level (channel 1) Process temperature (channel 2) Measured pressure value (channel 3) Max. pressure (channel 4) Level before linearization (channel 5)
Diagnostic Block	Contains diagnostic information	Error code via DI channels (channel 10 to 15)
Display Block	Contains parameters to configure the onsite display	No output values

Function blocks

Block	Content	Number of blocks	Execution time	Functionality
Resource Block	The Resource Block contains all the data that uniquely identify the device. It is an electronic version of a nameplate of the device.	1		Enhanced
Analog Input Block 1 Analog Input Block 2	The AI Block receives the measuring data from the Sensor Block, (selectable via a channel number) and makes the data available to other function blocks at its output. Enhancement: digital outputs for process alarms, fail safe mode.	2	25 ms	Enhanced
Digital Input Block	This block contains the discrete data of the Diagnostic Block (selectable via a channel number 10 to 15) and provides them for other blocks at the output.	1	20 ms	Standard
Digital Output Block	This block converts the discrete input and thus initiates an action (selectable via a channel number) in the DP Flow Block or in the TRD1 Block. Channel 20 resets the counter for max. pressure transgressions value.	1	20 ms	Standard
PID Block	The PID Block serves as a proportional-integral-derivative controller and is used almost universally for closed-loop-control in the field including cascade and feedforward. Input IN can be indicated on the display. The selection is performed in the Display Block (DISPLAY_MAIN_LINE_CONTENT).	1	40 ms	Standard
Arithmetic Block	This block is designed to permit simple use of popular measurement math functions. The user does not have to know how to write equations. The math algorithm is selected by name, chosen by the user for the function to be performed.	1	35 ms	Standard

Block	Content	Number of blocks	Execution time	Functionality
Input Selector Block	The Input Selector Block facilitates the selection of up to four inputs and generates an output based on the configured action. This block normally receives its inputs from AI Blocks. The block performs maximum, minimum, average and 'first good' signal selection. Inputs IN1 to IN4 can be indicated on the display. The selection is performed in the Display Block (DISPLAY_MAIN_LINE_1_CONTENT).	1	30 ms	Standard
Signal Characterizer Block	The Signal Characterizer Block has two sections, each with an output that is a non-linear function of the respective input. The non-linear function is generated by a single look-up table with 21 arbitrary x-y pairs.		40 ms	Standard
Integrator Block	The Integrator Block integrates a variable as a function of the time or accumulates the counts from a Pulse Input Block. The block may be used as a totalizer that counts up until reset or as a batch totalizer that has a setpoint, where the integrated value or accumulated value is compared to pre-trip and trip settings, generating a binary signal when the setpoint is reached.	1	35 ms	Standard

Additional function block information:

Instantiate function bl	ocks	Yes
Number of additional i	instantiate function blocks	20

Power supply


WARNING

Limitation of electrical safety due to incorrect connection!

- When using the measuring device in hazardous areas, installation must comply with the corresponding national standards and regulations and the Safety Instructions or Installation or Control Drawings.
- ► All explosion protection data are given in separate documentation which is available upon request. The Ex documentation is supplied as standard with all Ex devices .
- ▶ In accordance with IEC/EN61010 a suitable circuit breaker must be provided for the device.
- HART: Overvoltage protection HAW569-DA2B for the non-hazardous area, ATEX II 2 (1) Ex ia IIC and IEC Ex ia can be ordered as an option (see "Ordering information" section).
- Protective circuits against reverse polarity, HF influences and overvoltage peaks are integrated.


Terminal assignment

HART, PROFIBUS PA, FOUNDATION Fieldbus

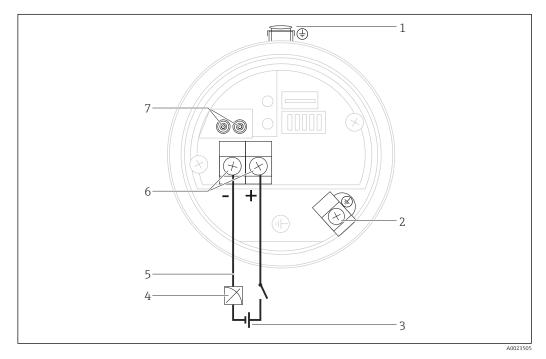

- 1 External ground terminal (only for devices with certain approvals or if "Measuring point" (TAG) is ordered)
- 2 Internal ground terminal
- 3 Supply voltage $\rightarrow \square 24$
- 4 4 to 20 mA for HART devices
- 5 For HART and FOUNDATION Fieldbus devices: With a handheld terminal, all the parameters can be configured anywhere along the bus line via menu operation.
- 6 Terminals
- 7 For HART devices: test terminals, see section "Taking 4 to 20 mA test signal" → 🖺 24

IO-Link



- 1 Supply voltage +
- 2 4-20 mA
- 3 Supply voltage -
- 4 C/Q (IO-Link communication)

Supply voltage

4 to 20 mA HART

Type of protection	Supply voltage	
Intrinsically safe	11.5 to 30 V DC	
Other types of protectionDevices without certificate	11.5 to 45 V DC (versions with plug-in connector 35 V DC)	

Taking 4 to 20 mA test signal

A 4 to 20 mA test signal may be measured via the test terminals without interrupting the measurement.

IO-Link

- 11.5 to 30 V DC if only the analog output is used
- 18 to 30 V DC if IO-Link is used

PROFIBUS PA

Version for non-hazardous areas: 9 to 32 V DC

FOUNDATION Fieldbus

Version for non-hazardous areas: 9 to 32 V DC

Current consumption

- IO-Link < 60 mA</p>
- PROFIBUS PA: 11 mA ±1 mA, switch-on current corresponds to IEC 61158-2, Clause 21
- FOUNDATION Fieldbus: 16 mA ±1 mA, switch-on current corresponds to IEC 61158-2, Clause 21

Electrical connection

Cable entry	Degree of protection	Option ¹⁾
M20 gland	IP66/68 NEMA 4X/6P	А
G ½" thread	IP66/68 NEMA 4X/6P	С
NPT ½" thread	IP66/68 NEMA 4X/6P	D
M12 plug	IP66/67 NEMA 4X/6P	Ι
7/8" plug	IP66/68 NEMA 4X/6P	М
HAN7D plug 90 deg.	IP65	Р
PE cable 5m (Only for FMB50)	IP66/68 NEMA4X/6P + pressure compensation via cable	S
M16 valve connector	IP64	V

1) Product Configurator, "Electrical connection" ordering feature

PROFIBUS PA

The digital communication signal is transmitted to the bus via a twin-core connecting cable. The bus line also provides the power supply. For further information on the network structure and grounding, and for further bus system components such as bus cables, see the relevant documentation, e.g., Operating Instructions BA00034S "PROFIBUS DP/PA: Guidelines for planning and commissioning" and the PNO Guideline.

FOUNDATION Fieldbus

The digital communication signal is transmitted to the bus via a twin-core connecting cable. The bus line also provides the power supply. For further information on the network structure and grounding and for further bus system components such as bus cables, see the relevant documentation, e.g., Operating Instructions BA00013S "FOUNDATION Fieldbus Overview" and the FOUNDATION Fieldbus Guideline.

Terminals

- Supply voltage and internal ground terminal: 0.5 to 2.5 mm² (20 to 14 AWG)
- External ground terminal: 0.5 to 4 mm² (20 to 12 AWG)


Cable entry

Approval	Туре	Clamping area
Standard, CSA GP FM/ CSA IS	Plastic M20x1.5	5 to 10 mm (0.2 to 0.39 in)
ATEX II1/2D Ex t, II1/2GD Ex ia, II3G Ex nA, IEC Ex t Da/Db	Metal M20x1.5 (Ex e)	7 to 10.5 mm (0.28 to 0.41 in)

For other technical data, see the housing section \rightarrow \cong 39

Connector

Devices with valve connector (HART)

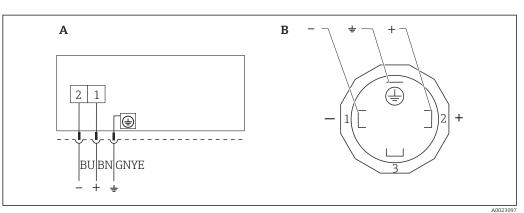


I BN = brown, BU = blue, GNYE = green

A Electrical connection for devices with valve connector

B View of the plug connector at the device

Material: PA 6.6


Connecting devices with Harting plug Han7D (HART)

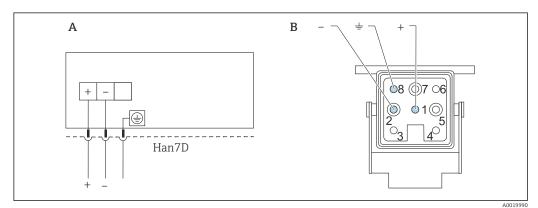

- A Electrical connection for devices with Harting plug Han7D
- *B* View of the connection on the device
- Brown
- ≟ Green/yellow
- + Blue

Material: CuZn, gold-plated contacts of plug-in jack and plug

Connecting the cable version (FMB50 only)

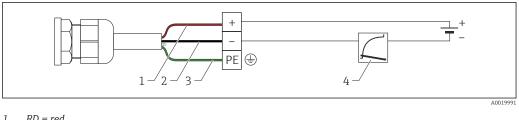


1 RD = red

BK = black 2 3

GNYE = green 4

4 to 20 mA

Connecting devices with M12 plug (HART, PROFIBUS PA)

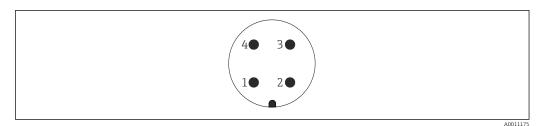

- 1 Signal +
- Not assigned 2
- 3 Signal -
- 4 Earth

Endress+Hauser offers the following accessories for devices with an M12 plug:

- Plug-in jack M 12x1, straight
- Material: body PA; coupling nut CuZn, nickel-plated
- Degree of protection (fully locked): IP66/67
- Order number: 52006263


Plug-in jack M 12x1, elbowed

- Material: body PBT/PA; coupling nut GD-Zn, nickel-plated
- Degree of protection (fully locked): IP66/67
- Order number: 71114212

Cable 4 x 0.34 mm² (20 AWG) with M12 socket, elbowed, screw plug, length 5 m (16 ft)

- Material: body PUR; coupling nut CuSn/Ni; cable PVC
- Degree of protection (fully locked): IP66/67
- Order number: 52010285

Connecting devices with M12 plug (IO-Link)




- Supply voltage + 1
- 4-20 mA 2
- Supply voltage -3
- C/Q (IO-Link communication) 4

Connecting devices with 7/8" plug (HART, FOUNDATION Fieldbus)

	A0011176 1 Signal - 2 Signal + 3 Shield 4 Not assigned
	External thread: 7/8 - 16 UNC • Material: 316L (1.4401) • Degree of protection: IP66/68
Cable specification	HART
	Endress+Hauser recommends using twisted, shielded twin-core cables.The cable outer diameter depends on the cable entry used.
	IO-Link
	Endress+Hauser recommends using twisted, four-core cable.
	PROFIBUS PA
	Endress+Hauser recommends using twisted, shielded twin-core cable, preferably cable type A.
	For further information regarding cable specifications, see Operating Instructions BA00034S "PROFIBUS DP/PA: Guidelines for planning and commissioning", the PNO guideline 2.092 "PROFIBUS PA User and Installation Guideline" and IEC 61158-2 (MBP).
	FOUNDATION Fieldbus
	Use a twisted, shielded twin-core cable, preferably cable type A.
	For further information on the cable specifications, see Operating Instructions BA00013S "FOUNDATION Fieldbus Overview", FOUNDATION Fieldbus Guideline and IEC 61158-2 (MBP).
Start-up current	 12 mA or 22 mA (selectable) IO-Link: 12 mA
Residual ripple	No influence on 4 to 20 mA signal up to \pm 5 % residual ripple within the permitted voltage range [according to HART hardware specification HCF_SPEC-54 (DIN IEC 60381-1)].
Influence of power supply	≤0.001 % of URL/V
Overvoltage protection (optional)	The device can be fitted with overvoltage protection. The overvoltage protection is mounted at the factory on the housing thread (M20x1.5) for the cable gland and is approx. 70 mm (2.76 in) in length (take additional length into account when installing). The device is connected as illustrated in the following graphic.
	For details refer to TI01013KDE, XA01003KA3 and BA00304KA2.
	Ordering information:
	Product Configurator, "Mounted accessories" ordering feature, option NA

Wiring

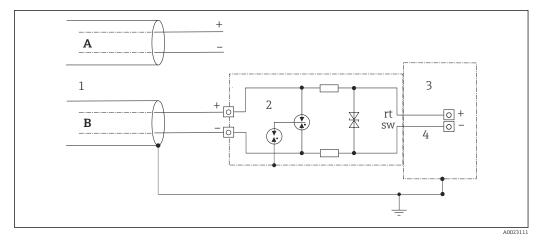

- Without direct shield grounding With direct shield grounding Incoming connecting cable HAW569-DA2B Unit to be protected Connecting cable Α
- В
- 1
- 2
- 3
- 4

Performance characteristics of metallic process membrane

Reference operating conditions	 Humidity φ= const Ambient pressure Position of the me FMB50: ±1° horizo FMB51/FMB52/F Input of LOW SEN Span based on zero Material of the pro (AuRh or AuPt) 	MB53: ±1° vertically SOR TRIM and HIGH SENSOF o point ocess membrane: Alloy C276 terial (meter body): Alloy C2 c oil (FDA)/inert oil V DC ±3 V DC	⁶ rH f: 860 to 1060 mbar (12 e range of: R TRIM for lower range v (2.4819) and Alloy C27	2.47 to 15.37 psi) alue and upper range value 6 (2.4819) with coating
Influence of the orientation	■ < 5 mbar (0.075 p	5 psi) if synthetic oil is used si) if inert oil is used. dent zero shift can be correct		
Calibration position				
	1 FMB50 2 FMB51, FMB52, F To minimize the effe offset is preset at the	ect of the orientation (e.g., in	the case of vertical devic	A0023545 re installation), position
Resolution		(factory setting: presentation		-
Reference accuracy		acy comprises the non-lineari as per IEC 60770. The data re		
	Measuring cell	Reference accuracy in % of		
		TD	Option "Standard" ¹⁾	Option "Platinum" ¹⁾
	100 mbar (1.5 psi)	 TD 1:1 to TD 2:1 TD > 2:1 to TD 4:1 	 ±0.2 ±0.1 x TD 	 ±0.15 ±0.075 x TD
	400 mbar (6 psi)	 TD 1:1 to TD 4:1 TD > 4:1 to TD 10:1 	 ±0.2 ±0.05 x TD 	 ±0.15 ±0.0375 x TD
	1.2 bar (18 psi)	 TD 1:1 to TD 2:1 TD > 2:1 to TD 12:1 	 ±0.2 ±0.1 x TD 	 ±0.1 ±0.05 x TD
	4 bar (60 psi)	• TD 1:1 to TD 4:1	• ±0.2	• ±0.1

1) Product Configurator, "Reference accuracy" ordering feature

10 bar (150 psi)

TD > 4:1 to TD 20:1

• TD 1:1 to TD 2.5:1

• TD > 2.5:1 to TD 20:1

• ±0.05 x TD

• ±0.08 x TD

• ±0.2

• ±0.025 x TD

• ±0.04 x TD

• ±0.1

Thermal change in the zero output and the output span	Version	Measuring cell	−10 to +60 °C (+14 to +140 °F)	+60 to +85 °C (+140 to +185 °F)	FMB50 only: +85 to +100 °C (+185 to +212 °F)
			% of the calibrated sp	an	
	FMB50 FMB51/52/53 snap-on	100 mbar (1.5 psi)	< (0.32 + 0.30 x TD)	< (0.34 + 0.40 x TD)	< (0.34 + 0.55 x TD)
	FMB51/52/53 welded	100 mbar (1.5 psi)	< (0.32 + 0.50 x TD)	< (0.34 + 0.60 x TD)	-
	FMB50/51/52/53	400 mbar (6 psi)	< (0.31 + 0.25 x TD)	< (0.32 + 0.30 x TD)	-
		1.2 bar (18 psi), 4 bar (60 psi), 10 bar (150 psi)	< (0.31 + 0.10 x TD)	< (0.32 + 0.15 x TD)	< (0.33 + 0.20 x TD)

Total performance

The "Total performance" specification comprises the non-linearity including hysteresis, non-reproducibility as well as the thermal change in the zero point.

Total performance in	Total performance in % of the URL				
Version	Measuring cell	-10 to +60 °C (+14 to +140 °F)	+60 to +85 °C (+140 to +185 °F)	FMB50 only: +85 to +100 °C (+185 to +212 °F)	
FMB50 FMB51/52/53 snap-on	100 mbar (1.5 psi)	< 0.35	< 0.45	< 0.6	
FMB51/52/53 welded	100 mbar (1.5 psi)	< 0.8	< 1	-	
FMB50/51/52/53	400 mbar (6 psi)	< 0.35	< 0.45	< 0.6	
	1.2 bar (18 psi), 4 bar (60 psi), 10 bar (150 psi)	< 0.15	< 0.2	< 0.25	

Long-term stability	Measuring cell	Long-term stability [%]
	100 mbar (1.5 psi)	 < 0.18 of the upper range limit (URL)/year < 0.45 of the upper range limit (URL)/5 years
	400 mbar (6 psi), 1.2 bar (18 psi)	 < 0.1 of the upper range limit (URL)/year < 0.25 of the upper range limit (URL)/5 years
	4 bar (60 psi), 10 bar (150 psi)	 < 0.05 of the upper range limit (URL)/year < 0.125 of the upper range limit (URL)/5 years

Total error

The total error comprises the long-term stability and the total performance:

Measuring cell	% of the URL/year (in the permitted temperature range)
100 mbar (1.5 psi)	Snap-on: ±0.63Welded: ±1.0
400 mbar (6 psi),	±0.61
1.2 bar (18 psi)	±0.27
4 bar (60 psi), 10 bar (150 psi)	±0.25

Warm-up time


• 4 to 20 mA HART:

- FMB50 = ≤ 5 s
 FMB51/FMB52/FMB53 = ≤ 8 s
- IO-Link: < 1 s
- PROFIBUS PA: $\leq 8 \text{ s}$
- FOUNDATION Fieldbus: ≤ 20 s (≤ 45 s after a TOTAL reset)

	5
General installation instructions	The position-dependent zero point shift can be corrected: • directly at the device via operating keys on the electronic insert
	directly at the device via operating keys on the displayvia digital communication if the cover is not open.
	Endress+Hauser offers a mounting bracket for installing the device on pipes or walls.
FMB50	Level measurement
	 Always install the device below the lowest measuring point. Do not install the device at the following positions: in the filling curtain in the tank outflow or at a point in the tank that can be affected by pressure pulses from the agitator The calibration and functional test can be carried out more easily if you mount the device downstream of a shutoff device. Deltapilot M must be included in the insulation for media that can harden when cold.
	Pressure measurement in gases
	Mount Deltapilot M with shutoff device above the tapping point so that any condensate can flow in the process.
	Pressure measurement in steams
	Use a siphon if measuring pressure in steams.
	The siphon reduces the temperature to almost the ambient temperature.
	Pressure measurement in liquids
	Mount Deltapilot M with the shutoff device below or at the same level as the tapping point.
FMB51/FMB52/FMB53	 When mounting rod and cable versions, make sure that the probe head is located at a point as free as possible from flow. To protect the probe from impact resulting from lateral movement, mount the probe in a guide tube (preferably made of plastic) or secure it with a clamping fixture. In the case of devices for hazardous areas, comply strictly with the safety instructions when the housing cover is open. The length of the extension cable or the probe rod is based on the planned level zero point. The height of the protective cap must be taken into consideration when designing the layout of th measuring point. The level zero point (E) corresponds to the position of the process isolating diaphragm. Level zero point = E; top of the probe = L.
	A00235 Engineering unit mm (in)
	Engineering unit mm (in) Suspension clamp (required for FMB53)


Mounting

Ordering information: Order number: 52010869 Product Configurator, "Accessory enclosed" ordering feature, option "PO". A0023566

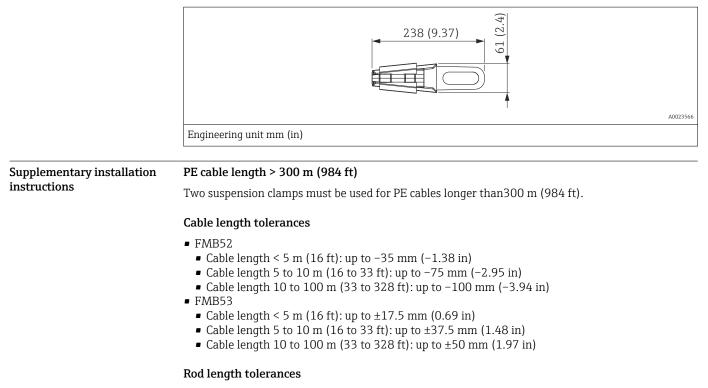

FMB51: Rod length < 4000 mm (157 in): up to -4 mm (-0.16 in)

Wall and pipe mounting, Endress+Hauser offers the following mounting bracket for installing the device on pipes or walls: transmitter (optional)

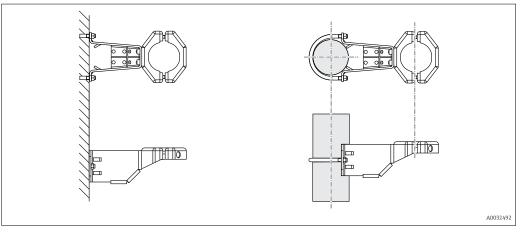

Ordering information:

- included in the delivery for the FMB50/51/52 with a separate housing (available for order via feature "Separate housing") and for the FMB53
- available for order as a separate accessory (Part No.: 71102216).

Further details $\rightarrow \cong 55$.


"Separate housing" version

With the "separate housing" version, you are able to mount the housing with the electronics insert at a distance from the measuring point. This allows for trouble-free measurement:

- Under particularly difficult measuring conditions (at installation locations that are cramped or difficult to access)
- If rapid cleaning of the measuring point is required
- If the measuring point is exposed to vibrations
- You can choose between different cable versions:
- PE: 2 m (6.6 ft), 5 m (16 ft) and 10 m (33 ft)
- FEP: 5 m (16 ft).
- Ordering information:
- Product Configurator, "Separate housing" ordering feature
- Product Configurator, "Enclosed accessories" ordering feature, option PA

For the dimensions $\rightarrow \square 55$

In the case of the "separate housing" version, the sensor is delivered with the process connection and cable ready mounted. The housing and a mounting bracket are enclosed as separate units. The cable is provided with a socket at both ends. These sockets are simply connected to the housing and the sensor.

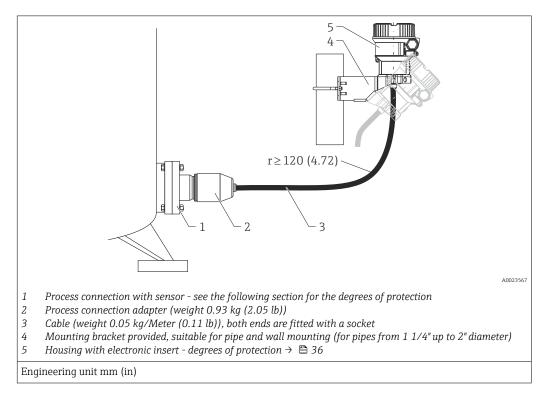

Degree of protection for the process connection and sensor with the use of

- FEP-cabel:
 - IP 69²⁾
 - IP 66 NEMA 4/6P
 - IP 68 (1,83 mH₂O für 24 h) NEMA 4/6P
- PE-cabel:
 - IP 66 NEMA 4/6P
 - IP 68 (1,83 mH₂O für 24 h) NEMA 4/6P

Technical data of the PE and FEP cable:

- Minimum bending radius: 120 mm (4.72 in)
- Cable extraction force: max.450 N (101.16 lbf)
- Resistance to UV light

²⁾ Identification of IP protection category according to DIN EN 60529. The earlier designation "IP69K" according to DIN 40050 Part 9 is no longer valid (the standard was withdrawn on November 1, 2012). The tests required for both standards are identical.

	Use in hazardous area: Intrinsically safe installations (Ex ia/IS) FM/CSA IS: for Div.1 installation only					
Oxygen applications	 Oxygen and other gases can react explosively to oils, grease and plastics, such that, among other things, the following precautions must be taken: All components of the system, such as measuring devices, must be cleaned in accordance with the BAM (DIN 19247) requirements. Depending on the materials used, a certain maximum temperature and a maximum pressure must not be exceeded for oxygen applications. The maximum temperature T_{max} for oxygen applications is 60 °C (140 °F). The devices suitable for gaseous oxygen applications are listed in the following table with the specification p_{max}. 					
	Order code for devices ¹⁾ , cleaned for oxygen applications					
	FMB50 ²⁾	 Depends on the lowest-rated element, with regard to pressure, of the selected components: over pressure limit (OPL) of the sensor, process connection (1.5 x PN)³⁾ Depends on the fill fluid⁴⁾ 				
	FMB51 ²⁾	 Depends on the lowest-rated element, with regard to pressure, of the selected components: over pressure limit (OPL) of the sensor or process connection (1.5 PN)³⁾ Depends on the fill fluid ⁴⁾ Depends on seal material 				
	 Device only, not accessory or enclosed accessory Product Configurator, "Service" ordering feature, option "HB" → 14, "Measuring range" section and → 41, "Mechanical construction" section Oxygen applications possible with FKM seal and inert oil. 					
PWIS cleaning	Special cleaning of the transmitter to remove paint-wetting substances, for use in paint shops, for instance.					
	Ordering information:					
	Ordering information: Product Configurator, "Service" ordering feature, option HC					
	The stability of the materials used must be checked before using them in the medium.					
	The protective cap of the process isolating diaphragm must be removed if necessary (FMB51/ FMB52/ FMB53).					
Applications with hydrogen	A gold-plated metal process isolating diaphragm offers universal protection against hydrogen diffusion, both in gas applications and in applications with aqueous solutions.					
	Applications with hydrogen in aqueous solutions					
	Agold/rhodium-plated metal process isolating diaphragm (AU/Rh) offers effective protection against hydrogen diffusion.					
Special measuring cells for acids, alkalis or sea water (not FMB50)	For acids, alkalis or sea water, Endress+Hauser offers process isolating diaphragms with a gold/ platinum coating.					
	With temperature exposure (up to85 °C (185 °F)) there is an additional zero point deviation of 1.1 mbar (0.0165 psi).					
	Ordering information:					
	Product Configurator, "Process isolating diaphragm material" ordering feature, option N					

• Without LCD display: -40 to +85 °C (-40 to +185 °F) (-25 to +85 °C (-13 to +185 °F) under static

• Without LCD in the case of IO-Link with current output: +70 °C (+158 °F)

	 Without LCD in the case of IO-Link with current output: +70 C (+158 F) Without LCD in the case of IO-Link without current output: +80 °C (+176 °F) With LCD display: -20 to +70 °C (-4 to +158 °F) Extended temperature application range (-40 to +85 °C (-40 to +185 °F)) with restrictions in optical properties such as display speed and contrast With separate housing (not for diaphragm seal): -20 to +60 °C (-4 to +140 °F) (installation without insulation) For applications with very high temperatures, a diaphragm seal with a temperature isolator can be used. Use a mounting bracket! If vibrations also occur in the application, Endress+Hauser recommends you use a diaphragm seal with a capillary. 						
	Optional, enclosed access M12 plug-in jack, 90 deg. e		meter cable: –2	25 to +70 ℃ (-13 to	+158 °F)		
Ambient temperature limits	Version	FMB50	FMB51	FMB52	FMB53		
	Without LCD display	−40 to +85 °C	(–40 to +185 °F)	With PE cable: -40 to +70 °C (-40 to +158 °F) With FEP cable: -40 to +80 °C (-40 to +176 °F			
	With LCD display ¹⁾	-20 to +70 °C (-4 to +158 °F)					
	With M12 plug , elbowed	−25 to +85 °C	(–13 to +185 °F)	With PE cable: -25 to +70 °C (-13 to +158 °F) With FEP cable: -25 to +80 °C (-13 to +176 °F)			
	With separate housing (PE and FEP cable)	-20 to +60 °C (-4 to +140 °F)					
_	1) Extended temperature a properties such as displ			-40 to +185 °F)) with	restrictions in optical		
Storage temperature range	Version	FMB50	FMB51	FMB52	FMB53		
	Without LCD display	-40 to +90 °C	(-40 to +194 °F)	With PE cable: -40 to +70 °C (-40 to +158 °F)			
	With LCD display ¹⁾	–40 to +85 °C (–40 to +185 °F)		With FEP cable: -40 to +80 °C (-40 to +176 °F)			
	With M12 plug, elbowed	−25 to +70 °C (−13 to +158 °F)		With PE cable: -25 to $+70$ °C (-13 to $+158$ °F) With FEP cable: -25 to $+70$ °C (-13 to $+158$ °F			
	With separate housing and FEP cable	-20 to +60 °C (-4 to +140 °F)					
	1) Extended temperature application range (-40 to +85 °C (-40 to +185 °F)) with restrictions in optical properties such as display speed and contrast						
Climate class	Class 4K4H (air temperature: –20 to +55 °C (–4 to +131 °F), relative humidity: 4 to 100%) satisfied as per DIN EN 60721-3-4 (condensation possible)						
Degree of protection	Depending on the used electrical connection $\rightarrow \textcircled{24}$ F31 housing: IP 68 (1,83 mH2O for 24 h) Ordering information:						

Product Configurator, "Electrical connection" ordering feature

Environment

conditions with IO-Link)

Device

Operating temperature range

Vibration resistance	Device/accessory	Test standard	Vibration resistance
	FMB50, FMB52, FMB53	 GL VI-7-2 Part 7: Guidelines for the Performance of Type Approvals Chapter 2: Test Requirements for Electrical / Electronic Equipment and Systems 	Guaranteed for: 5 to 25 Hz: ±1.6 mm (0.06 in); 25 to 100 Hz: 4 g in all 3 axes
	FMB50, FMB52, FMB53 with mounting bracket	IEC 61298-3	Guaranteed for: 10 to 60 Hz: ±0.15 mm (0.01 in); 60 to 500 Hz: 2 g in all 3 axes
	FMB51	IEC 60068-2-6	Guaranteed for: 10 to 60 Hz: ±0.075 mm (0.003 in) 60 to 150 Hz 1g in all 3 axes

Electromagnetic compatibility

• Electromagnetic compatibility as per all the relevant requirements of the EN 61326 series and NAMUR Recommendation EMC (NE21).

• Max. deviation during EMC-tests : < 0.5 % of the span

• All tests were performed with full measurement range (TD 1:1).

Further details can be found in the manufacturer declaration.

Process

Process temperature range	FMB50	FMB51	FMB52	FMB53
	-10 to +100 °C (+14 to +212 °F) 135 °C (275 °F) for 30 min.	-10 to +85 °C (+14 to +185 °F)	With PE cable: -10 to +70 With FEP cable: -10 to +80	,
	maximum		Min. process temperature v seal: -3 °C (+27 °F)	vhen using the KALREZ
Lateral load FMB51 (static)	≤30 Nm (22.13 lbf ft)			
Pressure specifications	 WARNING The maximum pressure for tregard to pressure (component accessories). Only operate the measurin MWP (maximum working to a reference temperature time. Note temperature det the permitted pressure value temperature property, the the chemical composition of latest version of the standar provided in the relevant se The test pressure corresponder to the Pressure Equipment D corresponds to the MWP (In the case of sensor range process connection is small factory, at the very maximum entire sensor range, select Oxygen applications: In oxymay not be exceeded. 	ents are: process c ag device within the pressure): The MV e of +20 °C (+68 °F) pendence of MWP ues at higher temp materials 1.4435 a of the two material ard applies in each ard applies in each extions of the Techr nds to the overpress erature of +20 °C (+ irective (2014/68/ maximum working e and process conne- ler than the nomin um, to the OPL value a process connecti	onnection, optional mount e prescribed limits of the co VP is specified on the name and may be applied to the . For flanges, refer to the f eratures: EN 1092-1 (with and 1.4404 are grouped to ls can be identical.), ASME case). MWP data that dev case). MWP data that dev case of the process connection on with a higher OPL value	nted parts or omponents! eplate. This value refers e device for an unlimited ollowing standards for n regard to their stability gether under EN 1092-1 B 16.5a, JIS B 2220 (the iate from this are erall system. This value "PS". The abbreviation "P ng device. ssure limit (OPL) of the device is set at the on. If you want to use the e.

A

Mechanical construction

For the dimensions, see the Product Configurator: www.endress.com

Search for product \rightarrow click "Configuration" to the right of the product image \rightarrow after configuration click "CAD"

The following dimensions are rounded values. For this reason, they may deviate slightly from the dimensions given on www.endress.com.

Device height


The device height is calculated from

- the height of the housing
- the height of the relevant process connection.

The individual heights of the components can be found in the following sections. To calculate the device height, simply add up the individual heights of the components. If necessary, the installation space (the space used to install the device) must also be taken into account. You can use the following table for this:

Section	Page	Height
Housing height	→ 🗎 39	
Process connections	→ 🗎 41	
Installation distance	-	
Device height		


F31 housing, aluminum

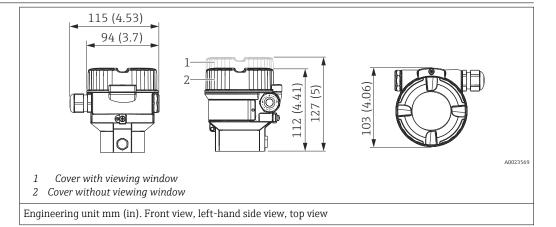

Material	Weight kg (lbs)	Option ¹⁾	
	With display	Without display	
Aluminium ²⁾	1.1 (2.43)	1.0 (2.21)	Ι
Aluminum with glass viewing window ²⁾			J

1) Product Configurator, "Housing" ordering feature


2) Degree of protection dependent on cable entry used $\rightarrow \triangleq 36$

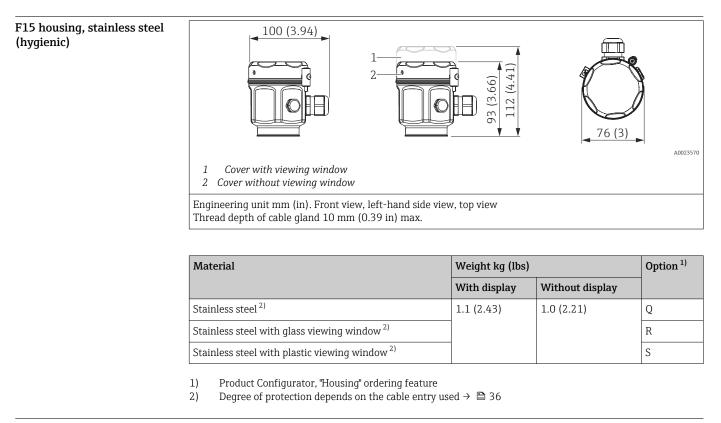

Diameter of the process 35.8 mm (1.41 in) membrane


Process connections FMB50, FMB51, FMB52


ISO 228 G and NPT threaded connection

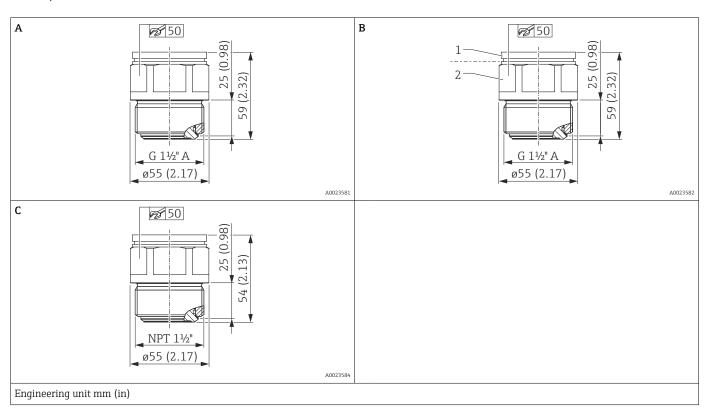

Item	Designation	Material	Weight	Approval	Option 1)
			kg (lb)		
А	Thread ISO 228 G 1 ½" A	AISI 316L (1.4435)	0,8 (1.76)	-	GGJ
В	Thread ISO 228 G 1 ½" A	1: top section AISI 316L (1.4435)2: bottom section Alloy C276 (2.4819)	0,8 (1.76)	-	GGC
С	Thread ANSI 1 ½" MNPT	AISI 316L (1.4435)	0,8 (1.76)	CRN	RGJ

1) Product Configurator, "Process connection" section




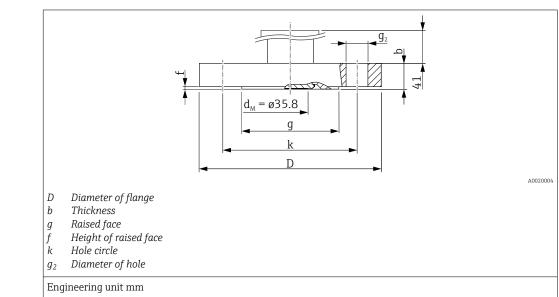

Flange ^{1) 2)}								Boltholes			Option ³⁾
Nominal diameter	Nominal pressure	Shape	D	b	g	f	Quantity	g ₂	k		
			[mm]	[mm]	[mm]	[mm]]	[mm]	[mm]	[kg (lb)]	
DN 40	PN 10/16	B1	150	18	88	2	4	18	110	3.05 (6.72)	CEJ
DN 50	PN 10/16	B1	165	18	102	2	4	18	125	3.75 (8.27)	CFJ
DN 80	PN 10/16	B1	200	20	138	2	8	18	160	5.55 (12.24)	CGJ
DN 100	PN 10/16	B1	220	20	158	2	8	18	180	6.75 (14.88)	СНЈ

1) The roughness of the surface in contact with the medium including the raised face of the flange (all standards) is $R_a 10$ to 12.5 μ m (394 to 492 μ in). Lower surface roughness available on request.

2) Material AISI 316L: Endress+Hauser supplies DIN/EN stainless steel flanges as per AISI 316L (DIN/EN material number 1.4404 or 14435). With regard to their stability-temperature property, the materials 1.4435 and 1.4404 are grouped together under 13EO in EN 1092-1: 2001 Tab. 18. The chemical composition of the two materials can be identical.

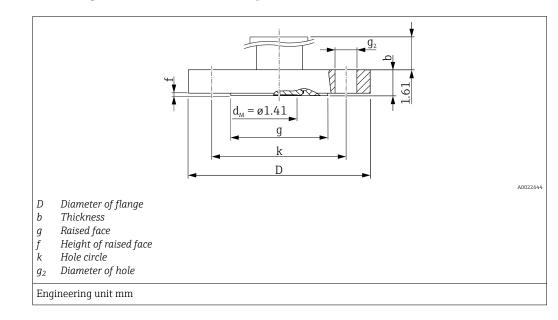


ASME flanges, connection dimensions as per ASME B 16.5, raised face RF

Flange ^{1) 2)}	Flange ^{1) 2)}								Weight	Approval	Option ³⁾
Nominal diameter	Class	D	b	g	f	Quantity	g ₂	k			
[in]	[lb./sq in]	[in]	[in]	[in]	[in]		[in]	[in]	[kg (lb)]]	
1 1/2	150	5	0.69	2.88	0.06	4	0.62	3.88	2.55 (5.62)	CRN	AEJ (not FMB51/52)
2	150	6	0.75	3.62	0.06	4	0.75	4.75	3.45 (7.61)	CRN	AFJ
3	150	7.5	0.94	5	0.06	4	0.75	6	6.15 (13.56)	CRN	AGJ
4	150	9	0.94	6.19	0.06	8	0.75	7.5	8.25 (18.19)	CRN	АНЈ

1) The roughness of the surface in contact with the medium including the raised face of the flange (all standards) is R_a 3.2 to 6.3 µm (125 to 250 µin). Lower surface roughness available on request.

2) Material AISI 316/316L: Combination of AISI 316 for required pressure resistance and AISI 316L for required chemical resistance (dual rated).

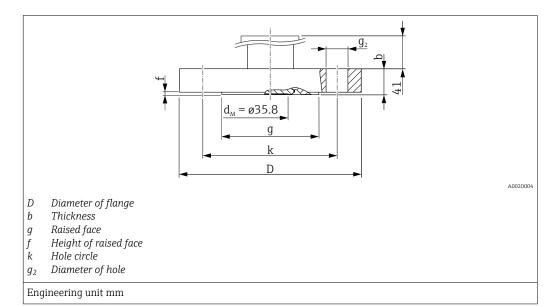

JIS flanges, connection dimensions as per JIS B 2220 BL, raised face RF


Flange ^{1) 2)}									Weight	Option ³⁾
Nominal diameter	Nominal pressure	D	b	g	f	Quantity	Quantity g ₂ k			
		[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[kg (lb)]	
40 A	10 K	140	16	81	2	4	19	105	2.55 (5.62)	KEJ
50 A	10 K	155	16	96	2	4	19	120	2.95 (6.50)	KFJ
80 A	10 K	185	18	126	2	8	19	150	4.25 (9.37)	KGJ
100 A	10 K	210	18	151	2	8	19	175	5.35 (11.79)	КНЈ

1) The roughness of the surface in contact with the medium including the raised face of the flange (all standards) is

 $R_a 3.2$ to 6.3 μm (125 to 250 μin). Lower surface roughness available on request.

2) Material AISI 316L (1.4435)

Process connections FMB50 Hygienic connections

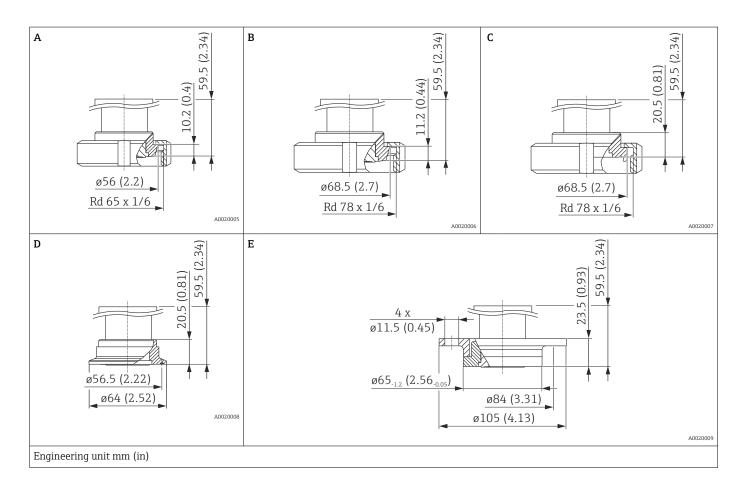


Item ¹⁾	Designation	Nominal pressure	Material	Weight	Approval	Option ²⁾
				kg (lb)		
A	DIN 11851 DN 40	PN 25	AISI 316L	0.7 (1.54)	EHEDG, 3A, CRN	MZJ ³⁾
В	DIN 11851 DN 50	PN 25	(1.4435)	0.9 (1.98)	EHEDG, 3A, CRN	MRJ ³⁾
С	DIN 11864-1 A DN 50 DIN 11866-A pipe, slotted nut, 316L	PN 16		1 (2.21)	EHEDG, 3A	NDJ ³⁾
D	Tri-Clamp ISO 2852 DN 40 – DN 51 (2"), DIN 32676 DN 50	-		0.7 (1.54)	EHEDG, 3A, CRN	TDJ
Е	DRD DN 50 (65 mm), slip-on flange AISI 304 (1.4301)	PN 25	1	1.1 (1.98)	-	TIJ

1) Roughness of the surface in contact with the medium is $R_a < 0.76 \mu m$ (30 μin) as standard. Lower surface roughness available on request.

2) Product Configurator, "Process connection" ordering feature

3) Endress+Hauser supplies these slotted nuts in stainless steel AISI 304 (DIN/EN material number 1.4301) or in AISI 304L (DIN/EN material number 1.4307).

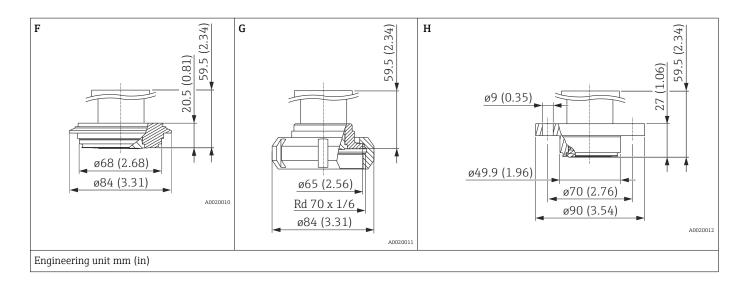


Item ¹⁾	Designation	Nominal pressure	Material	Weight	Approval	Option ²⁾
				kg (lb)		
F	Varivent type N for pipes 40 – 162	PN 40	AISI 316L		EHEDG, 3A, CRN	TRJ
G	SMS 2"	PN 25	(1.4435)	1 (2.21)	3A	TXJ ³⁾
Н	NEUMO, D50	PN 16		0.7 (1.54)	3A	S4J

1) Roughness of the surface in contact with the medium is $R_a < 0.76 \ \mu m$ (30 μ in) as standard. Lower surface roughness available on request.

Product Configurator, "Process connection" ordering feature

2) 3) Endress+Hauser supplies these slotted nuts in stainless steel AISI 304 (DIN/EN material number 1.4301) or in AISI 304L (DIN/EN material number 1.4307).

Universal process adapter

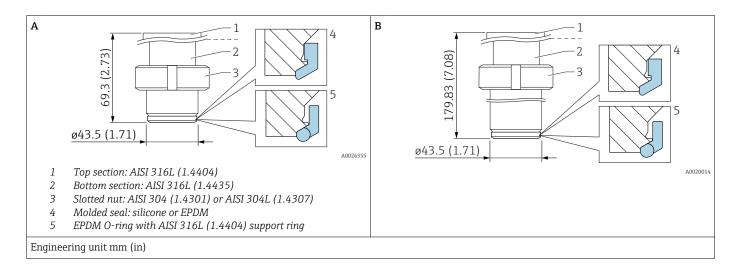

- Roughness of the surface in contact with the medium is $R_a < 0.76 \ \mu m$ (30 μin) as standard. Surface finish $R_a < 0.38 \ \mu m$ (15 μin) electropolished (wetted), ordering information: Product Configurator, "Service" ordering feature, option "HK"
- Silicone molded seal: FDA 21CFR177.2600/USP Class VI, order number: 52023572
- EPDM molded seal:
- FDA (177.2600), USP Class VI; 5 pcs, order number: 71100719 EPDM O-ring with AISI 316L (1.4404) support ring:
 - FDA (177.2600), USP Class VI; 1 pc, order number: 71431380

Item	Designation	Nominal pressure	Weight	Approval ¹⁾ . ²⁾	Option ³⁾
		bar (psi)	kg (lb)	-	
A	Universal process adapter Molded seal made of silicone (4)	10 (145)	0.8 (1.76)	CRN	UPJ
	Universal process adapter Molded seal made of EPDM (4)			-	URJ
	Universal process adapter EPDM O-ring with support ring (5) ⁴⁾			CRN	UNJ
В	Universal process adapter 6-inch extension Molded seal made of silicone (4)		1.7 (3.75)	CRN	UQJ
	Universal process adapter 6-inch extension EPDM O-ring with support ring (5) ⁴⁾	-		CRN	UOJ


1) CSA approval: Product Configurator, "Approval" ordering feature

2) See Product Configurator for additional approvals.

3) Product Configurator, "Process connection" ordering feature

4) With EHEDG approval.

Anderson process adapter

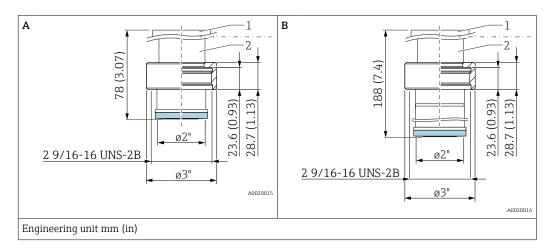


Item ¹⁾	Designation	Nominal pressure	Material	Weight	Approval	Option ²⁾
		bar (psi)		kg (lb)		
A	Anderson short process adapter 2-3/16", 316L, incl. silicone molded seal FDA 21CFR177.2600	3.5 (50)	 1: Top section AISI 316L (1.4404) 2: Bottom section AISI 316L (1.4435) Slotted nut AISI 316L (1.4404) 	1.5 (3.31)	3A	USJ
В	Anderson long process adapter 6-1/2", 316L, incl. silicone molded seal FDA 21CFR177.2600			2.9 (6.39)	3A	UTJ

1) Roughness of the surface in contact with the medium is $R_a < 0.76 \mu m$ (30 μin) as standard. Lower surface roughness available on request.


Process connections FMB51 (rod version)

Threaded connection ISO 228 and NPT

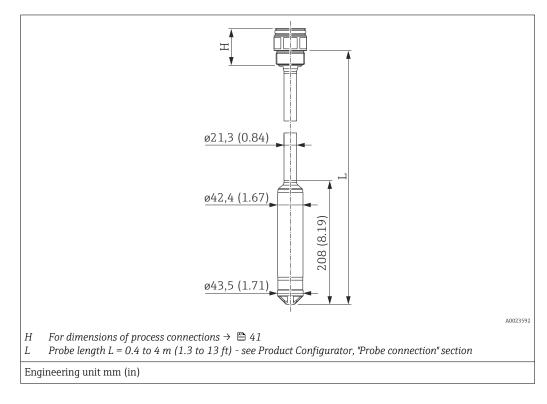

Process connection incl. sensor	Weight
Housing weight	→ 🗎 39
Process connection weight	→ 🖺 41
Pipe incl. cable	0.77 kg/m (1.70 lbs/3.3 ft)
Threaded connection incl. measuring cell tube and sensor	1.65 kg (3.64 lb)
Flange connection incl. measuring cell tube and sensor, without a flange	-
Total weight of device	


EN/DIN-, ANSI- and JIS flanges

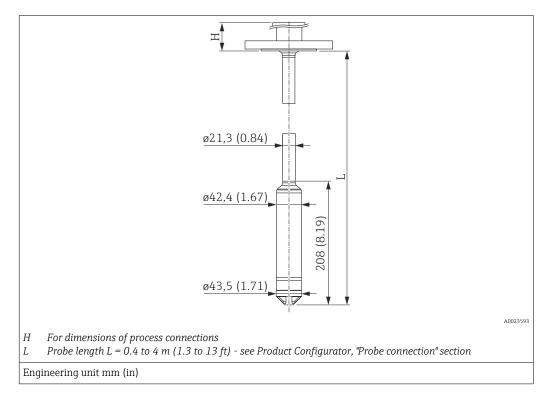

Process connection incl. sensor	Weight
Housing weight	→ 🗎 39
Process connection weight	→ 🖺 41
Pipe incl. cable	0.77 kg/m (1.70 lbs/3.3 ft)
Threaded connection incl. measuring cell tube and sensor	-
Flange connection incl. measuring cell tube and sensor, without a flange	1.30 kg (2.87 lb)
Total weight of device	

Process connections FMB52 (cable version)

Threaded connection ISO 228 and NPT

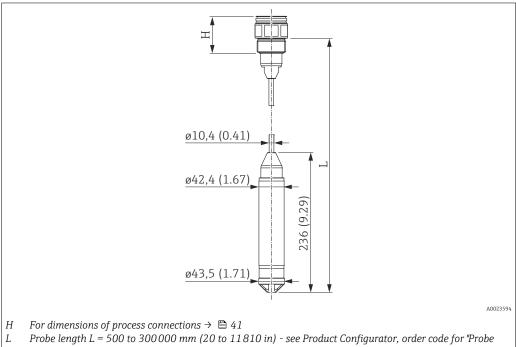


connection"

Engineering unit mm (in)


Process connection incl. sensor	Weight
Housing weight	→ 🖺 39
Process connection weight	→ 🖺 41
PE cable	0.13 kg/m (0.28 lbs/3.3 ft)
FEP cable	0.18 kg/m (0.40 lbs/3.3 ft)
Threaded connection incl. measuring cell tube and sensor	1.65 kg (3.64 lb)
Flange connection incl. measuring cell tube and sensor, without a flange	-
Total weight of device	

EN/DIN, ANSI and JIS flanges

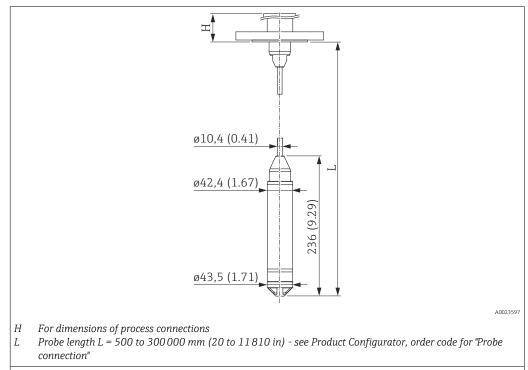

Engineering unit mm (in)


Process connection incl. sensor	Weight
Housing weight	→ 🖺 39
Process connection weight	→ 🖺 41
PE cable	0.13 kg/m (0.28 lbs/3.3 ft)
FEP cable	0.18 kg/m (0.40 lbs/3.3 ft)
Flange connection incl. measuring cell tube and sensor, without a flange	1.30 kg (2.87 lb)
Total weight of device	

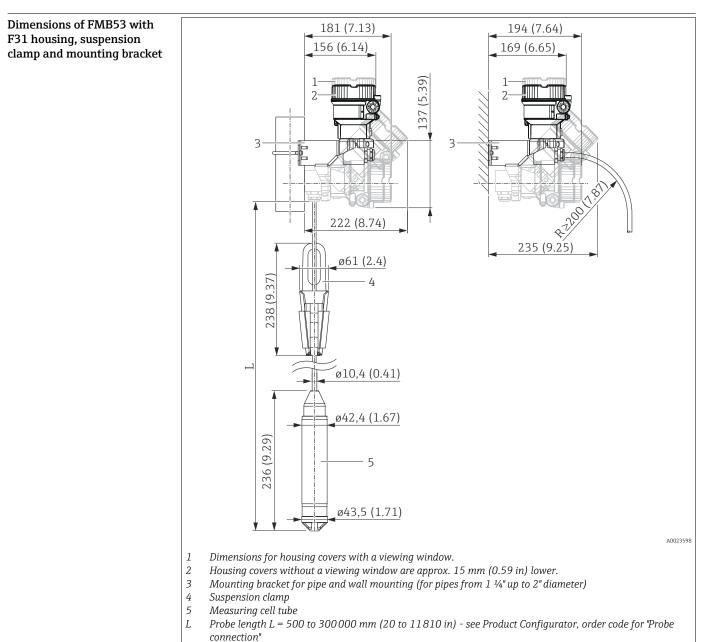

FMB53 with suspension clamp and mounting bracket (mounting bracket without marine approval) Engineering unit mm (in)


Process connection incl. sensor	Weight
Housing weight	→ 🗎 39
PE cable (cable length > 120 m (394 ft) = Delivery on cable reel)	0.13 kg/m (0.28 lbs/3.3 ft)
FEP cable (cable length > 120 m (394 ft) = Delivery on cable reel)	0.18 kg/m (0.40 lbs/3.3 ft)
Mounting bracket	0.2 kg (0.44 lb)
Pipe bend incl. cable entry	0.65 kg (1.43 lb)
Suspension clamp	0.4 kg (0.88 lb)
Measuring cell tube incl. sensor	1.0 kg (2.21 lb)
Total weight of device	

Dimensions of FMB53 with F15 housing, suspension clamp and mounting bracket

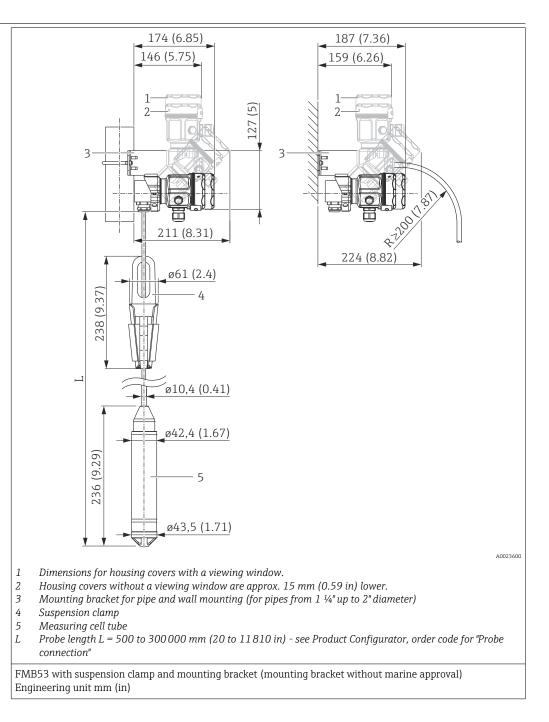

Process connection incl. sensor	Weight
Housing weight	→ 🖺 40
PE cable (cable length > 120 m (394 ft) = Delivery on cable reel)	0.13 kg/m (0.28 lbs/3.3 ft)
FEP cable (cable length > 120 m (394 ft) = Delivery on cable reel)	0.18 kg/m (0.40 lbs/3.3 ft)
Mounting bracket	0.2 kg (0.44 lb)
Pipe bend incl. cable entry	0.65 kg (1.43 lb)
Suspension clamp	0.4 kg (0.88 lb)
Measuring cell tube incl. sensor	1.0 kg (2.21 lb)
Total weight of device	

Wall and pipe mounting with mounting bracket

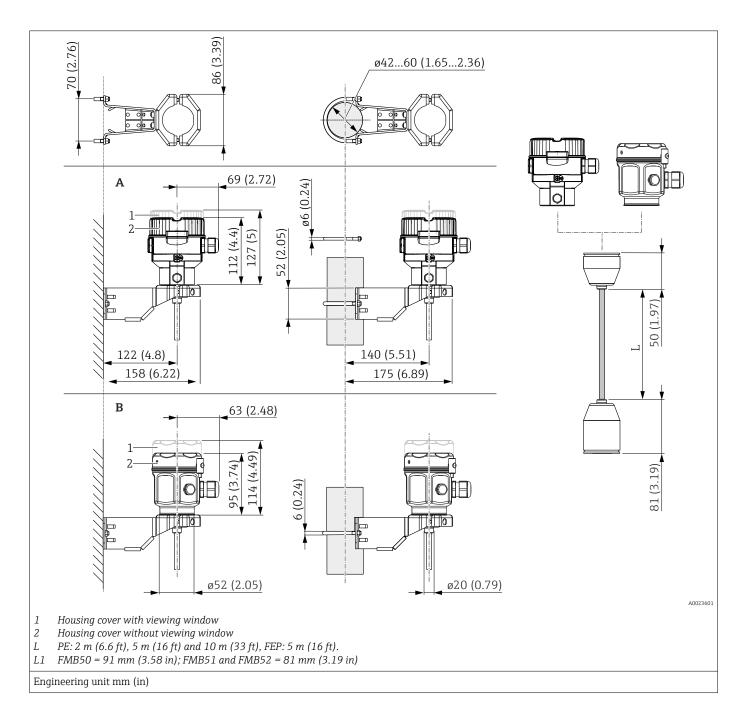


Item	Designation	Weight (kg (lb)		Option ¹⁾
		Housing (F31 or F15)	Mounting bracket	
А	Dimensions with F31 housing	→ 🗎 39	0.5 (1.10)	II
В	Dimensions with F15 housing		0.9 (1.10)	0

1) Product Configurator, "Separate housing" ordering feature

Also available for order as a separate accessory: Part number 71102216


FMB50: Reduction in installation height


If the separate housing is used, the mounting height of the process connection is reduced compared to the dimensions of the standard version.

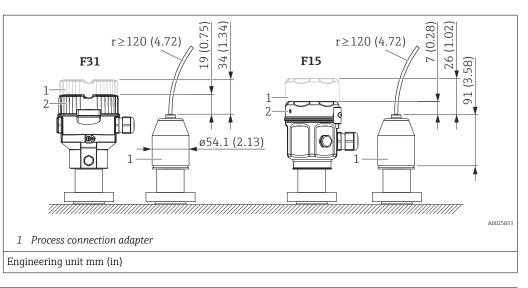

FMB51, FMB52: Reduction in installation height

If the separate housing is used, the mounting height of the process connection is reduced compared to the dimensions of the standard version.

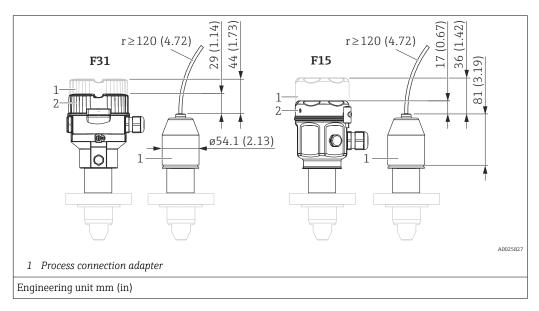

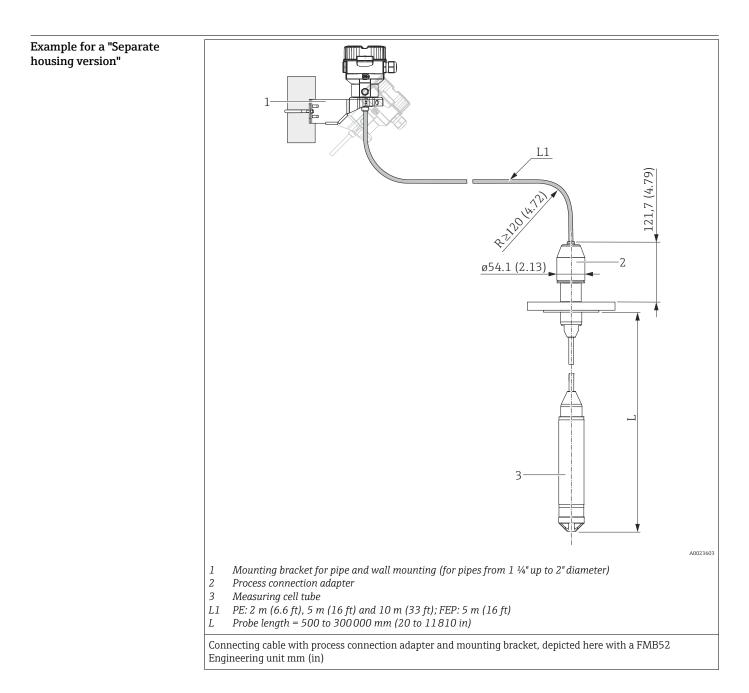


Process connection incl. sensor	Weight
Separate housing for FMB50	Weight of housing $\rightarrow \square$ 39 + 0.5 kg (1.10 lb)
Separate housing for FMB51 and FMB52	Weight of housing $\rightarrow \square$ 39 + 0.65 kg (1.43 lb)
Process connection adapter	0.4 kg (0.88 lb)
Mounting bracket	0.2 kg (0.44 lb)
Pipe bend incl. cable entry	0.65 kg (1.43 lb)
PE cable 2 m (6.6 ft)	0.16 kg (0.35 lb)
PE cable 5 m (16 ft)	0.32 kg (0.71 lb)
Total weight of device	




Ordering information for FMB50, FMB51, FMB52: Product Configurator, order code for "Separate housing".

Materials not in contact with F31 housing process

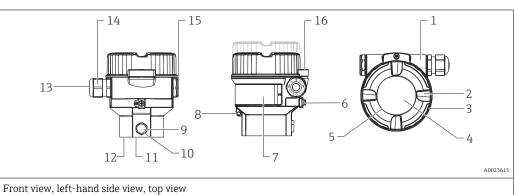

Item number	Component part	Material
1	F31 housing, RAL 5012 (blue)	Die-cast aluminum with protective powder-coating on polyester base
2	Cover, RAL 7035 (gray)	Die-cast aluminum with protective powder-coating on polyester base
3	Cover seal	EPDM
4	Sight glass	Mineral glass
5	Sight glass seal	Silicone (VMQ)
6	External ground terminal	AISI 304 (1.4301)
7	Nameplates	Plastic film
8	Fastening for wired-on tag plate	AISI 304 (1.4301)/AISI 316 (1.4401)
9	Pressure compensation filter	AISI 316L (1.4404) and PBT-FR
10	Pressure compensation filter, O-ring	VMQ or EPDM
11	Sealing ring	EPDM
12	Snap ring	PC Plastic
13	Seal of cable gland and blind plug	EPDM/NBR
14	Cable gland	Polyamide (PA), for dust ignition-proof: CuZn nickel- plated
15	Blind plug	PBT-GF30 FR
		for dust ignition-proof, Ex d, FM XP and CSA XP: AISI 316L (1.4435)
16	Cover clamp	Clamp AISI 316L (1.4435), screw A4


F15 housing

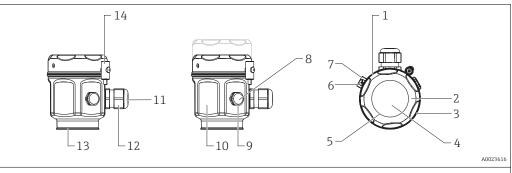

Front view, left-hand side view, top view

Item number	Component part	Material
1	F15 housing	AISI 316L (1.4404)
2	Cover	
3	Cover seal	Silicone with PTFE coating
4	Sight glass for non-hazardous area, ATEX Ex ia, NEPSI Zone 0/1 Ex ia, IECEx Zone 0/1 Ex ia, FM NI, FM IS, CSA IS	Polycarbonate (PC)
4	Sight glass for ATEX 1/2 D, ATEX 1/3 D, ATEX 1 GD, ATEX 1/2 GD, ATEX 3 G, FM DIP, CSA dust ignition- proof	Mineral glass
5	Sight glass seal	Silicone (VMQ)
6	External ground terminal	AISI 304 (1.4301)
7	Fastening for wired-on tag plate	AISI 304 (1.4301)/AISI 316 (1.4401)
8	Pressure compensation filter	AISI 316L (1.4404) and PBT-FR
9	Pressure compensation filter, O-ring	VMQ or EPDM
10	Nameplates	Lasered on
11	Cable gland	Polyamide (PA), for dust ignition- proof: CuZn nickel-plated
12	Seal of cable gland and blind plug	NBR/Silicone/EPDM
13	Sealing ring	EPDM
14	Screw	A4-50

Connecting parts

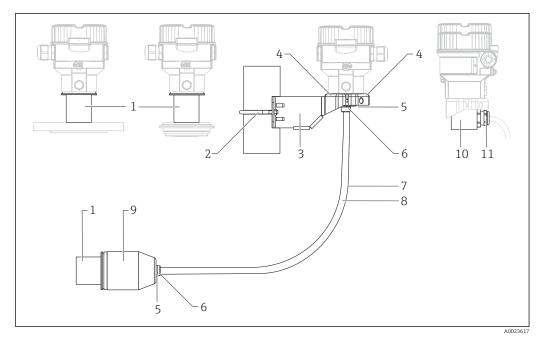

Item number	Component part	Material
1	Connection between the housing and process connection	AISI 316L (1.4404)
2	Mounting bracket	Bracket AISI 316L (1.4404)
3		Screw and nuts A4-70
4		Half-shells: AISI 316L (1.4404)
5	Seal for cable from separate housing	FKM, EPDM
6	Gland for cable from separate housing:Screws:	AISI 316L (1.4404)A2
7	PE cable for separate housing	Abrasion-proof cable with strain-relief Dynema members; shielded using aluminum-coated film; insulated with polyethylene (PE-LD), black; copper wires, twisted, UV-resistant
8	FEP cable for separate housing	Abrasion-proof cable; shielded using galvanized steel wire netting; insulated with fluorinated ethylene propylene (FEP), black; copper wires, twisted, UV- resistant
9	Process connection adapter for separate housing	AISI 316L (1.4404)
10	Housing adapter	FMB50, FMB51, FMB52: AISI 316L (1.4404) FMB53: AISI 304 (1.4301)
11	Cable gland: Sealing insert: O-ring:	CuZn nickel-plated TPE-V NBR

Fill fluid


Designation	Option ¹⁾
Inert oil	2
Synthetic oil polyalphaolefin FDA 21 CFR 178.3620, NSF H1	3

1) Product Configurator, order code for "Fill fluid"

Materials in contact with process

NOTICE

Device components in contact with the process are listed in the "Mechanical construction"
 →
 ⁽¹⁾
 ⁽²⁾
 ⁽²⁾

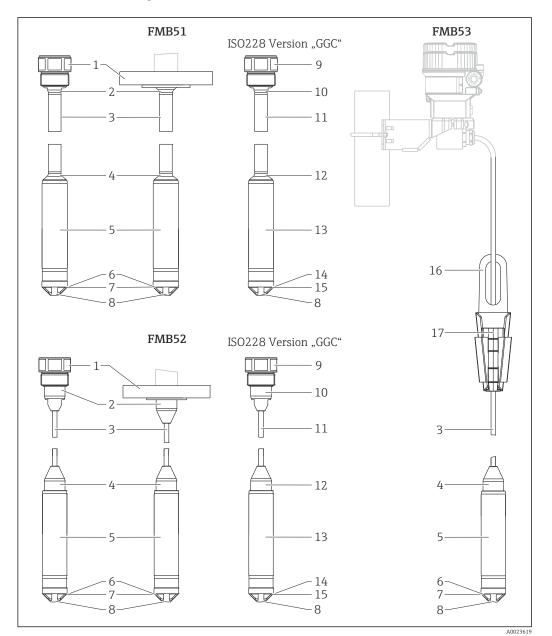

Item number	Component	Material
1	Process connection	→ 🗎 41
2	Socket	AISI 316L (1.4404)
3	Rod	AISI 316L (1.4404)

Item number	Component	Material
	PE cable	Abrasion-proof cable; shielded using galvanized steel wire netting and aluminum-coated film; insulated with polyethylene (PE-LD), black/blue; copper wires, twisted, UV- resistant
	PE cable (Usage in drinking water)	Abrasion-proof cable; shielded using galvanized steel wire netting and aluminum-coated film; insulated with polyethylene (PE-LD), black; copper wires, twisted, UV- resistant
3	FEP cable	Abrasion-proof cable; shielded using galvanized steel wire netting and aluminum-coated film; insulated with fluorinated ethylene propylene (FEP), black; copper wires, twisted, UV- resistant
4	Socket	AISI 316L (1.4404)
5	Probe tube	AISI 316L (1.4404)
6	Process membrane and meter body	→ 🗎 62
7	Seals	→ 🗎 63
8	Protection cap	РОМ
9	Process connection	Alloy C276 (2.4819)
10	Socket	Alloy C4 (2.4610)
11	Rod	Alloy C4 (2.4610)
12	Socket	Alloy C4 (2.4610)
13	Probe tube	Alloy C22 (2.4602)
14	Process membrane and meter body	→ 🗎 62
15	Seals	→ 🗎 63
16	Suspension clamp	AISI 316L (1.4404)
17	Clamping jaw	PA-GF

DIN/EN flanges

Endress+Hauser supplies DIN/EN flanges made of stainless steel AISI 316L as per material numbers 1.4435 or 1.4404. With regard to their stability-temperature property, the materials 1.4435 and 1.4404 are grouped together under 13EO in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.

Process membrane

Process membrane	Coating	Meter body	FMB50	FMB51	FMB52	Option ¹⁾
Alloy C276 (2.4819)	-	316L (1.4435) or Alloy C276 (2.4819) ²⁾	r	r	r	В
Alloy C276 (2.4819)	Gold-rhodium	Alloy C276 (2.4819)	r	r	r	L
Alloy C276 (2.4819)	Gold-platinum	Alloy C276 (2.4819)	_	r	V	N

1) Product Configurator, "Material of the process membrane" ordering feature

2) The material of the meter body corresponds to the material of the selected process connection.

Process membrane	Coating	Meter body	FMB53	Option ¹⁾
Alloy C276 (2.4819)	-	316L (1.4435)	V	В
Alloy C276 (2.4819)	Gold-rhodium	Alloy C276 (2.4819)	V	L
Alloy C276 (2.4819)	Gold-platinum	Alloy C276 (2.4819)	V	Ν

1) Product Configurator, "Material of the process membrane" ordering feature

Seals

Designation	Option 1)
FKM Viton	A ²⁾
EPDM	J ²⁾
Kalrez 6375	L ²⁾
None, welded cell	U

1) Product Configurator, "Seal" ordering feature

2) Not FMB50

TSE Certificate of Suitability (Transmissible Spongiform Encephalopathy)

The following applies to all device components in contact with the process:

- They do not contain any materials derived from animals.
- No additives or operating materials derived from animals are used in production or processing.

	Operability				
Operating concept	Operator-oriented menu structure for user-specific tasks				
	 Commissioning Operation Diagnostics Expert level 				
	Quick and safe commissioning				
	Guided menus for applications				
	Reliable operation				
	 Onsite operation possible in several languages Standardized operation at the device and in the operating tools Parameters can be locked/unlocked using the device's write protection switch (not IO-Link), using the device software or via remote control 				
	Efficient diagnostics increase measurement reliability				
	 Remedial measures are integrated in plain text Diverse simulation options 				
Onsite operation	Onsite display (optional)				
	A 4-line liquid crystal display (LCD) is used for display and operation. The onsite display shows measured values, dialog text as well as fault and notice messages in plain text, thereby supporting the user in every stage of operation. The liquid crystal display of the device can be turned in 90° stages. Depending on the orientation of the device, this makes it easy to operate the device and rea the measured values.				
	 Functions: 8-digit measured value display incl. sign and decimal point in relation to the set pressure range. Bar graph for 4 to 20 mA HART as current display Bar graph for IO-Link as current display Bar graph for PROFIBUS PA as graphic display of the standardized value of the AI block Bar graph for FOUNDATION Fieldbus as graphic display of the transducer output Simple and complete menu guidance as parameters are split into several levels and groups Each parameter is given a 3-digit ID number for easy navigation Option for configuring the display of other measured values such as sensor temperature, contrast setting Comprehensive diagnostic functions (fault and warning message, peak-hold indicators, etc.) 				
	$4 \times \times \times \times \times \times 679 5$				

+ E

- |

Operating keys

Parameter ID number

Bar graph

Symbol

Header

1 2

3

4

5

2

1

A0016498

Ordering information: Product Configurator, "Output, Operation" ordering feature

Function		Operation via display				
	HART	IO-Link	PROFIBUS PA	FOUNDATION Fieldbus		
Position adjustment (zero point correction)	V	r	V	٧		
Setting lower range value and upper range value - reference pressure present at the device	r	V	V	V		
Device reset	V	r	V	V		
Locking and unlocking parameters relevant to the measured value	V	r	V	<i>٧</i>		
Switching damping on and off	V	r	V	V		


Operating keys and elements located internally on the electronic insert

Function	Operation with operating keys and elements on the electronic insert				
	HART	IO-Link	PROFIBUS PA	FOUNDATION Fieldbus	
Position adjustment (zero point correction)	V	r	V	V	
Setting lower range value and upper range value - reference pressure present at the device	V	V	_	-	
Device reset	v	r	V	V	
Locking and unlocking parameters relevant to the measured value	v	_	V	V	
Value acceptance indicated by the green LED	v	r	V	V	
Switching damping on and off	r	_	V	<i>v</i>	

Ordering information:

Product Configurator, "Output, Operation" ordering feature


HART

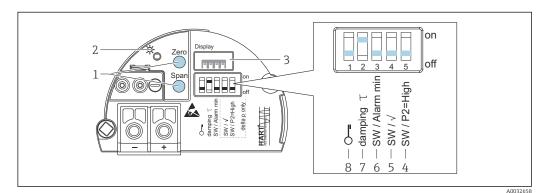

1 Operating keys for lower range value (zero) and upper range value (span)


- 2 Green LED to indicate successful operation
- 3 Slot for optional local display
- 4 DIP switch only for Deltabar M
- 5 DIP switch only for Deltabar M
- 6 DIP switch for alarm current SW / Alarm Min (3.6 mA)
- 7 DIP switch for switching damping on/off
- 8 DIP switch for locking/unlocking parameters relevant to the measured value

IO-Link

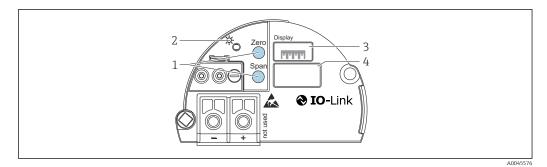


- 1 *Operating keys for lower range value (zero) and upper range value (span)*
- 2 Green LED to indicate successful operation
- Slot for optional onsite display 3
- Slot for M12 plug 4

PROFIBUS PA

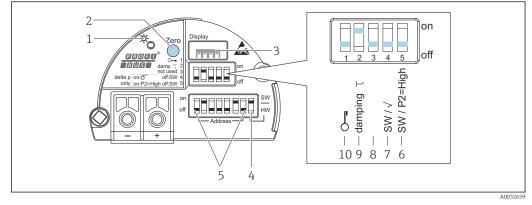

- 1 Green LED to indicate successful operation
- Operating key for position zero adjustment (Zero) or reset 2
- 3
- Slot for optional local display DIP-switch for bus address SW / HW 4
- DIP-switch for hardware address DIP switch only for Deltabar M 5
- 6
- 7 DIP switch only for Deltabar M
- 8 Not used
- 9 DIP switch for switching damping on/off
- 10 DIP switch for locking/unlocking parameters relevant to the measured value

FOUNDATION Fieldbus

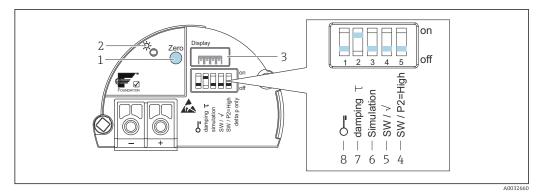

- 1 Operating key for position zero adjustment (Zero) or reset
- 2 Green LED to indicate successful operation
- *3* Slot for optional local display
- 4 DIP switch only for Deltabar M
- 5 DIP switch only for Deltabar M
- 6 DIP-switch for simulation mode
- 7 DIP switch for switching damping on/off
- 8 DIP switch for locking/unlocking parameters relevant to the measured value

Operating languages

You can also choose another language in addition to the standard language "English":

Designation	Option ¹⁾
English	АА
German	AB
French	AC
Spanish	AD
Italian	AE
Dutch	AF
Chinese	AK
Japanese	AL

1) Product Configurator "Additional Operation Language" ordering feature

Remote operation

Depending on the position of the write protection switch on the device, all software parameters are accessible.

Hardware and software for remote operation	HART	IO-Link	PROFIBUS PA	FOUNDATION Fieldbus
FieldCare $\rightarrow \square 67$	✓ ¹⁾	✓ ²⁾	✓ ³⁾	V
FieldXpert SFX100 → $$ 68	r	-	_	V
NI-FBUS Configurator $\rightarrow \textcircled{B} 68$	_	_	_	V
Field Xpert SMT70, SMT77→ 🗎 68	1)	✓ ²⁾	_	V

1) Commubox FXA195 required

2) SFP20 required

3) Profiboard or Proficard required

FieldCare

FieldCare is an Endress+Hauser asset management tool based on FDT technology. With FieldCare, you can configure all Endress+Hauser devices as well as devices from other manufacturers that support the FDT standard.

FieldCare supports the following functions:

- Configuration of transmitters in offline and online mode
- Loading and saving device data (upload/download)
- Documentation of the measuring point

Connection options:

- HART via Commubox FXA195 and the USB port on a computer
- IO-Link with FieldPort SFP20 and the USB interface of a computer and IO-Link IODD Interpreter DTM
- PROFIBUS PA via segment coupler and PROFIBUS interface card

For further information please contact your local Endress+Hauser Sales Center.

Field Xpert SFX100

Field Xpert is an industrial PDA with integrated 3.5" touchscreen from Endress+Hauser based on Windows Mobile. It offers wireless communication via the optional VIATOR Bluetooth modem from Endress+Hauser. Field Xpert also works as a stand-alone device for asset management applications. For details refer to BA00060S/04/DE.

Field Xpert SMT70, SMT77

The Field Xpert SMT70 tablet PC for device configuration enables mobile plant asset management in hazardous (Ex Zone 2) and non-hazardous areas. It is suitable for commissioning and maintenance staff. It manages Endress+Hauser and third-party field instruments with a digital communication interface and documents the progress of the work. The SMT70 is designed as a complete solution. It comes with a pre-installed driver library and is an easy-to-use, touch-enabled tool for managing field devices throughout their entire life cycle.

The Field Xpert SMT77 for device configuration enables mobile plant asset management in areas categorized as Ex Zone 1. It is suitable for commissioning and maintenance staff for easy management of field instruments with a digital communication interface. The touch-enabled tablet PC is designed as a complete solution. It comes with comprehensive pre-installed driver libraries and offers users a modern software user interface to manage field instruments throughout the entire life cycle.

Required tool: "IO-Link IODD Interpreter DTM"

FieldPort SFP20

The FieldPort SFP20 is a USB interface for the configuration of Endress+Hauser IO-Link devices, and also of devices from other vendors. Combined with the IO-Link CommDTM and the IODD Interpreter, the FieldPort SFP20 complies with the FDT/DTM standards.

Commubox FXA195

For intrinsically safe HART communication with FieldCare via the USB interface. For details refer to TI00404F/00/EN.

Profiboard

For connecting a PC to PROFIBUS.

Proficard

For connecting a laptop to PROFIBUS.

FF configuration program

FF configuration program, such as NI-FBUS Configurator, to

- connect devices with "FOUNDATION Fieldbus signal" to an FF-network
- set FF-specific parameters

Remote operation via NI-FBUS Configurator:

The NI-FBUS Configurator is an easy-to-use graphical environment for creating linkages, field-based control loops and a schedule based on the FOUNDATION Fieldbus concept.

You can use the NI-FBUS Configurator to configure a fieldbus network as follows:

- Set function block and device tags
- Set device addresses
- Create and edit field-based control systems and control loops

- Configure sensor-specific parameters
- Create and edit schedules
- Read and write to control systems and control loops
- Execute methods that are listed in the manufacturer-specific device description (DD) (e.g., device basic settings)
- Display DD menus (e.g., tab for calibration data)
- Save the device and network configuration
- Verify a configuration and compare it to a saved configuration
- Monitor a saved configuration
- Replace a virtual device by a real device
- Save and print a configuration

System integration

The device can be given a tag name (max. 8 alphanumeric characters).

Designation	Option ¹⁾
Measuring point (TAG), see additional spec.	Z1
Bus address, see additional spec.	Z2

1) Product Configurator, "Identification" ordering feature

IO-Link Smart Sensor Profile 2nd Edition

- Supports
- Identification
- Diagnosis
- Digital Measuring Sensor (as per SSP 4.3.3)

IO-Link (optional)

Operating concept for devices with IO-Link

- Operator-oriented menu structure for user-specific tasks
- Quick and safe commissioning

Efficient diagnostics increase measurement reliability

- Remedial measures
- Simulation options

IO-Link information

IO-Link is a point-to-point connection for communication between the measuring device and an IO-Link master. The measuring device features an IO-Link communication interface type 2 (pin 4) with a second IO function on pin 2. This requires an IO-Link-compatible assembly (IO-Link master) for operation. The IO-Link communication interface enables direct access to the process and diagnostic data. It also provides the option of configuring the measuring device while in operation.

Characteristics of the IO-Link interface:

- IO-Link specification: Version 1.1
- IO-Link Smart Sensor Profile 2nd Edition
- Speed: COM2; 38.4 kBaud
- Minimum cycle time: 10 ms
- Process data width: 14 Byte
- IO-Link data storage: Yes
- Block configuration: Yes
- Device operational: The measuring device is operational 5 seconds after the supply voltage is applied

IO-Link download

http://www.endress.com/download

- Select "Software" as the media type
- Select "Device Driver" as the software type Select IO-Link (IODD)
 IODD for Deltarily FMDE 0
- IODD for Deltapilot FMB50
- In the "Text Search" field enter the device name.

https://ioddfinder.io-link.com/ Search by

- Manufacturer
- Article number
- Product type

Device Search (IO-Link)

The Device Search parameter is used to uniquely identify the device during installation.

Certificates and approvals

CE mark	The device meets the legal requirements of the relevant EC directives. Endress+Hauser confirms that the device has been successfully tested by applying the CE mark.
RoHS	The measuring system complies with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS 2).
RCM marking	The supplied product or measuring system meets the ACMA (Australian Communications and Media Authority) requirements for network integrity, interoperability, performance characteristics as well as health and safety regulations. Here, especially the regulatory arrangements for electromagnetic compatibility are met. The products bear the RCM marking on the nameplate.
	A0029561
Ex approvals	 ATEX IECEx FM CSA NEPSI
	 Combinations of different approvals also All explosion protection data are given in separate documentation which is available upon request. The Ex documentation is supplied as standard with all Ex devices .
EAC conformity	The measuring system meets the legal requirements of the applicable EAC guidelines. These are listed in the corresponding EAC Declaration of Conformity together with the standards applied.
	The manufacturer confirms successful testing of the device by affixing to it the EAC mark.
Suitable for hygiene	For information on installation and approvals, see documentation SD02503F "Hygiene approvals".
applications	For information on 3-A and EHEDG-tested adapters, see documentation TI00426F "Weld-in adapter, process adapter and flanges".
Certificate of current Good	Product Configurator, order code for "Test, Certificate" option "JG"
Manufacturing Practices (cGMP)	 The certificate is only available in English Materials of construction of product wetted parts TSE compliance
	 Polishing and surface finish Material/ compound compliance table (USP Class VI, FDA conformity)
Certificate of Compliance	Ordering information:
ASME BPE 2012 (only FMB50)	Product Configurator, "Additional approval" ordering feature, option "LW"
Functional safety SIL	The Deltapilot M with 4 to 20 mA output signal has been developed to assessed and certified by TÜV NORD CERT as per IEC 61508 Edition 2.0 and IEC 61511. These devices can be used to monitor the process level and pressure up to SIL 2. For a detailed description of the safety functions with Deltapilot M, settings and functional safety data, see the "Functional safety manual - Deltapilot M" SD00347P.
	Ordering information:
	Product Configurator, "Additional approval" ordering feature, option "LA"
CRN approval	Some device versions have CRN approval. A CRN-approved process connection with a CSA approval must be ordered for a CRN-approved device. These devices are fitted with a separate plate bearing the registration number 0F14101.5.

	Ordering information:
	Product Configurator, "Process connection" ordering feature and
	Product Configurator, "Approval" ordering feature
Overfill protection	WHG (FMB50, FMB51, FMB52): see document ZE00275P
	Ordering information:
	Product Configurator, "Additional approval" ordering feature, option "LC".
Other standards and guidelines	The applicable European guidelines and standards can be found in the relevant EU Declarations of Conformity. The following standards were also applied:
	IEC 62828-1 and IEC 62828-2:
	Transmitters for use in industrial-process control systems. Part 1: Methods for performance evaluation
	DIN 16086:
	Electrical pressure measuring instruments, pressure sensors, pressure transmitters, pressure measuring instruments, concepts, specifications in data sheets
	EN 61326 series:
	EMC product family standard for electrical equipment for measurement, control, regulation and laboratory procedures.
	EN 60529:
	Degrees of protection provided by enclosures (IP code)
AD2000	The pressure retaining material 316L (1.4435/1.4404) corresponds to AD2000 - W2/W10.
Pressure Equipment Directive 2014/68/EU (PED)	Pressure equipment with allowable pressure ≤ 200 bar (2900 psi)
	Pressure equipment (with a maximum allowable pressure PS \leq 200 bar (2 900 psi)) can be classified as pressure accessories in accordance with Pressure Equipment Directive 2014/68/EU. If the maximum allowable pressure is \leq 200 bar (2 900 psi) and the pressurized volume of the pressure equipment is \leq 0.1 l, the pressure equipment is subject to the Pressure Equipment Directive (cf. Pressure Equipment Directive 2014/68/EU, Article 4, point 3). The Pressure Equipment Directive only requires that the pressure equipment shall be designed and manufactured in accordance with the "sound engineering practice of a Member State".
	Reasons:
	 Pressure Equipment Directive (PED) 2014/68/EU Article 4, point 3 Pressure equipment directive 2014/68/EU, Commission's Working Group "Pressure", Guideline A-05 + A-06
	Note:
	A partial examination shall be performed for pressure instruments that are part of safety equipment for the protection of a pipe or vessel from exceeding allowable limits (safety accessory in accordance with Pressure Equipment Directive 2014/68/EU, Article 2, point 4).
Manufacturer declaration	Depending on the desired configuration, the following documents can be ordered additionally with the device:
	 TSE-free, materials free from animal origin Regulation (EC) No. 2023/2006 (GMP)
	 Regulation (EC) No. 1935/2004 on materials and articles intended to come into contact with food
	Downloading the Declaration of Conformity
	www.endress.com \rightarrow Download

Marine approval	Designation	FMB50	FMB51	FMB52	FMB53	Option ¹⁾
	GL	V	-	V	V	LE
	ABS	V	-	V	V	LF
	LR	V	-	V	V	LG
	BV	V	-	V	V	LH
	DNV	~	_	V	v	LI

Product Configurator, "Additional options 1" and "Additional options 2" ordering feature 1)

Drinking water approval	Designation				Option ¹⁾		
	KTW		L	LQ			
	NSF61		L	.R			
	ACS (under development)		L	S			
	1) Product Configurator, "Additional options 1" and "Additio	nal options	s 2" orderi	ng feature	5		
Classification of process sealing between electrical systems and (flammable or combustible) process fluids in accordance with ANSI/ ISA 12.27.01	Endress+Hauser instruments are designed according to ANSI/ISA 12.27.01 either as single seal or dual seal devices with annunciation, allowing the user to waive the use and save the cost of installing external secondary process seals in the conduit as required by the process sealing sections of ANSI/ NFPA 70 (NEC) and CSA 22.1 (CEC). These instruments comply with the North-American installation practice and provide a very safe and cost-saving installation for pressurized applications with hazardous fluids.						
	Further information can be found in the control drawings of the relevant						
Inspection certificate	Designation	FMB50	FMB51	FMB52	FMB53	Option ¹	
	3.1 Material certificate, wetted metallic parts, EN10204-3.1 inspection certificate	V	r	V	V	JA ²⁾	
	Conformity to NACE MR0175, wetted metallic parts	V	V	V	~	JB ²⁾	
	Conformity to NACE MR0103, wetted metallic parts	~	~	~	V	JE 2)	
	Conformity to NACE MR0103, wetted metallic parts Conformity to AD2000, wetted metallic parts, excepting process membrane	v v	-	-	 - 	JE ²⁾ JF	
	Conformity to AD2000, wetted metallic parts, excepting	-		 - - 	-	5	
	Conformity to AD2000, wetted metallic parts, excepting process membrane Surface finish measurement ISO4287/Ra, wetted metallic	V	-	 	-	JF	
	Conformity to AD2000, wetted metallic parts, excepting process membrane Surface finish measurement ISO4287/Ra, wetted metallic parts, Inspection certificate	V V	-	-	-	JF KB	
	Conformity to AD2000, wetted metallic parts, excepting process membrane Surface finish measurement ISO4287/Ra, wetted metallic parts, Inspection certificate Helium leak test, internal procedure, inspection certificate		- - V	- - v	- - V	JF KB KD	

1)

Product Configurator, "Test, certificate" ordering feature The selection of this feature for coated process isolating diaphragm / process connections refers to the 2) metallic base material.

Calibration; unit

Designation	Option ¹⁾
Sensor range; %	А
Sensor range; mbar/bar	В
Sensor range; kPa/MPa	С
Sensor range; mm/mH2O	D
Sensor range; inH2O/ftH2O	Е

Designation	Option ¹⁾
Sensor range; psi	F
Customized pressure; see additional specification	J
Customized level; see additional specification	К

1) Product Configurator, "Calibration; unit" ordering feature

Calibration

Designation	Option ¹⁾
Factory calib. certificate 5-point	F1
DKD/DAkkS calib. certificate 10-point ²⁾	F2

Product Configurator "Calibration" ordering feature Only for FMB50 1)

2)

Service

Designation	Option ¹⁾
Cleaned from oil+grease ²⁾	HA
Cleaned for oxygen service ²⁾	HB
Cleaned from PWIS (PWIS = paint wetting impairment substances) ²⁾	НС
Adjusted min alarm current	IA
Adjusted HART Burst Mode PV	IB

Product Configurator "Service" ordering feature 1)

2) Only device, not accessory or enclosed accessory

Ordering information

Detailed ordering information is available as follows:

- In the Product Configurator on the Endress+Hauser website:www.endress.com → Click "Corporate" → Select your country → Click "Products" → Select the product using the filters and search field → Open product page → The "Configure" button to the right of the product image opens the Product Configurator.
- From your Endress+Hauser Sales Center:www.addresses.endress.com
 - Product Configurator the tool for individual product configuration
- Up-to-the-minute configuration data
 - Depending on the device: direct input of information specific to the measuring point, such as measuring range or operating language
 - Automatic verification of exclusion criteria
 - Automatic generation of the order code with its breakdown in PDF or Excel output format
 - Ability to order directly in the Endress+Hauser Online Shop

Special device versions Endress+Hauser offers special device versions as **T**echnical **S**pecial **P**roducts (TSP).

For further information please contact your local Endress+Hauser Sales Center.

Scope of delivery	 Device
	 Optional accessories
	Brief Operating Instru

- Brief Operating Instruction
- Calibration certificates
- Optional certificates

Measuring point (TAG)	Order code for	895: Marking
	Option	Z1: Tagging (TAG), see additional spec.
	Location of measuring point identification	To be selected in the additional specification: Tie-on label, stainless steel Adhesive paper label Label provided RFID TAG RFID TAG + tie-on label, stainless steel RFID TAG + adhesive paper label RFID TAG + label provided
	Definition of measuring point identification	To be specified in additional specification: 3 lines each with a maximum of 18 characters The measuring point designation appears on the selected label and/or the RFID TAG.
	Identification on electronic nameplate (ENP)	32 characters
	Identification on display module	10 characters

Configuration data sheet

[] I(

IO-Link: The following data can only be selected for cyclic data and not for acyclic data.

Pressure

If the option "J" was selected for the order code for "Calibration; Unit" in the Product Configurator, the following configuration data sheet must be completed and included with the order.

Pressure unit				
□ mbar □ bar □ psi	$ \begin{array}{c c} mmH_2O\\ mH_2O\\ ftH_2O\\ nH_2O\\ mH_2O\\ \end{array} $	 mmHg kgf/cm² 	□ Pa □ kPa □ MPa	

Calibration Range / Output		
Low range value (LRV): Upper range value (URV):	 [Pressure engineering unit] [Pressure engineering unit]	

Display	
1st Value Display ¹⁾	2nd Value Display ¹⁾
C	 None (Default) Main Value [%] Pressure Current [mA] (HART only) Temperature


1) Depending on sensor and communication version

Damping		
Damping:	 sec (Default 2 sec)	

Lowest calibratable span (preset at factory) $\rightarrow \implies 14$

Level

If the option "K" was selected for the order code for "Calibration; Unit" in the Product Configurator, the following configuration data sheet must be completed and included with the order.

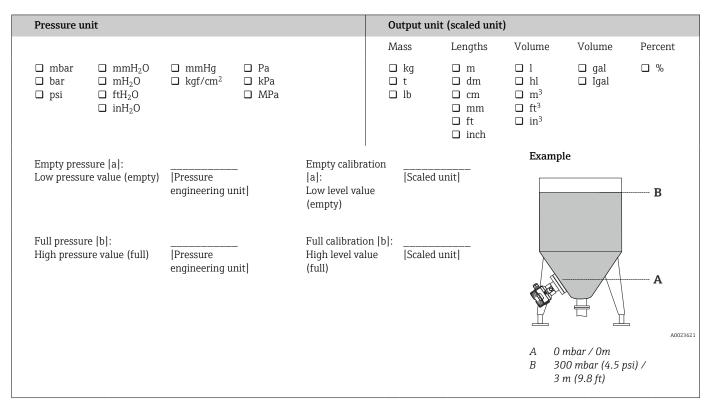

Display	
1st Value Display ¹⁾	2nd Value Display
	None (Default) Main Value [%] Pressure Current [mA] (HART only) Temperature

1) Depending on sensor and communication version

Damping	
Damping:	 sec (Default 2 sec)

	Supplementary documentation
	 For an overview of the scope of the associated Technical Documentation, refer to the following: <i>Device Viewer</i> (www.endress.com/deviceviewer): Enter the serial number from the nameplate <i>Endress+Hauser Operations App</i>: Enter the serial number from the nameplate or scan the 2D matrix code (QR code) on the nameplate
Standard documentation	 Technical Information: planning guide The document contains all the technical data on the device and provides an overview of the accessories and other products that can be ordered for the device Brief Operating Instructions: takes you quickly to the 1st measured value The Brief Operating Instructions contain all the essential information from incoming acceptance to initial commissioning Operating Instructions: reference manual The Operating Instructions contain all the information that is required in the various phases of the life cycle of the device: from product identification, incoming acceptance and storage, to mounting, connection, operation and commissioning through to troubleshooting, maintenance and disposal
Supplementary device- dependent documentation	Additional documents are supplied depending on the device version ordered: Always comply strictly with the instructions in the supplementary documentation. The supplementary documentation is an integral part of the device documentation.
Field of Activities	Pressure measurement, powerful instruments for process pressure, differential pressure, level and flow: FA00004P/00/EN
Safety instructions	See Download area of the website.
Special Documentation	Document SD01553P Mechanical accessories for pressure measuring devices The documentation provides an overview of available manifolds, oval flange adapters, pressure gauge valves, shutoff valves, siphons, condensate pots, cable shortening kits, test adapters, flushing rings, block-and-bleed valves and protective roofs.

	Accessories								
Weld-in adapter, Process adapter and Flanges	See technical information TI00426F/00.								
Mounting bracket for wall and pipe mounting	→ 🗎 33								
Suspension clamp (FMB53 only)	→ 🗎 33								
Extension cable shortening kit (FMB53 only)	See Product Configurator, "Accessory enclosed" ordering feature, option "PW" or can be ordered as a separate accessory (part no. 71125862).								
	For details refer to SD00553P/00/A2.								
M12 connector	→ 🗎 25								
Adapter Uni for FMB50	For dimensions and technical data, see Technical Inform	ation TIO	0426F.						
	Designation	FMB50	FMB51	FMB52	FMB53	Option 1)			
	Weld-in adapter G1-1/2, 316L	V	v	V	-	QJ			
	Weld-in tool adapter Uni D65/D85, Brass	V	-	-	-	Q1			
	Weld-in adapter Uni D85, 316L	V	-	-	-	Q2			
	Weld-in adapter Uni D85, 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	Q3			
	Weld-in adapter Uni 6" D85, 316L	V	-	-	-	Q5			
	Weld-in adapter Uni 6" D85, 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	Q6			
	Welding jig adapter Uni 6" D85, brass	V	-	-	-	Q7			
	Weld-in adapter G1-1/2, 316L, 3.1 EN10204-3.1 material, inspection certificate	V	r	r	-	QK			
	Weld-in tool adapter G1-1/2, Brass	V	v	V	-	QL			
	Weld-in flange DRD DN50 65mm, 316L	V	-	-	-	QP			
	Weld-in fl. DRD DN50 65mm, 316L 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	QR			
	Weld-in tool flange DRD DN50 65mm, Brass	V	-	-	-	QS			
	Weld-in adapter Uni D65, 316L	V	-	-	-	QT			
	Weld-in adapter Uni D65, 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	QU			
	Adapter Uni > DIN11851 DN40, 316L, 3.1, slotted-nut, EN10204-3.1 material, inspection certificate	V	-	-	-	R1			
	Adapter Uni > DIN11851 DN50, 316L, 3.1, slotted-nut, EN10204-3.1 material, inspection certificate	V	-	-	-	R2			
	Adapter Uni > DRD DN50 65mm, 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	R3			
	Adapter Uni > Clamp 2", 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	R4			
	Adapter Uni > Clamp 3", 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	R5			
	Adapter Uni > Varivent, 316L, 3.1 EN10204-3.1 material, inspection certificate	V	-	-	-	R6			
	Adapter Uni > DIN11851 DN40, 316L, slotted-nut	V	-	-	-	RA			

Accessories

Designation	FMB50	FMB51	FMB52	FMB53	Option ¹⁾
Adapter Uni > DIN11851 DN50, 316L, slotted-nut	v	-	-	-	RB
Adapter Uni > DRD DN50 65mm, 316L	v	-	-	-	RC
Adapter Uni > Clamp 2", 316L	v	-	-	-	RD
Adapter Uni > Clamp 3", 316L	r	-	-	-	RE
Adapter Uni > Varivent N, 316L	V	-	-	-	RF

1) Product Configurator, "Enclosed accessories" section

Service-specific accessories

Accessories	Description
DeviceCare SFE100	 Configuration tool for HART, PROFIBUS and FOUNDATION Fieldbus field devices Technical Information TI01134S DeviceCare is available to download at www.software-products.endress.com. You need to register in the Endress+Hauser software portal to download the application.
FieldCare SFE500	FDT-based plant asset management tool FieldCare can configure all smart field units in your plant and helps you manage them. By using the status information, FieldCare is also a simple but effective way of checking the status and condition of the field devices.
FieldPort SFP20	 Mobile configuration tool for all IO-Link devices: Pre-installed device and communication DTMs in FieldCare Pre-installed device and communication DTMs in FieldXpert M12 connection for IO-Link field devices
Field Xpert SMT70, SMT77	The Field Xpert SMT70 tablet PC for device configuration enables mobile plant asset management in hazardous (Ex Zone 2) and non-hazardous areas. It is suitable for commissioning and maintenance staff. It manages Endress+Hauser and third-party field instruments with a digital communication interface and documents the progress of the work. The SMT70 is designed as a complete solution. It comes with a pre-installed driver library and is an easy-to-use, touch- enabled tool for managing field devices throughout their entire life cycle. The Field Xpert SMT77 for device configuration enables mobile plant asset management in areas categorized as Ex Zone 1. It is suitable for commissioning and maintenance staff for easy management of field instruments with a digital communication interface. The touch-enabled tablet PC is designed as a complete solution. It comes with comprehensive pre-installed driver libraries and offers users a modern software user interface to manage field instruments throughout the entire life cycle.

Registered trademarks

- KALREZ[®]
- Registered label of E.I. Du Pont de Nemours & Co., Wilmington, USA • TRI-CLAMP[®]
 - Registered label of Ladish & Co., Inc., Kenosha, USA
- HART[®]
- Registered trademark of the FieldComm Group, Austin, USA
- 🛯 IO-Link
- Registered trademark of the IO-Link Community.
- PROFIBUS PA[®]
- Trademark of the PROFIBUS User Organization, Karlsruhe, Germany • FOUNDATIONTM Fieldbus
- Registered trademark of the FieldComm Group, Austin, USA
- GORE-TEX® trademark of W.L. Gore & Associates, Inc., USA



www.addresses.endress.com

