

Technical Information

iTHERM TM411

Trend-setting, modular resistance thermometer for hygienic and aseptic applications



Easy-to-use metric version with outstanding sensor technology

Applications

- Specially designed for use in hygienic and aseptic applications in the Food & Beverages and Life Sciences industries
- Measuring range: -200 to $+600$ °C (-328 to $+1112$ °F)
- Pressure range up to 50 bar (725 psi)
- Protection class: up to IP69K

Head transmitter

All Endress+Hauser transmitters are available with enhanced accuracy and reliability compared to directly wired sensors. Easy customizing by choosing one of the following outputs and communication protocols:

- Analog output 4 to 20 mA, HART®
- PROFIBUS® PA, FOUNDATION Fieldbus™

Your benefits

- User-friendly and reliable from product selection to maintenance
- iTHERM inserts: globally unique, automated production. Full traceability and consistently high product quality for reliable measured values
- iTHERM QuickSens: fastest response times (t_{90s} : 1.5 s) for optimum process control
- iTHERM StrongSens: unsurpassed vibration resistance ($> 60g$) for ultimate plant safety
- iTHERM QuickNeck – cost and time savings thanks to simple, tool-free recalibration
- iTHERM TA30R: 316L terminal head for easier handling and lower installation and maintenance costs, and with highest IP69K rating
- International certification: explosion protection e.g. ATEX/IECEx and in compliance with hygiene standards according to 3-A®, EHEDG, ASME BPE, FDA, TSE Certificate of Suitability

Table of contents

Function and system design	3	Thermowell	38
iTHERM Hygiene line	3	Certificates and approvals	47
Measuring principle	3	Hygiene standard	47
Measuring system	4	Materials in contact with food/product (FCM)	47
Modular design	5	CRN approval	47
Input	7	Surface cleanliness	48
Measured variable	7	Material resistance	48
Measuring range	7	Ordering information	48
Output	7	Accessories	48
Output signal	7	Device-specific accessories	49
Family of temperature transmitters	7	Communication-specific accessories	50
Power supply	8	Service-specific accessories	51
Wiring diagram for RTD	8	System components	52
Cable entries	9	Supplementary documentation	52
Device plug	9	Brief Operating Instructions (KA)	52
Overvoltage protection	11	Operating Instructions (BA)	52
Performance characteristics	11	Safety Instructions (XA)	52
Reference conditions	11	Functional Safety Manual (FY/SD)	52
Accuracy	12	Registered trademarks	52
Influence of ambient temperature	12		
Self heating	12		
Response time	13		
Calibration	14		
Insulation resistance	15		
Mounting	16		
Orientation	16		
Installation instructions	16		
Environment	19		
Ambient temperature range	19		
Storage temperature	19		
Humidity	19		
Climate class	19		
Degree of protection	19		
Shock and vibration resistance	19		
Electromagnetic compatibility (EMC)	19		
Process	19		
Process temperature range	19		
Thermal shock	19		
Process pressure range	20		
Medium - state of aggregation	20		
Mechanical construction	21		
Design, dimensions	21		
Insert	32		
Weight	32		
Material	32		
Surface roughness	33		
Terminal heads	33		
Extension neck	36		

Function and system design

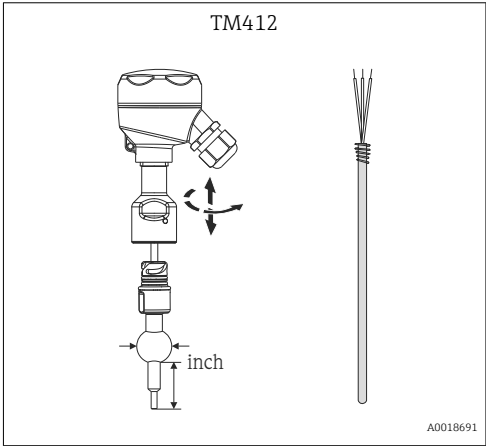
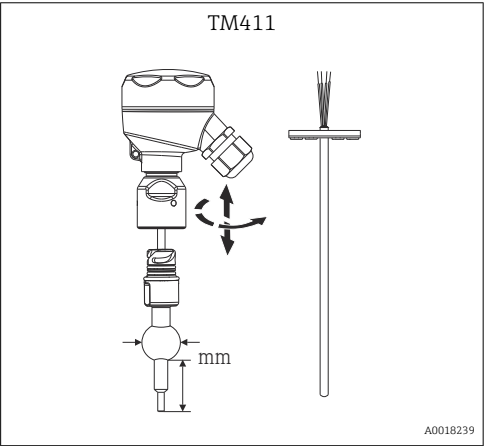
iTHERM Hygiene line

This thermometer is part of the product line of modular thermometers for hygienic and aseptic applications.

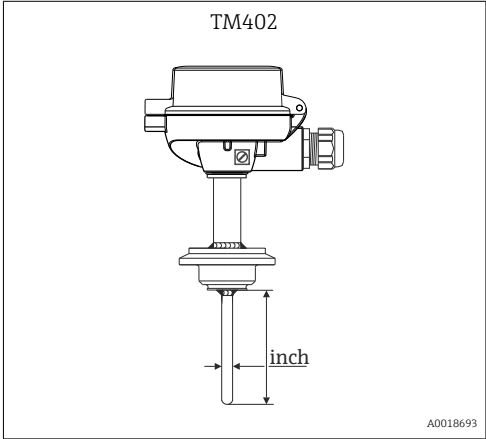
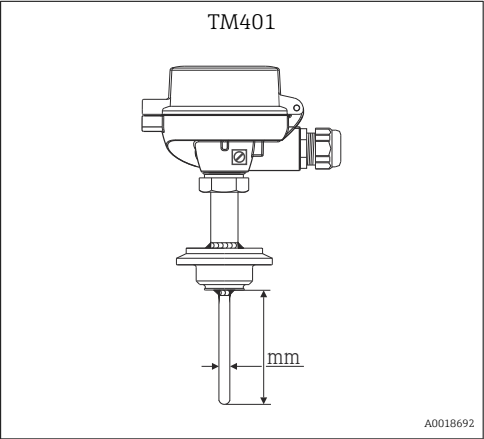
Differentiating factors when selecting a suitable thermometer

TM4x1	TM4x2
Metric version	Imperial version

TM41x characterizes the device that uses cutting-edge technology, with features such as a replaceable insert, quick-fastening extension neck (iTHERM QuickNeck), vibration-resistant and fast-response sensor technology (iTHERM StrongSens and QuickSens) and approval for use in hazardous areas



TM40x characterizes the device that uses basic technology, with features such as a fixed, non-replaceable insert, application in non-hazardous areas, standard extension neck, low-cost unit



Measuring principle

Resistance thermometer (RTD)

These resistance thermometers use a Pt100 temperature sensor according to IEC 60751. The temperature sensor is a temperature-sensitive platinum resistor with a resistance of 100 Ω at 0 °C (32 °F) and a temperature coefficient $\alpha = 0.003851 \text{ } ^\circ\text{C}^{-1}$.

There are generally two different kinds of platinum resistance thermometers:

- **Wire wound (WW):** Here, a double coil of fine, high-purity platinum wire is located in a ceramic support. This is then sealed top and bottom with a ceramic protective layer. Such resistance thermometers not only facilitate very reproducible measurements but also offer good long-term stability of the resistance/temperature characteristic within temperature ranges up to 600 °C (1 112 °F). This type of sensor is relatively large in size and it is comparatively sensitive to vibrations.
- **Thin film platinum resistance thermometers (TF):** A very thin, ultrapure platinum layer, approx. 1 µm thick, is vaporized in a vacuum on a ceramic substrate and then structured photolithographically. The platinum conductor paths formed in this way create the measuring resistance. Additional covering and passivation layers are applied and reliably protect the thin platinum layer from contamination and oxidation, even at high temperatures.

The primary advantages of thin film temperature sensors over wire wound versions are their smaller sizes and better vibration resistance. A relatively low principle-based deviation of the resistance/temperature characteristic from the standard characteristic of IEC 60751 can frequently be observed among TF sensors at high temperatures. As a result, the tight limit values of tolerance category A as per IEC 60751 can only be observed with TF sensors at temperatures up to approx. 300 °C (572 °F).

Thermocouples (TC)

Thermocouples are comparatively simple, robust temperature sensors which use the Seebeck effect for temperature measurement: if two electrical conductors made of different materials are connected at a point, a weak electrical voltage can be measured between the two open conductor ends if the conductors are subjected to a thermal gradient. This voltage is called thermoelectric voltage or electromotive force (emf.). Its magnitude depends on the type of conducting materials and the temperature difference between the "measuring point" (the junction of the two conductors) and the "cold junction" (the open conductor ends). Accordingly, thermocouples primarily only measure differences in temperature. The absolute temperature at the measuring point can be determined from these if the associated temperature at the cold junction is known or is measured separately and compensated for. The material combinations and associated thermoelectric voltage/temperature characteristics of the most common types of thermocouple are standardized in the IEC 60584 and ASTM E230/ANSI MC96.1 standards.

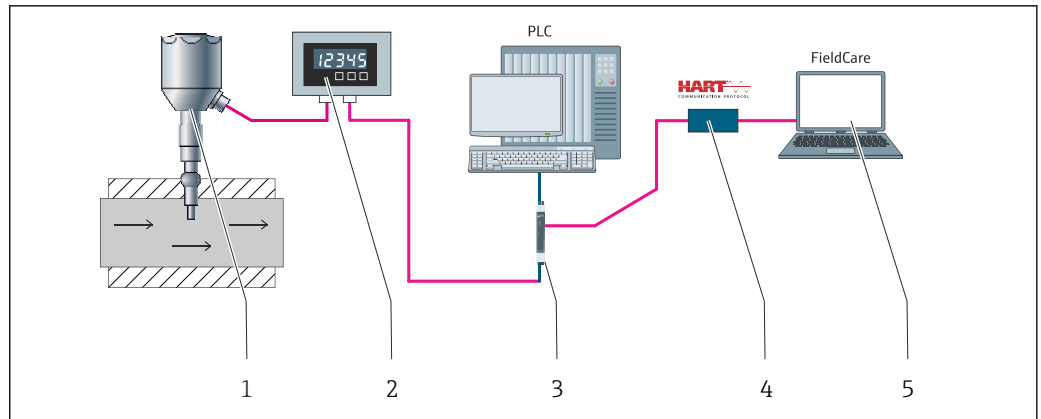
Measuring system

Endress+Hauser offers a complete portfolio of optimized components for the temperature measuring point – everything you need for the seamless integration of the measuring point into the overall facility. This includes:

- Power supply unit/barrier
- Display units
- Overvoltage protection



For more information, see the brochure 'System Components - Solutions for a Complete Measuring Point' (FA00016K/EN)



A0047137

1 Example of application, measuring point layout with additional Endress+Hauser components

- 1 Installed iTHERM compact thermometer with HART communication protocol
- 2 2-wire RIA15 process indicator – The process indicator is looped into the current loop and displays the measuring signal or the HART process variables in digital form. The process indicator does not require an external power supply, as it gets its energy directly from the current loop. More information on this can be found in the Technical Information, under "Documentation".
- 3 Active barrier RN22 – 1- or 2-channel active barrier for the separation of 0/4 to 20 mA standard signal circuits, optionally available as a signal doubler, 24 V DC. HART-transparent. More information on this can be found in the Technical Information, under "Documentation".
- 4 Commubox FXA195 for intrinsically safe HART communication with FieldCare via the USB port.
- 5 FieldCare is a FDT-based plant asset management tool from Endress+Hauser, more details see section 'accessories'. The acquired self-calibration data is stored in the device (1) and can be read using FieldCare. This also enables an auditable calibration certificate to be created and printed.

Modular design

Design	Options	
	1: Terminal head → 33	316L, low head, optionally with display window - Aluminum, high or low head, with or without display window - Polypropylene, low head - Polyamide, high head, without display window Your benefits: - Optimum terminal access thanks to low housing edge of bottom section: - Easier to use - Lower installation and maintenance costs - Optional display: local process display unit for added reliability - IP69K protection: optimum protection even with high-pressure cleaning
	2: Wiring, electrical connection, output signal → 7	- Ceramic terminal block - Flying leads - Head transmitter (4 to 20 mA, HART, PROFIBUS PA, FOUNDATION Fieldbus), single-channel or two-channel - Attachable display (optional)
	3: Connector or cable gland → 36	- PROFIBUS PA / FOUNDATION Fieldbus connector, 4-pin 8-pin connector - Polyamide or brass cable glands
	4: Extension neck → 36	Welded-in-place or removable either with the quick fastener (iTHERM QuickNeck) or thread adapter nut G3/8" Your benefits: iTHERM QuickNeck: tool-free removal of the insert: - Saves time/costs on frequently calibrated measuring points - Wiring mistakes avoided - IP69K protection: safety under extreme process conditions
	5: Process connection → 38	More than 50 different versions.

A0017758

Design		Options
	6: Thermowell →  38	▪ Versions with and without protection tube (insert in direct contact with process). ▪ Various diameters ▪ Various tip shapes (straight or reduced)
	7: Insert →  32 with: 7a: iTHERM QuickSens 7b: iTHERM StrongSens	Sensor models: wire wound (WW) or thin-film sensor (TF).  Your benefits: ▪ iTHERM QuickSens - insert with the world's fastest response time: ▪ Insert: Ø3 mm ($\frac{1}{8}$ in) or Ø6 mm ($\frac{1}{4}$ in) ▪ Fast, highly accurate measurements, delivering maximum process safety and control ▪ Quality and cost optimization ▪ Minimization of necessary immersion length: better product protection thanks to improved process flow ▪ iTHERM StrongSens - insert with unbeatable durability: ▪ Vibration resistance > 60g: lower life cycle costs thanks to longer operating life and high plant availability ▪ Automated, traceable production: top quality and maximum process safety ▪ High long-term stability: reliable measured values and high level of system safety

Input

Measured variable	Temperature (temperature-linear transmission behavior)
Measuring range	<i>Depends on the type of sensor used</i>
Sensor type	Measuring range
Pt100 thin-film	-50 to +400 °C (-58 to +752 °F)
Pt100 thin-film, iTHERM StrongSens, vibration-resistant > 60g	-50 to +500 °C (-58 to +932 °F)
Pt100 thin-film, iTHERM QuickSens, fast-response	-50 to +200 °C (-58 to +392 °F)
Pt100 wire wound, extended measuring range	-200 to +600 °C (-328 to +1 112 °F)

Output

Output signal	Generally, the measured value can be transmitted in one of two ways: ■ Directly-wired sensors - sensor measured values forwarded without a transmitter. ■ Via all of the usual protocols by selecting an appropriate Endress+Hauser iTEMP® temperature transmitter. All the transmitters listed below are mounted directly in the terminal head and wired with the sensory mechanism.
Family of temperature transmitters	Thermometers fitted with iTEMP transmitters are an installation-ready complete solution to improve temperature measurement by significantly increasing accuracy and reliability, when compared to direct wired sensors, as well as reducing both wiring and maintenance costs. PC programmable head transmitters They offer a high degree of flexibility, thereby supporting universal application with low inventory storage. The iTEMP transmitters can be configured quickly and easily at a PC. Endress+Hauser offers free configuration software which can be downloaded from the Endress+Hauser Website. More information can be found in the Technical Information. HART® programmable head transmitters The transmitter is a 2-wire device with one or two measuring inputs and one analog output. The device not only transfers converted signals from resistance thermometers and thermocouples, it also transfers resistance and voltage signals using HART® communication. It can be installed as an intrinsically safe apparatus in Zone 1 hazardous areas and is used for instrumentation in the terminal head (flat face) as per DIN EN 50446. Swift and easy operation, visualization and maintenance using universal device configuration tools like FieldCare, DeviceCare or FieldCommunicator 375/475. For more information, see the Technical Information. PROFIBUS® PA head transmitters Universally programmable head transmitter with PROFIBUS® PA communication. Conversion of various input signals into digital output signals. High accuracy over the complete ambient temperature range. The configuration of PROFIBUS PA functions and of device-specific parameters is performed via fieldbus communication. For more information, see the Technical Information. FOUNDATION Fieldbus™ head transmitters Universally programmable head transmitter with FOUNDATION Fieldbus™ communication. Conversion of various input signals into digital output signals. High accuracy over the complete ambient temperature range. All transmitters are released for use in all important process control systems. The integration tests are performed in Endress+Hauser's "System World". For more information, see the Technical Information. Advantages of the iTEMP transmitters: ■ Dual or single sensor input (optionally for certain transmitters) ■ Pluggable display (optionally for certain transmitters) ■ Unsurpassed reliability, accuracy and long-term stability in critical processes

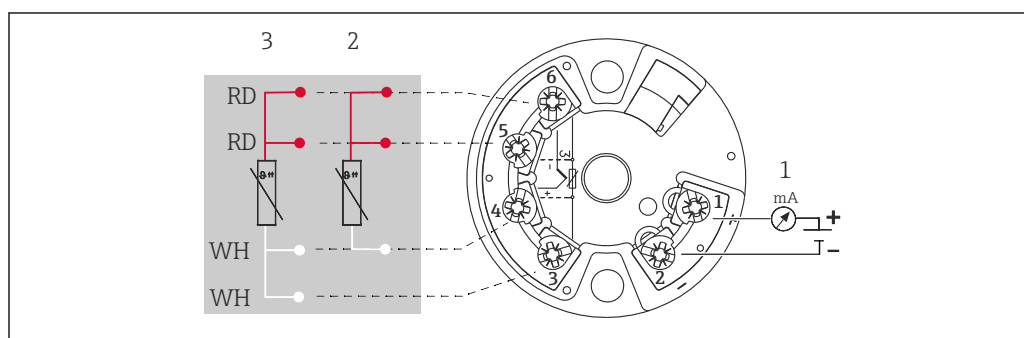
- Mathematical functions
- Monitoring of the thermometer drift, sensor backup functionality, sensor diagnostic functions
- Sensor-transmitter matching for dual sensor input transmitters, based on Callendar/Van Dusen coefficients

Power supply

- i** ■ According to the 3-A Sanitary Standard and the EHEDG, electrical connecting cables must be smooth, corrosion-resistant and easy to clean.
- Grounding or shield connections are possible via special ground terminals on the terminal head. → 33

Wiring diagram for RTD

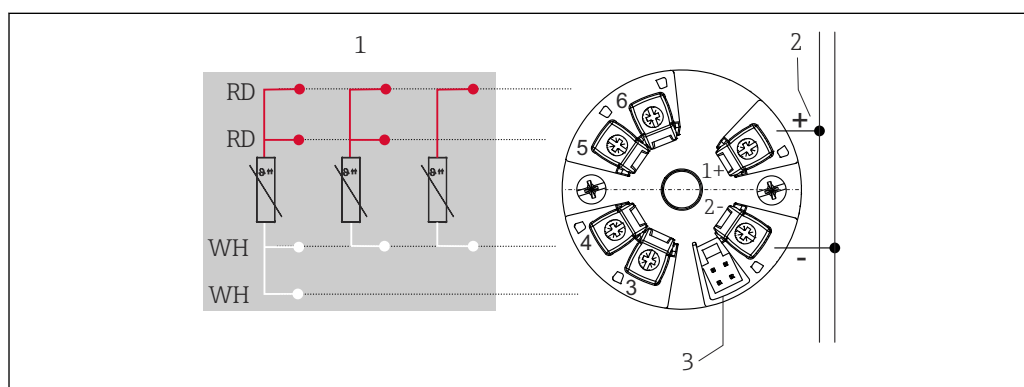
Type of sensor connection



A0045600

2 Head mounted transmitter TMT18x (single input)

- 1 Power supply for head transmitter and analog output 4 to 20 mA or fieldbus connection
- 2 RTD, 3-wire
- 3 RTD, 4-wire

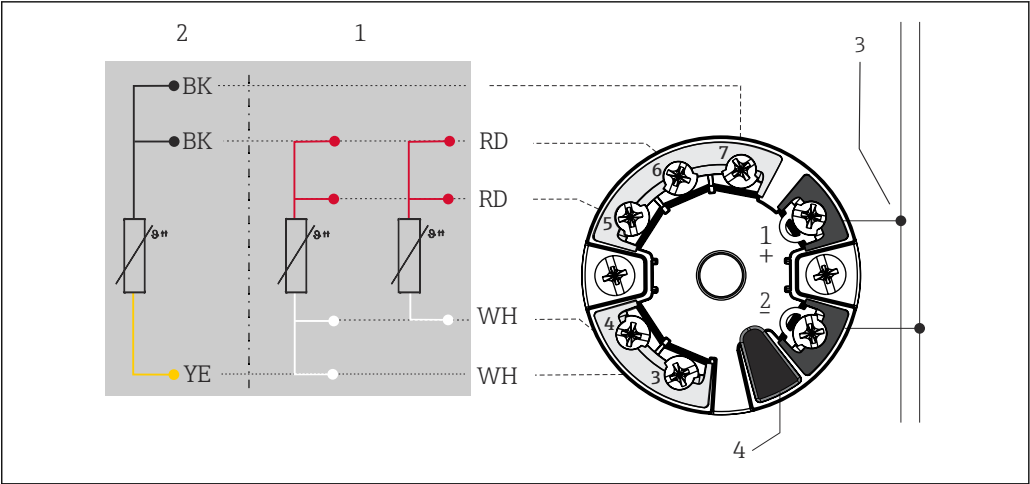


A0047173

3 Head mounted transmitter TMTx1 (single input)

- 1 Sensor input, RTD and Ω : 4-, 3- and 2-wire
- 2 Power supply
- 3 CDI interface, display connection (depends on the head transmitter)

Fitted with push-in terminals if screw terminals are not explicitly selected or a double sensor is installed.

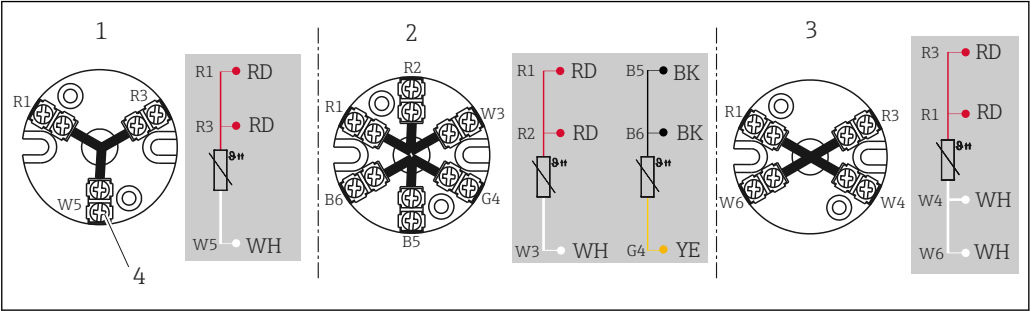


A0045466

4 Head mounted transmitter TMT8x (dual input)

- 1 Sensor input 1, RTD: 4- and 3-wire
- 2 Sensor input 2, RTD: 3-wire
- 3 Power supply or fieldbus connection
- 4 Display connection

Fitted with push-in terminals if screw terminals are not explicitly selected or a double sensor is installed.



A0045453

5 Terminal block mounted

- 1 3-wire, single
- 2 2 x 3-wire, single
- 3 4-wire, single
- 4 Outside screw

Cable entries

See "Terminal heads" section → 33

Device plug


Endress+Hauser offers a wide variety of plugs for the simple and fast integration of the thermometer into a process control system. The following tables show the PIN assignments of the various plug connector combinations.

Abbreviations

#1	Order: first transmitter/insert	#2	Order: second transmitter/insert
i	Insulated. Wires marked 'i' are not connected and are insulated with heat shrink tubes.	YE	Yellow
GND	Grounded. Wires marked 'GND' are connected to the internal grounding screw in the terminal head.	RD	Red
BN	Brown	WH	White
GNYE	Green-yellow	PK	Pink

BU	Blue	GN	Green
GY	Gray	BK	Black

Terminal head with one cable entry

Plug	1x PROFIBUS PA								1x FOUNDATION™ Fieldbus (FF)				8-pin							
Plug thread	M12				7/8"				7/8"				M12							
PIN number	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4	5	6	7	8
Electrical connection (terminal head)																				
Flying leads	Not connected (not insulated)																			
3-wire terminal block (1x Pt100)	RD	RD	WH		RD	RD	WH		RD	RD	WH		RD	RD	WH		i			
4-wire terminal block (1x Pt100)			WH	WH			WH	WH			WH	WH								
6-wire terminal block (2x Pt100)	RD (#1) ₁₎	RD (#1) ₁₎	WH (#1) ₁₎		RD (#1) ₁₎	RD (#1) ₁₎	WH (#1) ₁₎		RD (#1) ₁₎	RD (#1) ₁₎	WH (#1) ₁₎				WH		BK	BK	YE	
1x TMT 4 to 20 mA or HART	+	i	-	i	+	i	-	i	+	i	-	i	+	i	-	i	i			
2x TMT 4 to 20 mA or HART in the terminal head with a high cover	+	+	-	-	+	+	-	-	+	+	-	-								
1x TMT PROFIBUS PA	+	i	-	GND ₂₎	+	i	-	GND ₂₎	Cannot be combined				Cannot be combined							
2x TMT PROFIBUS PA	+		-		+		-													
1x TMT FF	Cannot be combined				Cannot be combined				-	+	GND	i	Cannot be combined							
2x TMT FF									-	+										
PIN position and color code	 1 BN 2 GNYE 3 BU 4 GY A0018929				 1 BN 2 GNYE 3 BU 4 GY A0018930				 1 BU 2 BN 3 GY 4 GNYE A0018931				 3 GN 2 BN 4 YE 1 WH 5 GY 8 RD 6 PK 7 BU							

A0018927

1) Second Pt100 is not connected

2) If a plastic housing TA30S or TA30P is used, insulated 'i' instead of grounded GND

Terminal head with two cable entries

Plug	2x PROFIBUS PA								2x FOUNDATION Fieldbus (FF)			
Plug thread	 #1 #2 A0021706				M12(#1) / M12(#2)				7/8"(#1) / 7/8"(#2)			
PIN number												
	1	2	3	4	1	2	3	4	1	2	3	4
Electrical connection (terminal head)												
Flying leads	Not connected (not insulated)											

Plug	2x PROFIBUS PA								2x FOUNDATION Fieldbus (FF)					
3-wire terminal block (1x Pt100)	RD/i	RD/i	WH/i		RD/i	RD/i	WH/i		RD/i	RD/i	WH/i			
4-wire terminal block (1x Pt100)			WH/i	WH/i			WH/i	WH/i			WH/i	WH/i		
6-wire terminal block (2x Pt100)	RD/BK	RD/BK	WH/YE		RD/BK	RD/BK	WH/YE		RD/BK	RD/BK	WH/YE			
1x TMT 4 to 20 mA or HART	+/i	i/i	-/i	i/i	+/i	i/i	-/i	i/i	+/i	i/i	-/i	i/i		
2x TMT 4 to 20 mA or HART in the terminal head with a high cover	+(#1)/ +(#2)		-(#1)/ -(#2)		+(#1)/ +(#2)		-(#1)/ -(#2)		+(#1)/ +(#2)		-(#1)/ -(#2)			
1x TMT PROFIBUS PA	+/i		-/i	GND/G ND	+/i		-/i	GND/G ND	Cannot be combined					
2x TMT PROFIBUS PA	+(#1)/ +(#2)		-(#1)/ -(#2)		+(#1)/ +(#2)		-(#1)/ -(#2)							
1x TMT FF	Cannot be combined				Cannot be combined				-/i	+/i	i/i	GND/G ND		
2x TMT FF									-(#1)/ -(#2)	+(#1)/ +(#2)				
PIN position and color code	4 3 1 2 1 BN 2 GNYE 3 BU 4 GY A0018929				1 3 2 4 1 BN 2 GNYE 3 BU 4 GY A0018930				1 3 2 4 1 BU 2 BN 3 GY 4 GNYE A0018931					

Connection combination: insert - transmitter

Insert	Transmitter connection ¹⁾			
	TMT180/TMT181/TMT182/TMT71/TMT72/TMT31		TMT82/TMT84/TMT85	
	1x 1-channel	2x 1-channel ²⁾	1x 2-channel	2x 2-channel ²⁾
1x Pt100, flying leads	Pt100 (#1) : transmitter (#1)	Pt100 (#1) : transmitter (#1) (Transmitter (#2) not connected)	Pt100 (#1) : transmitter (#1)	Pt100 (#1) : transmitter (#1) Transmitter (#2) not connected
2x Pt100, flying leads	Pt100 (#1) : transmitter (#1) Pt100 (#2) insulated	Pt100 (#1) : transmitter (#1) Pt100 (#2) : transmitter (#2)	Pt100 (#1) : transmitter (#1) Pt100 (#2) : transmitter (#1)	Pt100 (#1) : transmitter (#1) Pt100 (#2) : transmitter (#1) (Transmitter (#2) not connected)
1x Pt100 with terminal block ²⁾	Pt100 (#1) : transmitter in cover	Cannot be combined	Pt100 (#1) : transmitter in cover	Cannot be combined
2x Pt100 with terminal block ²⁾	Pt100 (#1) : transmitter in cover Pt100 (#2) not connected		Pt100 (#1) : transmitter in cover Pt100 (#2) : transmitter in cover	

- 1) If 2 transmitters are selected in a terminal head, transmitter (#1) is installed directly on the insert. Transmitter (#2) is installed in the high cover. A TAG cannot be ordered for the 2nd transmitter as standard. The bus address is set to the default value and, if necessary, must be changed manually before commissioning.
- 2) Only in the terminal head with a high cover, only 1 transmitter possible. A ceramic terminal block is automatically fitted on the insert.

Overvoltage protection

To protect against overvoltage in the power supply and signal/communication cables for the thermometer electronics, Endress+Hauser offers the HAW562 surge arrester for DIN rail mounting and the HAW569 for field housing installation.



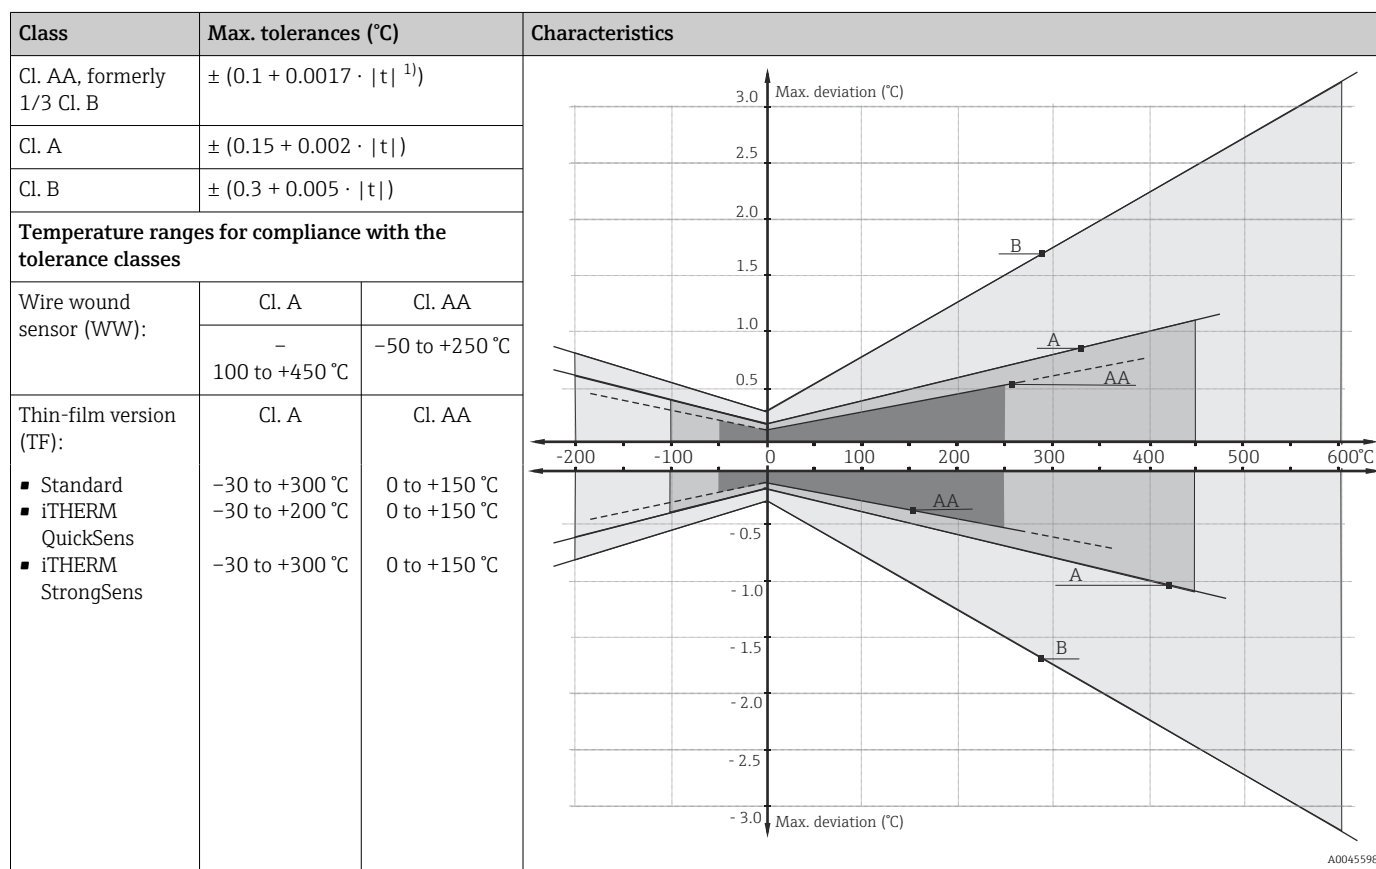
For more information see the Technical Information 'HAW562 Surge arrester' TI01012K and 'HAW569 Surge arrester' TI01013K.

Performance characteristics

Reference conditions

These data are relevant for determining the accuracy of the temperature transmitters used. More information on this can be found in the Technical Information of the iTEMP temperature transmitters.

Accuracy RTD resistance thermometer as per IEC 60751



To get the maximum tolerances in °F, multiply the results in °C by a factor of 1.8.

Influence of ambient temperature

Depends on the head transmitter used. For details, see the Technical Information.

Self heating

RTD elements are passive resistors that are measured using an external current. This measurement current causes a self-heating effect in the RTD element itself which in turn creates an additional measurement error. In addition to the measurement current, the size of the measurement error is also affected by the temperature conductivity and flow velocity of the process. This self-heating error is negligible when an Endress+Hauser iTEMP temperature transmitter (very low measured current) is used.

Response time

Tests have been performed in water at 0.4 m/s (according to IEC 60751) and with a 10 K temperature change.

Response time with heat transfer paste ¹⁾

Thermowell	Shape of tip	Insert	1x Pt100 iTHERM QuickSens, TF		1x Pt100 iTHERM StrongSens, TF		1x Pt100 wire wound WW		2x Pt100 wire wound WW		1x Pt100 standard thin-film TF	
			t ₅₀	t ₉₀	t ₅₀	t ₉₀	t ₅₀	t ₉₀	t ₅₀	t ₉₀	t ₅₀	t ₉₀
Without thermowell	-	Ø6 mm (¼ in)	0.5 s	1.5 s	2.5 s	9.5 s	4 s	11.5 s	4.5 s	12 s	4.75 s	13 s
Ø6 mm (¼ in)	Reduced 4.3 mm (0.17 in) x 20 mm (0.79 in)	Ø3 mm (⅛ in)	1 s	2.5 s	-		8.5 s	26 s	5.5 s	18 s	8 s	23 s
Ø9 mm (0.35 in)	Straight	Ø6 mm (¼ in)	2 s	9 s	8 s	27 s	15 s	45 s	15 s	45 s	9.5 s	27 s
	Reduced 5.3 mm (0.21 in) x 20 mm (0.79 in)	Ø3 mm (⅛ in)	1.25 s	4 s	-		7 s	20 s	7 s	20 s	7 s	23 s
	Tapered 6.6 mm (0.26 in) x 60 mm (2.36 in)	Ø3 mm (⅛ in)	2.5 s	12 s	-		14 s	49 s	12 s	40 s	15 s	51 s
Ø12.7 mm (½ in)	Straight	Ø6 mm (¼ in)	4 s	26 s	12 s	54 s	23 s	81 s	23 s	81 s	31 s	100 s
	Reduced 5.3 mm (0.21 in) x 20 mm (0.79 in)	Ø3 mm (⅛ in)	1.5 s	5.5 s	-		9 s	27 s	9 s	27 s	6.5 s	21 s
	Reduced 8 mm (0.31 in) x 32 mm (1.26 in)	Ø6 mm (¼ in)	6 s	36 s	11 s	44 s	22 s	69 s	22 s	69 s	26 s	90 s

1) If using a thermowell.

Response time without heat transfer paste ¹⁾

Thermowell	Shape of tip	Insert	1x Pt100 iTHERM QuickSens, TF		1x Pt100 iTHERM StrongSens, TF		1x Pt100 wire wound WW		2x Pt100 wire wound WW		1x Pt100 standard thin-film TF	
			t ₅₀	t ₉₀	t ₅₀	t ₉₀	t ₅₀	t ₉₀	t ₅₀	t ₉₀	t ₅₀	t ₉₀
Without thermowell	-	Ø3 mm (⅛ in)	0.5 s	0.75 s	-		1.75 s	5 s	2 s	6 s	2.5 s	5.5 s
		Ø6 mm (¼ in)		1.5 s	2.5 s	9.5 s	4 s	11.5 s	4.5 s	12 s	4.75 s	13 s
Ø6 mm (¼ in)	Reduced 4.3 mm (0.17 in) x 20 mm (0.79 in)	Ø3 mm (⅛ in)	1 s	3 s	-		9 s	27 s	7.5 s	24 s	8.5 s	28 s
Ø9 mm (0.35 in)	Straight	Ø6 mm (¼ in)	2 s	9 s	8 s	29 s	19 s	62 s	19 s	62 s	13.5 s	42 s
	Reduced 5.3 mm (0.21 in) x 20 mm (0.79 in)	Ø3 mm (⅛ in)	1.5 s	5 s	-		7 s	21 s	7 s	21 s	8 s	22 s
	Tapered 6.6 mm (0.26 in) x 60 mm (2.36 in)	Ø3 mm (⅛ in)	5 s	23 s	-		13 s	45 s	13 s	45 s	15.5 s	60 s
Ø12.7 mm (½ in)	Straight	Ø6 mm (¼ in)	5.5 s	41 s	12 s	54 s	23 s	82 s	23 s	82 s	32 s	105 s
	Reduced 5.3 mm (0.21 in) x 20 mm (0.79 in)	Ø3 mm (⅛ in)	2 s	6 s	-		10 s	30 s	10 s	30 s	8 s	30 s
	Reduced 8 mm (0.31 in) x 32 mm (1.26 in)	Ø6 mm (¼ in)	14.5 s	65 s	16 s	53 s	26 s	85 s	26 s	85 s	32 s	108 s

1) If using a thermowell.



Response time for directly wired insert without transmitter.

Calibration

Calibration of thermometers

Calibration involves comparing the measured values of a device under test (DUT) with those of a more precise calibration standard using a defined and reproducible measurement method. The aim is to determine the deviation of the DUT's measured values from the true value of the measured variable. Two different methods are used for thermometers:

- Calibration at fixed-point temperatures, e.g. at the freezing point of water at 0 °C,
- Calibration compared against a precise reference thermometer.

The thermometer to be calibrated must display the fixed point temperature or the temperature of the reference thermometer as accurately as possible. Temperature-controlled calibration baths with very homogeneous thermal values, or special calibration furnaces are typically used for thermometer calibrations. The measuring uncertainty may increase due to heat conduction errors and short immersion lengths. The existing measuring uncertainty is recorded on the individual certificate of calibration. For accredited calibrations in accordance with ISO17025, a measuring uncertainty that is twice as high as the accredited measuring uncertainty is not permitted. If this limit is exceeded, only a factory calibration is possible.

Evaluation of thermometers

If a calibration with an acceptable uncertainty of measurement and transferable measurement results is not possible, Endress+Hauser offers customers a thermometer evaluation measurement service, if technically feasible. This is the case when:

- The process connections/flanges are too big or the immersion length (IL) is too short to allow the DUT to be immersed sufficiently in the calibration bath or furnace (see the following table), or
- Due to heat conduction along the thermometer tube, the resulting sensor temperature generally deviates significantly from the actual bath/furnace temperature.

The measured value of the DUT is determined using the maximum possible immersion depth and the specific measuring conditions and measurement results are documented on an evaluation certificate.

Sensor transmitter matching

The resistance/temperature curve of platinum resistance thermometers is standardized but in practice it is rarely possible to keep to the values precisely over the entire operating temperature range. For this reason, platinum resistance sensors are divided into tolerance classes, such as Class A, AA or B as per IEC 60751. These tolerance classes describe the maximum permissible deviation of the specific sensor characteristic curve from the standard curve, i.e. the maximum temperature-dependent characteristic error that is permitted. The conversion of measured sensor resistance values to temperatures in temperature transmitters or other meter electronics is often susceptible to considerable errors as the conversion is generally based on the standard characteristic curve.

When using E+H temperature transmitters, this conversion error can be reduced significantly by sensor-transmitter matching:

- Calibration at three temperatures at least and determination of the actual temperature sensor characteristic curve,
- Adjustment of the sensor-specific polynomial function using Calendar-van Dusen (CvD) coefficients,
- Configuration of the temperature transmitter with the sensor-specific CvD coefficients for resistance/temperature conversion, and
- another calibration of the reconfigured temperature transmitter with connected resistance thermometer.

Endress+Hauser offers its customers this kind of sensor-transmitter matching as a separate service. Furthermore, the sensor-specific polynomial coefficients of platinum resistance thermometers are always provided on every Endress+Hauser calibration certificate where possible, e.g. at least three calibration points, so that users themselves can also appropriately configure suitable temperature transmitters.

For the device, Endress+Hauser offers standard calibrations at a reference temperature of -80 to +600 °C (-112 to +1 112 °F) based on the ITS90 (International Temperature Scale). Calibrations in other temperature ranges are available from your Endress+Hauser sales center on request. Calibrations are traceable to national and international standards. The calibration certificate is referenced to the serial number of the device. Only the insert is calibrated.

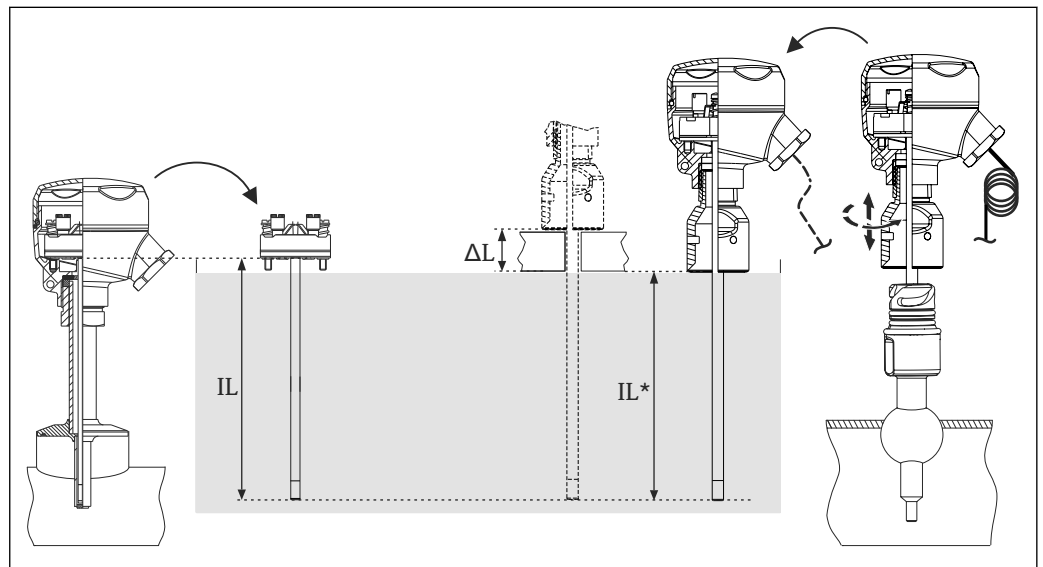
Minimum insertion length (IL) for inserts required to perform a correct calibration



Due to the limitations of furnace geometries, the minimum insertion lengths must be observed at high temperatures to enable a calibration to be performed with an acceptable degree of measuring uncertainty. The same applies when using a head transmitter. Due to heat conduction, minimum lengths must be observed in order to guarantee the functionality of the transmitter -40 to +85 °C (-40 to 185 °F)

Calibration temperature	Minimum insertion length IL in mm without head transmitter
-196 °C (-320.8 °F)	120 mm (4.72 in) ¹⁾
-80 to 250 °C (-112 to 482 °F)	No minimum insertion length required ²⁾
251 to 550 °C (483.8 to 1022 °F)	300 mm (11.81 in)
551 to 600 °C (1023.8 to 1112 °F)	400 mm (15.75 in)

- 1) Min. 150 mm (5.91 in) is required
2) At a temperature of +80 to +250 °C (+176 to +482 °F) and with TMT, min. 50 mm (1.97 in) is required



A0018625

6 Insertion lengths for sensor calibration

IL Maximum possible insertion length for factory calibration or recalibration onsite without the iTHERM QuickNeck extension neck

IL* Maximum possible insertion length for recalibration onsite with the iTHERM QuickNeck extension neck

ΔL Additional length, depending on the calibration unit, if the insert cannot be fully immersed

- To check the actual accuracy rating of the thermometers installed, a cyclic calibration of the installed sensor is frequently performed. The insert is normally removed for comparison with a precise reference thermometer in the calibration bath (see graphic, left part).
- The iTHERM QuickNeck enables quick, tool-free removal of the insert for calibration purposes. The entire upper part of the thermometer is released by turning the terminal head. The insert is removed from the thermowell and directly immersed into the calibration bath (see graphic, right part). Make sure that the cable is long enough to be able to reach the mobile calibration bath with the cable connected. If this is not possible for the calibration, it is advisable to use a connector.
→ 36

Advantages of iTHERM QuickNeck:

- Considerable time savings when recalibrating the device (up to 20 minutes per measuring point)
- Wiring mistakes avoided when re-installing
- Minimum plant downtime, thereby saving costs

Formulas for calculating the IL* when recalibrating onsite with iTHERM QuickNeck

Version, with M24x1.5 or NPT ½" thread to terminal head	Formula
Thermowell diameter 6 mm (¼ in)	$IL^* = U + T + 5 \text{ mm (0.2 in)}$
Thermowell diameter 9 mm (0.35 in)	$IL^* = U + T - 25 \text{ mm (0.98 in)}$
Thermowell diameter 12.7 mm (½ in)	$IL^* = U + T + 5 \text{ mm (0.2 in)}$

Insulation resistance

Insulation resistance $\geq 100 \text{ M}\Omega$ at ambient temperature, measured between the terminals and the outer jacket with a minimum voltage of $100 \text{ V}_{\text{DC}}$.

Mounting

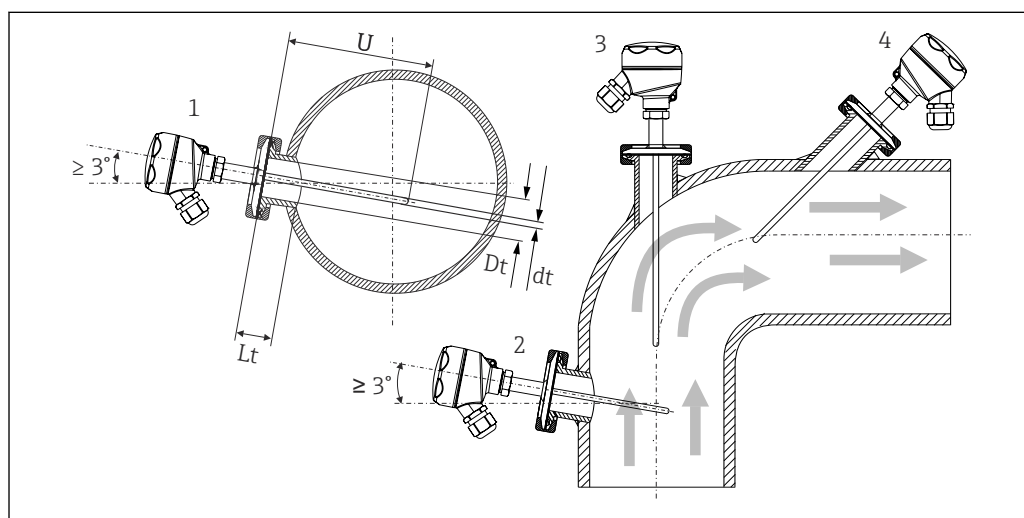
Orientation

No restrictions. However, self-draining in the process must be guaranteed. If there is an opening to detect leaks at the process connection, this opening must be at the lowest possible point.

Installation instructions

The immersion length of the thermometer can influence the accuracy. If the immersion length is too small then errors in the measurement are caused by heat conduction via the process connection and the container wall. If installing in a pipe, the immersion length should ideally correspond to half of the pipe diameter.

- Installation possibilities: pipes, tanks or other plant components
- To minimize the heat conduction error, a minimum immersion length is recommended depending on the type of sensor used and the design of the insert. This immersion length corresponds to the minimum insertion length for the calibration.
- ATEX certification: Observe the installation instructions in the Ex documentation!



A0008946

7 Installation examples

- 1, 2 Perpendicular to the flow direction, installed at a min. angle of 3° to ensure self-draining
 3 On elbows
 4 Inclined installation in pipes with a small nominal diameter
 U Immersion length

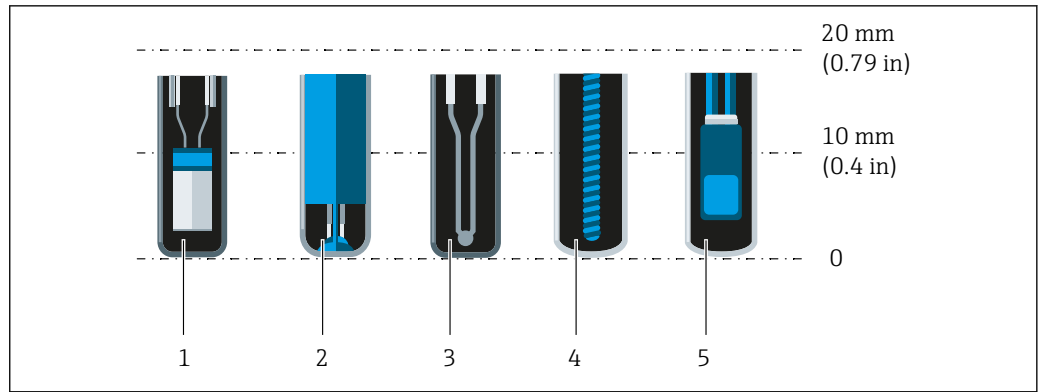
i In the case of pipes with a small nominal diameter, it is advisable for the tip of the thermometer to project well into the process so that it extends past the pipe axis. Installation at an angle (4) could be another solution. When determining the immersion length or installation depth, all the parameters of the thermometer and of the medium to be measured must be taken into account (e.g. flow velocity, process pressure).

i The requirements of the EHEDG and the 3-A Sanitary Standard must be adhered to.

Installation instructions EHEDG/cleanability: $L_t \leq (D_t - d_t)$

Installation instructions 3-A/cleanability: $L_t \leq 2(D_t - d_t)$

Pay attention to the exact position of the sensor element in the thermometer tip.



A0041814

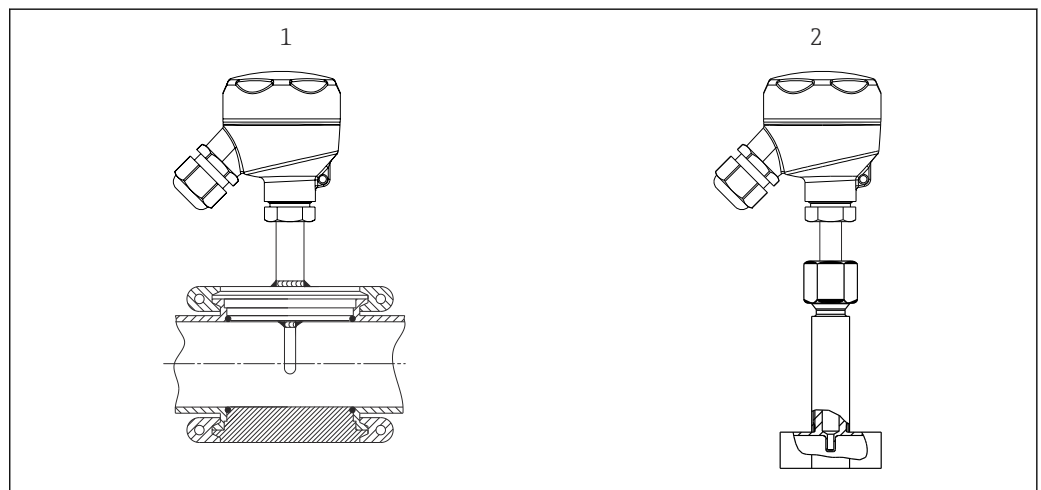
- 1 StrongSens or TrustSens at 5 to 7 mm (0.2 to 0.28 in)
- 2 QuickSens at 0.5 to 1.5 mm (0.02 to 0.06 in)
- 3 Thermocouple (not grounded) at 3 to 5 mm (0.12 to 0.2 in)
- 4 Wire wound sensor at 5 to 20 mm (0.2 to 0.79 in)
- 5 Standard thin-film sensor at 5 to 10 mm (0.2 to 0.39 in)

To keep the influence of heat dissipation to a minimum and to achieve the best possible measurement results, 20 to 25 mm (0.79 to 0.98 in) should be in contact with the medium in addition to the actual sensor element.

This results in the following recommended minimum immersion lengths

- TrustSens or StrongSens 30 mm (1.18 in)
- QuickSens 25 mm (0.98 in)
- Wire wound sensor 45 mm (1.77 in)
- Standard thin-film sensor 35 mm (1.38 in)

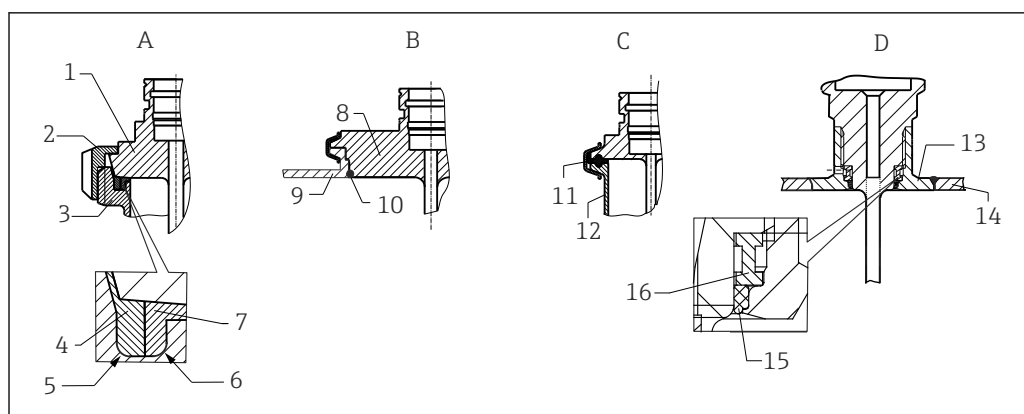
It is particularly important to take this into consideration for T-pieces, as the immersion length is very short on account of their design, and the measured error is higher as a result. It is therefore recommended to use elbow pieces with QuickSens sensors.



A0041794

8 Process connections for thermometer installation in pipes with small nominal diameters

- 1 Varivent® process connection type N for DN40
- 2 Elbow piece or T-piece (illustrated) for weld-in as per DIN 11865 / ASME BPE



■ 9 Detailed installation instructions for hygiene-compliant installation (depends on the version ordered)

- A Milk pipe connection according to DIN 11851, only in connection with EHEDG certified and self-centering sealing ring
- 1 Sensor with milk pipe connection
 - 2 Groove slip-on nut
 - 3 Counterpart connection
 - 4 Centering ring
 - 5 R0.4
 - 6 R0.4
 - 7 Sealing ring
- B Varivent® process connection for VARINLINE® housing
- 8 Sensor with Varivent connection
 - 9 Counterpart connection
 - 10 O-ring
- C Clamp according to ISO 2852
- 11 Gasket seal
 - 12 Counterpart connection
- D Process connection Liquiphant-M G1", horizontal installation
- 13 Weld-in adapter
 - 14 Vessel wall
 - 15 O-ring
 - 16 Thrust collar

NOTICE

The following actions must be taken if a sealing ring (O-ring) or seal fails:

- ▶ The thermometer must be removed.
- ▶ The thread and the O-ring joint/sealing surface must be cleaned.
- ▶ The sealing ring or seal must be replaced.
- ▶ CIP must be performed after installation.

i The counterpieces for the process connections and the seals or sealing rings are not included in the scope of delivery for the thermometer. Liquiphant M weld-in adapters with related seal kits are available as accessories. → 48.

In the case of weld-in connections, exercise the necessary degree of care when performing the welding work on the process side:

1. Use suitable welding material.
 2. Flush-weld or weld with welding radius $\geq 3.2 \text{ mm}$ (0.13 in).
 3. Avoid crevices, folds or gaps.
 4. Ensure the surface is honed and mechanically polished, $R_a \leq 0.76 \text{ } \mu\text{m}$ (30 μin).
1. As a general rule, the thermometers should be installed in such a way that does not impact their ability to be cleaned (the requirements of the 3-A Sanitary Standard must be observed).

2. The Varivent® and Liquiphant-M weld-in adapter and Ingold (+ weld-in adapter) connections enable flush-mounted installation.



For the requirements for installation according to the EHEDG and 3-A Sanitary Standard, see the Operating Instructions for the modular hygienic thermometers.

Operating Instructions BA02023T

Environment

Ambient temperature range	Terminal head	Temperature in °C (°F)						
	Without mounted head transmitter	Depends on the terminal head used and the cable gland or fieldbus connector, see 'Terminal heads' section → 33						
	With mounted head transmitter	−40 to 85 °C (−40 to 185 °F)						
	With mounted head transmitter and display	−20 to 70 °C (−4 to 158 °F)						
	Extension neck	Temperature in °C (°F)						
	iTHERM QuickNeck	−50 to +140 °C (−58 to +284 °F)						
Storage temperature	For information, see the ambient temperature.							
Humidity	Depends on the transmitter used. If using Endress+Hauser iTEMP head transmitters: ■ Condensation permitted as per IEC 60 068-2-33 ■ Max. rel. humidity: 95% as per IEC 60068-2-30							
Climate class	As per EN 60654-1, Class C							
Degree of protection	Max. IP69K, depending on the design (terminal head, connector, etc.)							
Shock and vibration resistance	The Endress+Hauser inserts meet the requirements of IEC 60751 which specify shock and vibration resistance of 3g in the range from 10 to 500 Hz. The vibration resistance at the measuring point depends on the sensor type and design, see the following table:							
	<table><tr><th>Version</th><th>Vibration resistance for the sensor tip</th></tr><tr><td>Pt100 (WW or TF)</td><td>30 m/s² (3g) ¹⁾</td></tr><tr><td>iTHERM StrongSens Pt100 (TF) iTHERM QuickSens Pt100 (TF), version: Ø6 mm (0.24 in)</td><td>> 600 m/s² (60g)</td></tr></table>		Version	Vibration resistance for the sensor tip	Pt100 (WW or TF)	30 m/s² (3g) ¹⁾	iTHERM StrongSens Pt100 (TF) iTHERM QuickSens Pt100 (TF), version: Ø6 mm (0.24 in)	> 600 m/s² (60g)
Version	Vibration resistance for the sensor tip							
Pt100 (WW or TF)	30 m/s² (3g) ¹⁾							
iTHERM StrongSens Pt100 (TF) iTHERM QuickSens Pt100 (TF), version: Ø6 mm (0.24 in)	> 600 m/s² (60g)							
	1) Vibration resistance also applies to quick-fastening iTHERM QuickNeck.							
Electromagnetic compatibility (EMC)	Depends on the head transmitter used. For details see the Technical Information.							

Process

Process temperature range	Depends on the type of sensor used, maximum –200 to +600 °C (–328 to +1 112 °F).
Thermal shock	Thermal shock resistance in CIP/SIP process with a temperature increase and decrease from +5 to +130 °C (+41 to +266 °F) within 2 seconds.

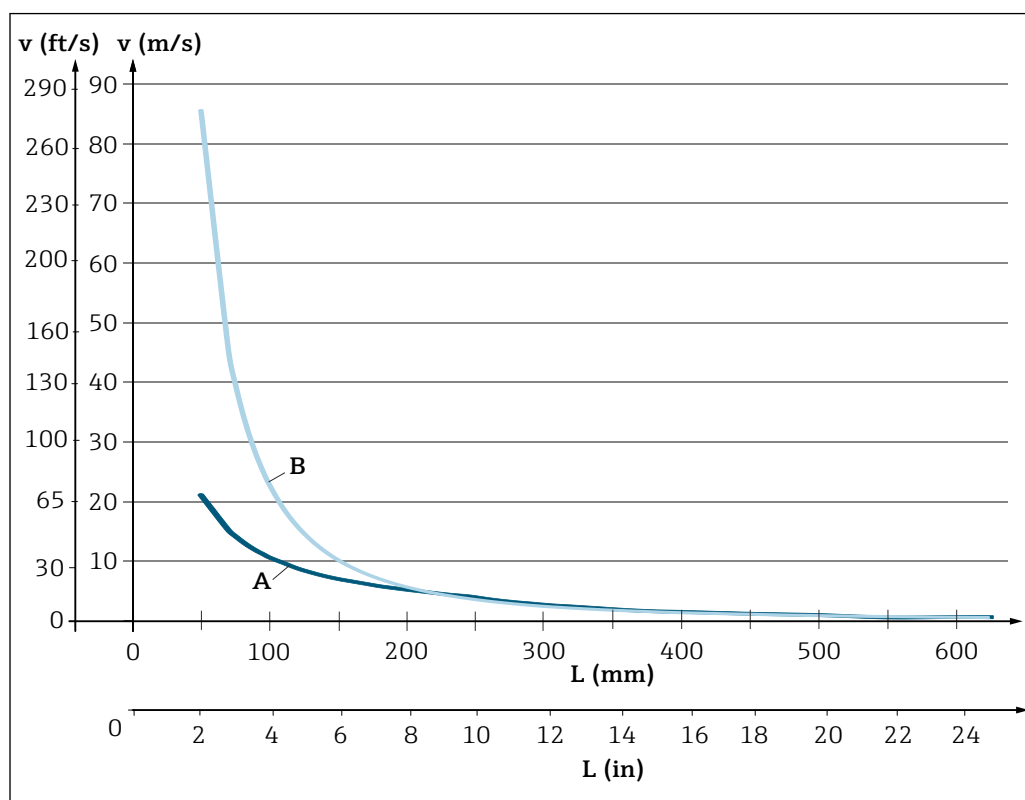
Process pressure range

The maximum possible process pressure depends on various influencing factors, such as the design, process connection and process temperature. For information on the maximum possible process pressures for the individual process connections, see the 'Process connection' section. → 38

i It is possible to check the mechanical loading capacity as a function of the installation and process conditions online in the TW Sizing Module for protection tubes in the Endress+Hauser Applicator software. This is valid for DIN thermowell calculations. See 'Accessories' section.

Example of the permitted flow velocity depending on the immersion length and process medium

The highest flow velocity tolerated by the thermometer diminishes with increasing insert immersion length exposed to the stream of the fluid. In addition it is dependent on the diameter of the thermometer tip, on the kind of measuring medium, on the process temperature and on the process pressure. The following figures exemplify the maximum permitted flow velocities in water and superheated steam at a process pressure of 40 bar (580 PSI).



A0032462

10 Permitted flow velocities, protection tube diameter 9 mm (0.35 in)

A Medium water at $T = 50\text{ }^{\circ}\text{C}$ ($122\text{ }^{\circ}\text{F}$)

B Medium superheated steam at $T = 160\text{ }^{\circ}\text{C}$ ($320\text{ }^{\circ}\text{F}$)

L Immersion length exposed to flow

v Flow velocity

Medium - state of aggregation

Gaseous or liquid (also with high viscosity, e.g. yogurt).

Mechanical construction

Design, dimensions

All dimensions in mm (in). The design of the thermometer depends on the thermowell version used:

- Thermometer without a thermowell
- Diameter 6 mm ($\frac{1}{4}$ in)
- Diameter 9 mm (0.35 in)
- Diameter 12.7 mm ($\frac{1}{2}$ in)
- T-piece and elbow piece thermowell version as per DIN 11865 / ASME BPE for weld-in



Various dimensions, such as the immersion length U for example, are variable values and are therefore indicated as items in the following dimensional drawings.

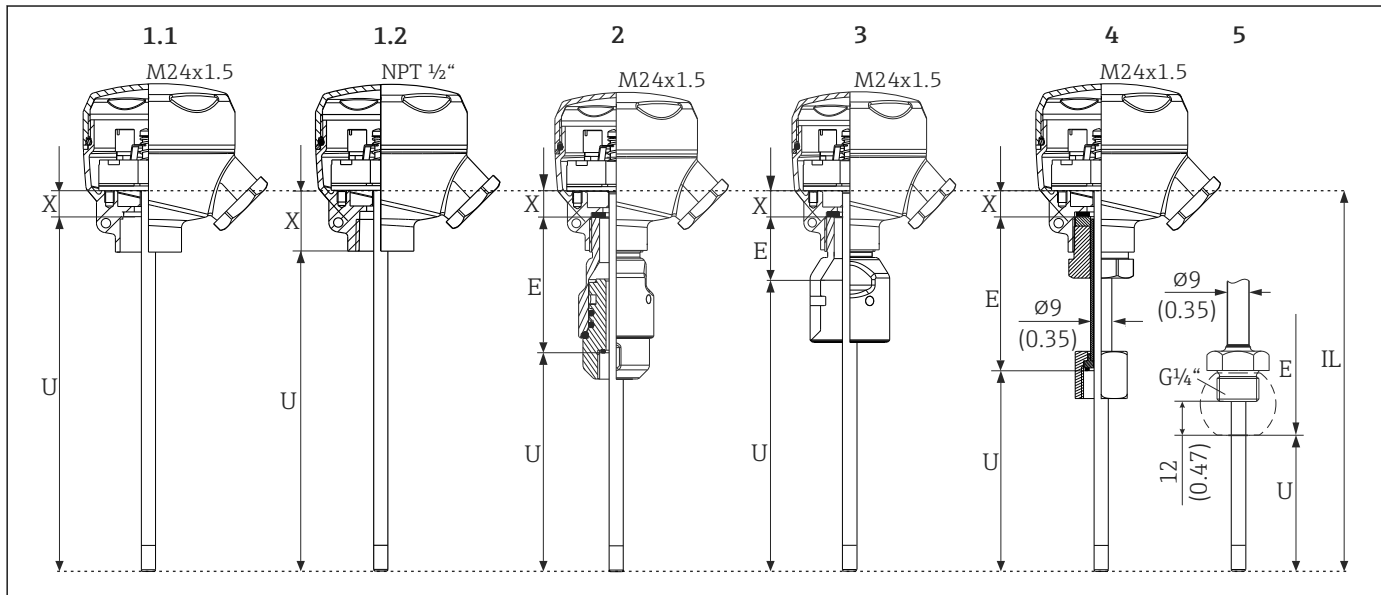
Variable dimensions:

Item	Description
E	Extension neck length, variable depending on configuration or optionally predefined for version with iTHERM QuickNeck
IL	Insertion length of insert
L	Thermowell length (U+T)
B	Thermowell base thickness: predefined, depends on thermowell version (see also the individual table data)
T	Length of thermowell lagging: variable or predefined, depends on thermowell version (see also the individual table data)
U	Immersion length: variable, depending on the configuration
X	Variable for calculating the insertion length of the insert, depends on different screw-in lengths in the terminal head thread M24x1.5 or NPT $\frac{1}{2}$ ", see insert length calculation (IL) → 32 11 Different screw-in lengths in terminal head thread for M24x1.5 and $\frac{1}{2}$" NPT 1 Thread M24x1.5: X = 11 mm (0.43 in), Mat.: 1.4305 (gland) 2 Thread NPT $\frac{1}{2}$": X = 26 mm (1.02 in) or with terminal head TA30S = 31 mm (1.22 in), Mat.: 1.4305 (gland)
ØID	Insert diameter 6 mm ($\frac{1}{4}$ in) or 3 mm ($\frac{1}{8}$ in)

A0020889

Without thermowell

For installation in an existing thermowell



A0018315

1.1 Thermometer without extension neck, insert surface not specified, product structure: feature 80, option A0; $X = 11 \text{ mm}$ (0.43 in) for connection thread M24x1.5

1.2 Thermometer without extension neck, insert surface not specified, product structure: feature 80, option A0; $X = 26 \text{ mm}$ (1.02 in) for connection thread NPT 1/2"; $X = 31 \text{ mm}$ (1.22 in) for connection thread NPT 1/2" and terminal head TA30S

2 Thermometer with quick-fastening iTHERM QuickNeck, top and bottom part, G3/8" female thread for thermowell connection

3 Thermometer with quick-fastening iTHERM QuickNeck, top part

4 Thermometer with replaceable extension neck TE411, G3/8" union nut for thermowell connection

5 Thermometer with replaceable extension neck TE411, male thread G1/4" for compression fitting TK40



Can be selected for all versions: thread M24x1.5 or 1/2" NPT to terminal head

Pay attention to the following equations when calculating the immersion length U for immersion into an existing thermowell TT411:

Version 1	$U = L^{1)} + E^{2)} + 3 \text{ mm}$ (0.12 in) - B
Version 2 and 4	$U = L^{1)} + 3 \text{ mm}$ (0.12 in) - B
Version 3, thermowell diameter 9 mm (0.35 in)	$U = L^{1)} + 3 \text{ mm}$ (0.12 in) (for spring pre-load) - B
Version 3, thermowell diameter 6 mm (1/4 in) / 12.7 mm (1/2 in)	$U = L^{1)} + 36 \text{ mm}$ (1.42 in) + 3 mm (0.12 in) (for spring pre-load) - B
Version 5	$U = U_{(\text{incl. TK40})}$

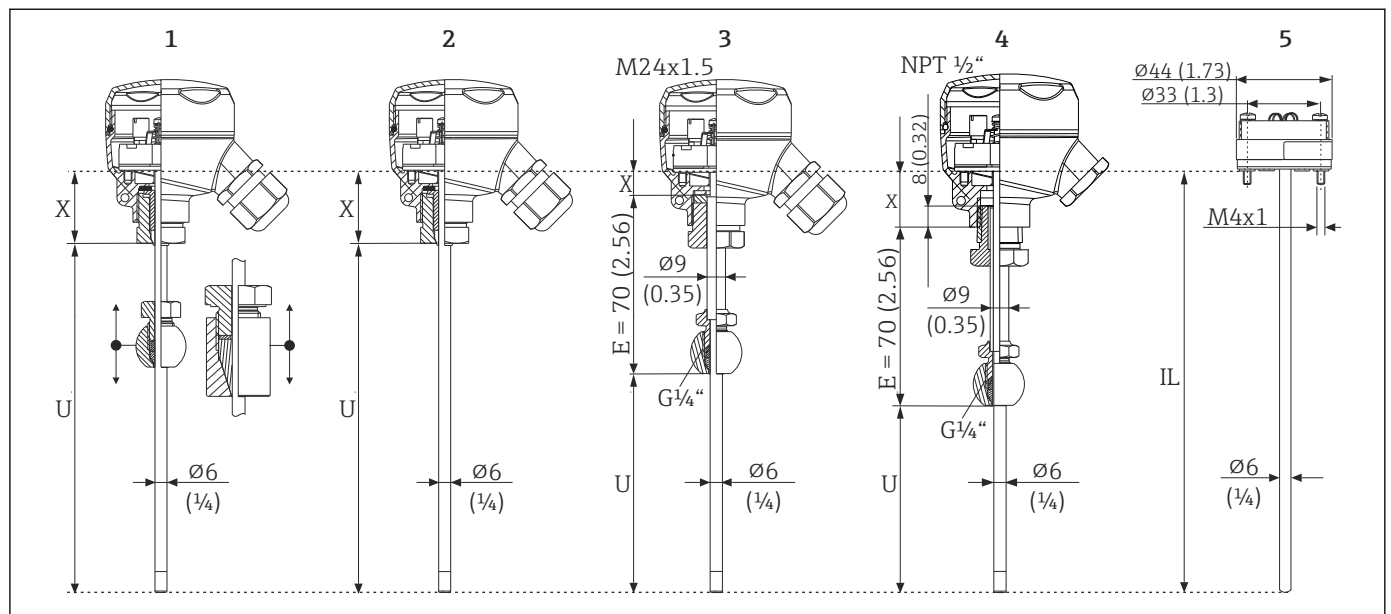
1) L = total length of the thermowell available onsite = $U_{\text{thermowell}} + T_{\text{thermowell}}$

2) E = length of the extension neck provided onsite (if available)

Item (see drawing above)	Version	Length
Extension neck length E	Version 1: Without extension neck	$E = 0$
	Version 2: iTHERM QuickNeck with thread M24x1.5 to terminal head - A0: E not required - X1: E = variable length	62 mm (2.44 in) - Variable, depending on the configuration
	iTHERM QuickNeck with thread NPT 1/2" to terminal head - A0: E not required - X1: E = variable length	51 mm (2.00 in) - Variable, depending on the configuration

Item (see drawing above)	Version	Length
	Version 3: iTHERM QuickNeck top part with thread M24x1.5 to terminal head ■ A0: E not required ■ X1: E= variable length	■ 28 mm (1.1 in) ■ Variable, depending on the configuration
	iTHERM QuickNeck top part with thread NPT ½" to terminal head ■ A0: E not required ■ X1: E= variable length	■ 19.5 mm (0.77 in) ■ Variable, depending on the configuration
	Version 4: With replaceable extension neck, G3/8" union nut for thermowell connection	Variable, depending on the configuration
	Version 5: With replaceable extension neck and male thread G¼" for compression fitting TK40, with thread M24x1.5 or ½" NPT to terminal head	70 mm (2.76 in)
Immersion length U	Independent of the version	Variable, depending on the configuration
Variable length X	■ Connection thread M24x1.5 ■ Connection thread ½" NPT ■ Connection thread ½" NPT and terminal head TA30S $IL = U+E+X$	13 mm (0.51 in) 28 mm (1.1 in) 31 mm (1.22 in)

With compression fitting TK40 as process connection, insert in direct contact with the process

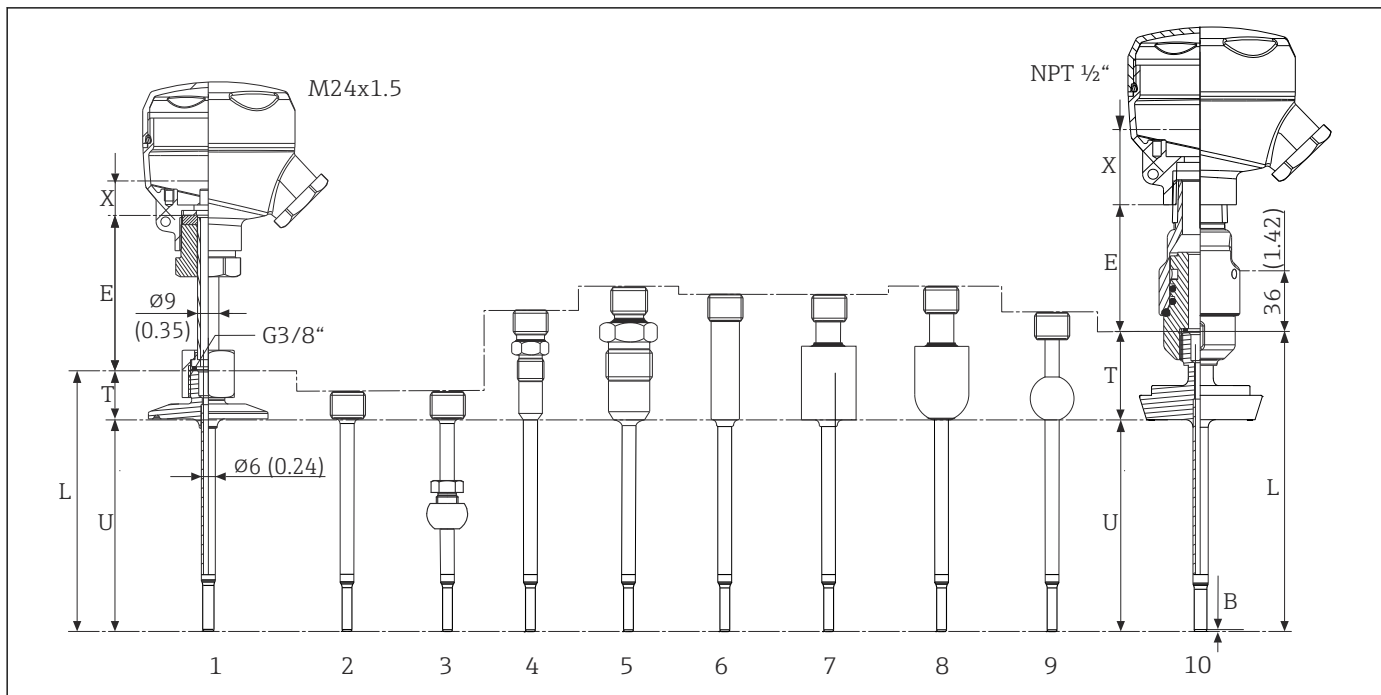


A0017700

- 1 Movable compression fitting TK40 - variably fixable immersion length U, only connection thread M24x1.5
- 2 Without compression fitting for use if compression fitting is available at point of installation, insert with polished surface - product structure: feature 80, option A1 or A3 - only connection thread M24x1.5
- 3 Compression fitting TK40 fixed by extension neck - fixed immersion length U, connection thread M24x1.5
- 4 Compression fitting TK40 fixed by extension neck - fixed immersion length U, connection thread ½" NPT
- 5 Insert, for example with mounted head transmitter

Item	Version	Length
Extension neck length E	Extension neck Ø9 mm (0.35 in)	70 mm (2.76 in)
Immersion length U	Independent of the version	Variable, depending on the configuration
Variable length X	■ Versions 1 and 2: Without extension neck, connection thread M24x1.5 ■ Version 3: With extension neck, connection thread M24x1.5 ■ Version 4: With extension neck, connection thread ½" NPT ■ With extension neck and TA30S terminal head	$IL = U+X$ $IL = U+E+X$ $IL = U+E+X$ $IL = U+E+X$

With thermowell diameter 6 mm (¼ in)



A0017790

- 1 Thermometer with replaceable extension neck TE411 and process connection as clamp version
- 2 Without process connection
- 3 Process connection version as spherical compression fitting TK40
- 4 Process connection version as metal sealing system M12x1.5
- 5 Process connection version as metal sealing system G½"
- 6 Process connection version as cylindrical weld-in adapter Ø12 x 40 mm
- 7 Process connection version as cylindrical weld-in adapter Ø30 x 40 mm
- 8 Process connection version as spherical-cylindrical weld-in adapter Ø30 x 40 mm
- 9 Process connection version as spherical weld-in adapter Ø25 mm
- 10 Thermometer with quick-fastening iTHERM QuickNeck and process connection as sanitary connection according to DIN 11851

- Replaceable extension neck or quick-fastening iTHERM QuickNeck
- Thread M24x1.5 or ½" NPT to terminal head
- G3/8" thread for thermowell connection

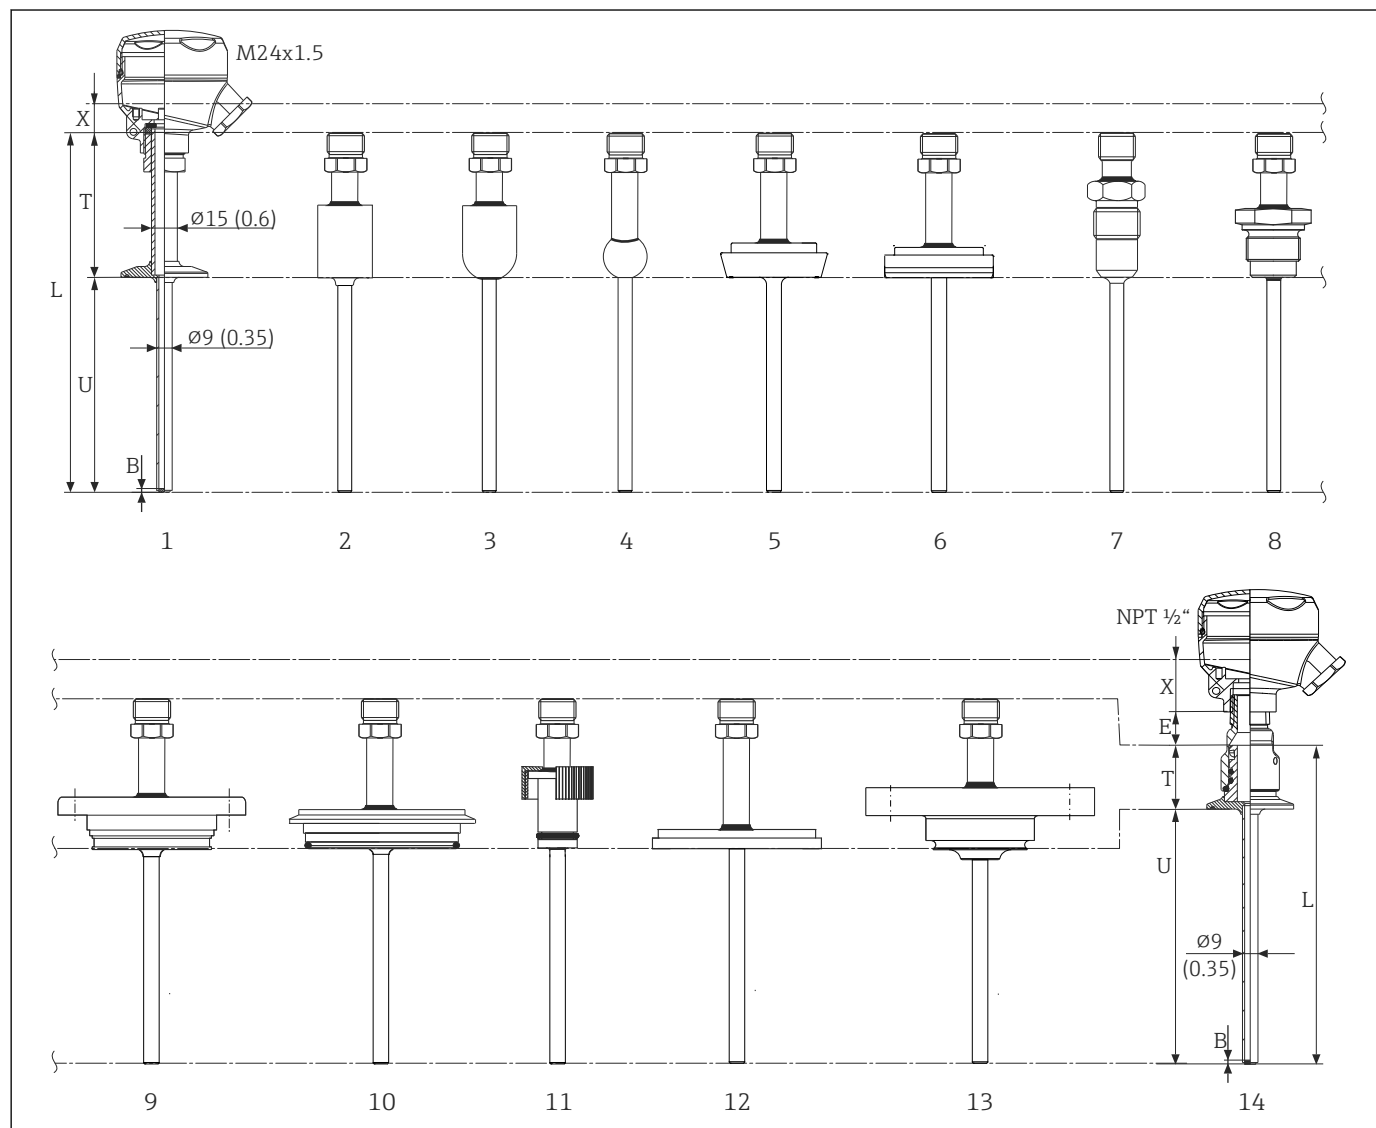
Item	Version	Length
Extension neck length E	Replaceable extension neck Ø9 mm (0.35 in)	Variable, depending on the configuration
	iTHERM QuickNeck with thread M24x1.5 to terminal head, with option: ■ A0: E not required ■ X1: E= variable length	■ 60 mm (2.36 in) ■ Variable, depending on the configuration
	iTHERM QuickNeck with thread NPT ½" to terminal head, with option: ■ A0: E not required ■ X1: E= variable length	■ 51 mm (2.00 in) ■ Variable, depending on the configuration
Length of thermowell lagging T ¹⁾	Metal sealing system M12x1.5	46 mm (1.81 in)
	Metal sealing system G½"	60 mm (2.36 in)
	Tri-clamp (0.5"-0.75")	24 mm (0.94 in)
	Microclamp (DN8-18)	23 mm (0.91 in)
	Clamp DN12 according to ISO 2852	24 mm (0.94 in)
	Clamp DN25/DN40 according to ISO 2852	21 mm (0.83 in)

Item	Version	Length
	Sanitary connection DN25/DN32/DN40 according to DIN 11851	29 mm (1.14 in)
	Spherical-cylindrical weld-in adapter	58 mm (2.28 in)
	Cylindrical weld-in adapter Ø12 mm (0.47 in)	55 mm (2.17 in)
	Without process connection (only G3/8" thread), where necessary with compression fitting TK40	11 mm (0.43 in)
	Cylindrical weld-in adapter	55 mm (2.17 in)
	Spherical weld-in adapter	47 mm (1.85 in)
Immersion length U	Independent of the version	Variable, depending on the configuration
Variable length X	■ With connection thread M24x1.5 ■ With connection thread ½" NPT ■ With terminal head TA30S Calculation of IL for the insert: $IL = U + T + E - B + X$	14 mm (0.55 in) 29 mm (1.14 in) 34 mm (1.34 in)
Base thickness B	Reduced tip Ø4.3 mm (0.17 in)	3 mm (0.12 in)

1) Depends on the process connection

With thermowell diameter 9 mm (0.35 in)

Extension neck not replaceable, but can be separated with the option of the quick-fastening iTHERM QuickNeck.



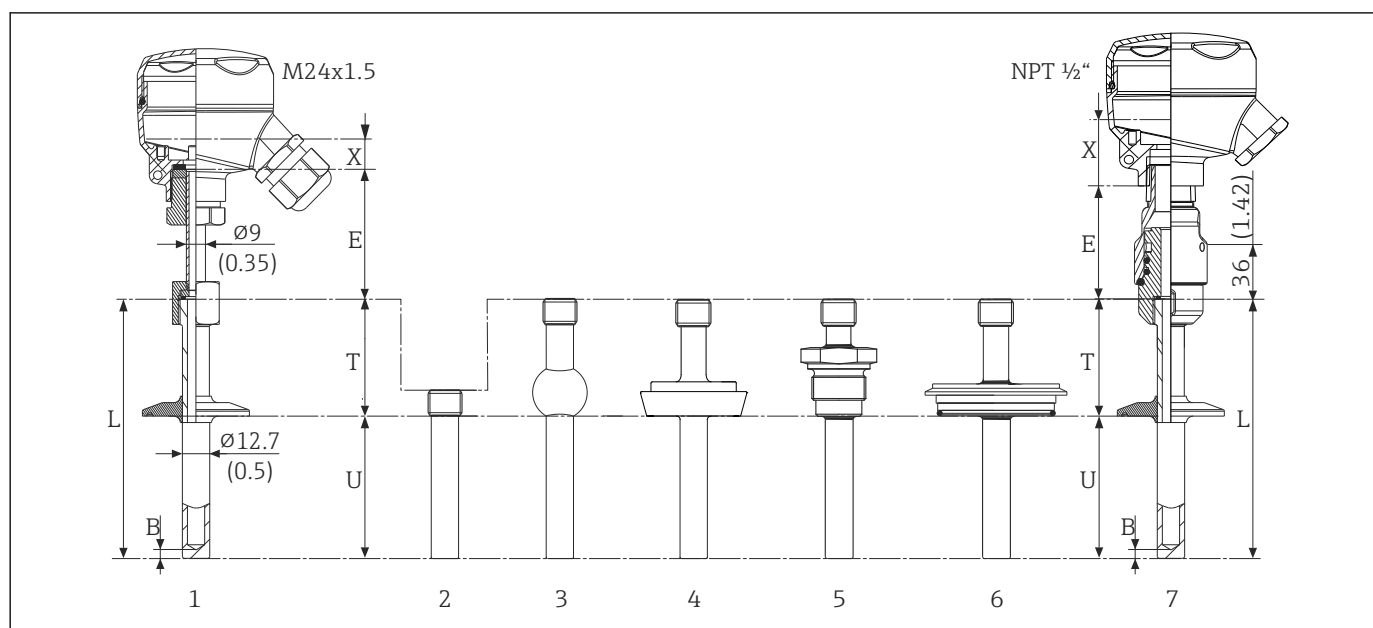
A0017761

- 1 Thermometer without replaceable extension neck, connection thread M24x1.5, process connection as clamp version
- 2 Process connection version as cylindrical weld-in adapter Ø30 x 40 mm
- 3 Process connection version as spherical-cylindrical weld-in adapter Ø30 x 40 mm
- 4 Process connection version as spherical weld-in adapter Ø25 mm
- 5 Process connection version as sanitary connection according to DIN 11851
- 6 Process connection version as aseptic pipe union according to DIN 11864-1 Form A
- 7 Process connection version as metal sealing system G½"
- 8 Process connection thread as per ISO 228 for Liquiphant weld-in adapter
- 9 Process connection version APV Inline
- 10 Process connection version Varivent®
- 11 Process connection version Ingold connection
- 12 Process connection to SMS 1147
- 13 Process connection version Neumo Biocontrol
- 14 Thermometer with quick-fastening iTHERM QuickNeck and process connection, as clamp version for example

Item	Version	Length
Extension neck length E	Without iTHERM QuickNeck	0
	With iTHERM QuickNeck	■ 28 mm (1.1 in) ■ Variable, depending on the configuration
	With thread M24x1.5 to terminal head ■ A0: E not required ■ X1: E= variable length	

Item	Version	Length
	With thread ½" NPT to terminal head ■ A0: E not required ■ X1: E= variable length	■ 19.5 mm (0.8 in) ■ Variable, depending on the configuration
Length of thermowell lagging T	Without iTHERM QuickNeck	Variable, depending on the configuration
	With iTHERM QuickNeck, depending on the process connection:	
	SMS 1147, DN25	40 mm (1.57 in)
	SMS 1147, DN38	41 mm (1.61 in)
	SMS 1147, DN51	42 mm (1.65 in)
	Varivent®, type F, D = 50 mm (1.97 in) Varivent®, type N, D = 68 mm (2.67 in)	52 mm (2.05 in)
	Varivent®, type B, D = 31 mm (1.22 in)	56 mm (2.2 in)
	G1" thread according to ISO 228 for Liquiphant weld-in adapter	77 mm (3.03 in)
	Spherical-cylindrical weld-in adapter	70 mm (2.76 in)
	Cylindrical weld-in adapter	67 mm (2.64 in)
	Aseptic pipe union according to DIN11864-A, DN25	42 mm (1.65 in)
	Aseptic pipe union according to DIN11864-A, DN40	43 mm (1.69 in)
	Sanitary connection according to DIN 11851, DN32	47 mm (1.85 in)
	Sanitary connection according to DIN 11851, DN40	
	Sanitary connection according to DIN 11851, DN50	48 mm (1.89 in)
	Clamp according to ISO 2852, DN12	39 mm (1.54 in)
	Clamp according to ISO 2852, DN25	
	Clamp according to ISO 2852, DN40	
	Clamp according to ISO 2852, DN63.5	47 mm (1.85 in)
	Clamp according to ISO 2852, DN70	
	Microclamp (DN18)	46 mm (1.81 in)
	Tri-clamp (0.75")	78 mm (3.07 in)
	Ingold connection Ø25 mm (0.98 in) x 30 mm (1.18 in)	94 mm (3.7 in)
	Ingold connection Ø25 mm (0.98 in) x 46 mm (1.81 in)	74 mm (2.91 in)
	Metal sealing system G½"	51 mm (2.01 in)
	APV-Inline, DN50	
Immersion length U	Independent of the version	Variable, depending on the configuration
Variable length X	■ Without iTHERM QuickNeck, connection thread M24x1.5 ■ With iTHERM QuickNeck, connection thread M24x1.5 ■ With iTHERM QuickNeck, connection thread NPT ½" ■ With iTHERM QuickNeck, terminal head TA30S	$IL = U+T-B+X$ $IL = U+E+T-B+X$ $IL = U+E+T-B+X$ $IL = U+E+T-B+X$
Base thickness B	Reduced tip Ø5.3 mm (0.21 in) x 20 mm (0.79 in)	2 mm (0.08 in)
	Tapered tip Ø 6.6 mm (0.26 in) x 60 mm (2.36 in)	
	Straight tip	

With thermowell diameter 12.7 mm (½ in)



A0018313

- 1 Thermometer with replaceable extension neck TE411 and process connection as clamp version
- 2 Process connection version as cylindrical weld-in adapter Ø12.7 mm (0.5 in)
- 3 Process connection version as spherical weld-in adapter Ø25 mm
- 4 Process connection version as sanitary connection according to DIN 11851
- 5 Thread according to ISO 228 for Liquiphant weld-in adapter
- 6 Process connection version Varivent®
- 7 Thermometer with quick-fastening iTHERM QuickNeck and process connection, as clamp version for example

- Replaceable extension neck or quick-fastening iTHERM QuickNeck
- G3/8" thread for thermowell connection
- Welded thermowell at the tip

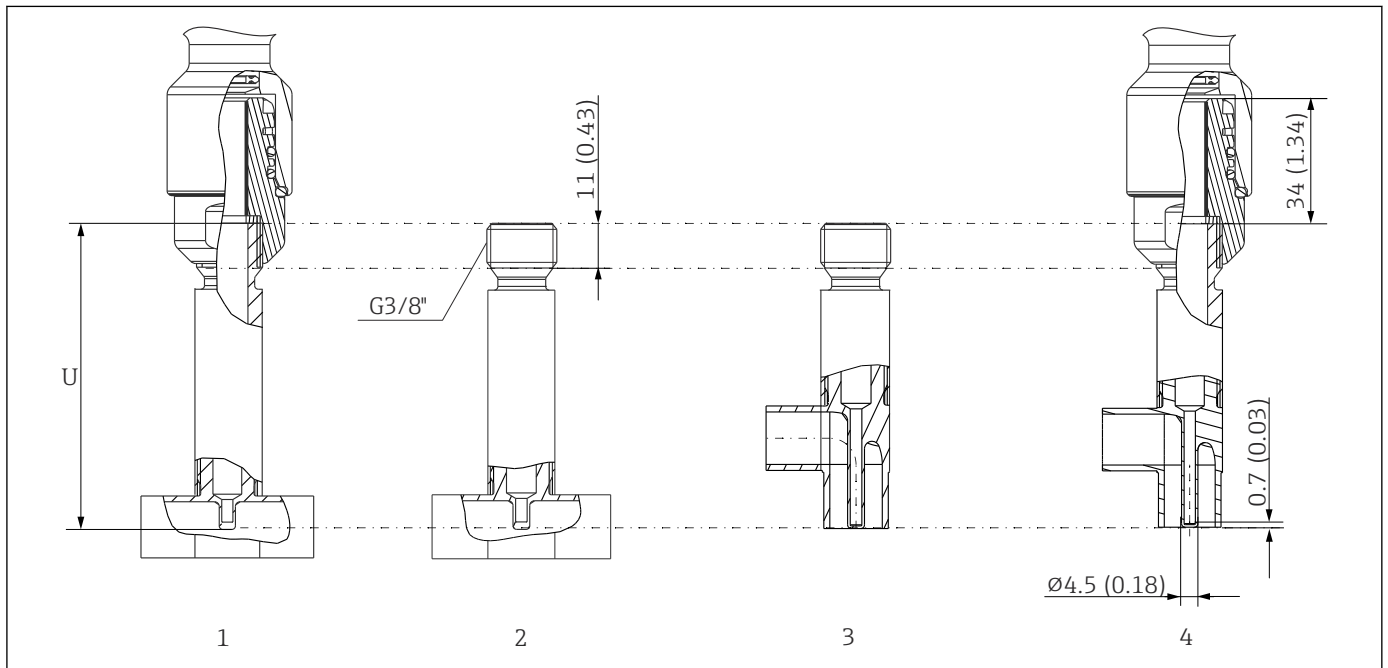
Item	Version	Length
Extension neck length E	Replaceable extension neck, Ø9 mm (0.35 in)	Variable, depending on the configuration
	iTHERM QuickNeck with thread M24x1.5 to terminal head, with option: ■ A0: E not required ■ X1: E= variable length	■ 60 mm (2.36 in) ■ Variable, depending on the configuration
	iTHERM QuickNeck with thread NPT ½" to terminal head, with option: A0: E not required	54 mm (2.13 in)
Length of thermowell lagging T	Weld-in adapter, cylindrical, Ø12.7 mm (0.5 in) ¹⁾	12 mm (0.47 in)
	All other process connections	65 mm (2.56 in)
Immersion length U	Independent of the process connection	Variable, depending on the configuration
Variable length X	■ With connection thread M24x1.5 ■ With connection thread ½" NPT ■ With terminal head TA30S Calculation of IL for the insert: IL = U+T+E-B+X	14 mm (0.55 in) 29 mm (1.14 in) 34 mm (1.34 in)
Base thickness B	Reduced tip Ø5.3 mm (0.21 in) x 20 mm (0.79 in)	2 mm (0.079 in)

Item	Version	Length
	Reduced tip $\varnothing 8$ mm (0.31 in) x 32 mm (1.26 in)	4 mm (0.16 in)
	Straight tip	6 mm (0.24 in)

1) See Fig. Version 2

Thermowell version as T-piece or elbow piece, optimized

No welds, no dead legs



A0036509

12 Thermowell as per DIN 11865 or ASME BPE

- 1 T-piece with threaded QuickNeck bottom part, torque 5 Nm (3.69 lbf ft), and glued with threadlocking adhesive
 - 2 T-piece with extension neck connection G3/8"
 - 3 Elbow piece with extension neck connection G3/8"
 - 4 Elbow piece with threaded QuickNeck bottom part, torque 5 Nm (3.69 lbf ft), and glued with threadlocking adhesive
- U Immersion length

- Pipe sizes as per DIN 11865 series A (DIN), B (ISO) and C (ASME BPE) → 43
- 3-A marked for nominal diameters $\geq$ DN25
- EHEDG certified for nominal diameters $\geq$ DN25
- ASME BPE compliance for nominal diameters $\geq$ DN25
- IP69K protection class
- 1.4435+316L material, delta ferrite content $< 0.5\%$
- Temperature range: -60 to $+200$ °C (-76 to $+392$ °F)
- Pressure range: PN25 as per DIN11865



Due to the short immersion length U in the case of small pipe diameters, the use of iTHERM QuickSens inserts is recommended.

As a general rule, the longer the immersion length U the better the accuracy. For small pipe diameters it is advisable to use elbow pieces to enable a maximum immersion length U.

Suitable immersion lengths for the following thermometers with G3/8" extension neck connection:

- Easytemp TMR35: 83 mm (3.27 in)
- iTHERM TM411: 85 mm (3.35 in)
- iTHERM TM311: 85 mm (3.35 in)
- TrustSens TM371: 85 mm (3.35 in)

Suitable immersion lengths for the following thermometers with QuickNeck connection:

- iTHERM TM411: 119 mm (4.7 in)
- TrustSens TM371: 119 mm (4.7 in)

Possible combinations of the thermowell versions with the available process connections and quick-fastening iTHERM QuickNeck

Process connection and size	Thermowell diameter			iTHERM QuickNeck for Ø9 mm (0.35 in) ¹⁾
	6 mm (¼ in)	9 mm (0.35 in)	12.7 mm (½ in)	
Without process connection (for installation with compression fitting)	☑	-	-	-
Weld-in adapter				
Cylindrical Ø12.7 mm (0.5 in)	-	-	☑	-
Cylindrical Ø30 x 40 mm	☑	☑	-	☑
Cylindrical Ø12 x 40 mm		-	-	-
Spherical-cylindrical Ø30 x 40 mm	☑	☑	-	☑
Spherical Ø25 mm (0.98 in)	☑	☑	☑	-
Clamp according to ISO 2852				
Microclamp/Tri-clamp DN18 (0.75 in)	☑ ²⁾	☑	-	☑
DN12 - 21.3			☑	
DN25 -38 (1 - 1.5 in)	☑	☑	☑	☑
DN40 - 51 (2 in)			☑	
DN63.5 (2.5 in)	-	☑	☑	☑
DN70 - 76.5 (3 in)				
Milk pipe connection according to DIN 11851				
DN25	☑	☑	☑	-
DN32, DN40				☑
DN50	-			
Aseptic pipe union according to DIN 11864-1 Form A				
DN25, DN40	-	☑	-	☑
Metal sealing system				
M12x1.5	☑	-	-	-
G½"		☑		☑
Thread according to ISO 228 for Liquiphant weld-in adapter				
G¾" for FTL20, FTL31, FTL33	-	☑	☑	-
G¾" for FTL50				-
G1" for FTL50				☑
APV Inline				
DN50	-	☑	-	☑
Varivent®				
Type B, Ø31 mm; Type F, Ø50 mm ; Type N, Ø68 mm	-	☑	☑	☑
Ingold connection				
25 x 30 mm or 25 x 46 mm	-	☑	-	☑
SMS 1147				
DN25, DN38, DN51	-	☑	-	☑
Neumo Biocontrol				
D25 PN16, D50 PN16, D65 PN16	-	☑	-	-

1) In the case of 6 mm (¼ in) and 12.7 mm (½ in) diameters, the iTHERM QuickNeck is available for all process connection versions.

2) Microclamp/Tri-clamp DN8 (0.5") only possible in conjunction with a thermowell diameter = 6 mm (¼ in)

Insert Depending on the application, iTHERM TS111 inserts with different RTD sensors are available for the thermometer:

Sensor	Standard thin-film	iTHERM StrongSens	iTHERM QuickSens ¹⁾	Wire wound	
Sensor design; connection method	1x Pt100, 3- or 4-wire, mineral insulated	1x Pt100, 3- or 4-wire, mineral insulated	1x Pt100, 3- or 4-wire ■ Ø6 mm (¼ in), mineral insulated ■ Ø3 mm (⅛ in), Teflon insulated	1x Pt100, 3- or 4- wire, mineral insulated	2x Pt100, 3-wire, mineral insulated
Vibration resistance of the insert tip	Up to 3g	Enhanced vibration resistance > 60g	■ Ø3 mm (⅛ in) up to 3g ■ Ø6 mm (¼ in) > 60g	Up to 3g	
Measuring range; accuracy class	–50 to +400 °C (–58 to +752 °F), Class A or AA	–50 to +500 °C (–58 to +932 °F), Class A or AA	–50 to +200 °C (–58 to +392 °F), Class A or AA	–200 to +600 °C (–328 to +1 112 °F), Class A or AA	
Diameter	3 mm (⅛ in), 6 mm (¼ in)	6 mm (¼ in)	3 mm (⅛ in), 6 mm (¼ in)		

1) Recommended for immersion lengths $U < 70$ mm (2.76 in)

The iTHERM TS111 insert is available as a spare part. The insertion length (IL) depends on the immersion length of the thermowell (U), the length of the extension neck (E), the thickness of the base (B), the length of the thermowell lagging (L) and the variable length (X). The insertion length (IL) must be taken into consideration when replacing the unit. Formulas for calculating IL →  21.



For more information on the deployed iTHERM TS111 insert with enhanced vibration resistance and fast-response sensor, see the Technical Information (TI01014T/09/).



Spare parts currently available for your product can be found online at: <https://www.endress.com/en/instrumentation-services>, product root: TM411. Always quote the serial number of the device when ordering spare parts! The insertion length IL is automatically calculated using the serial number.

Weight 0.5 to 2.5 kg (1 to 5.5 lbs) for standard options.

Material Extension neck and thermowell, insert, process connection.

The temperatures for continuous operation specified in the following table are only intended as reference values for use of the various materials in air and without any significant compressive load.

The maximum operating temperatures can be reduced considerably in cases where abnormal conditions such as high mechanical load occur or in aggressive media.

Designation	Short form	Recommended max. temperature for continuous use in air	Properties
AISI 316L (corresponds to 1.4404 or 1.4435)	X2CrNiMo17-13-2, X2CrNiMo18-14-3	650 °C (1 202 °F) ¹⁾	■ Austenitic, stainless steel ■ High corrosion resistance in general ■ Particularly high corrosion resistance in chlorine-based and acidic, non-oxidizing atmospheres through the addition of molybdenum (e.g. phosphoric and sulfuric acids, acetic and tartaric acids with a low concentration) ■ Increased resistance to intergranular corrosion and pitting ■ The wetted part in a protective tube is made of 316L or 1.4435+316L passivated with 3% sulfuric acid.
1.4435+316L, delta ferrite < 1% or < 0.5%	With regard to analytical limits, the specifications of both materials (1.4435 and 316L) are met simultaneously. In addition, the delta ferrite content of the wetted parts is limited to <1% or <0.5% ≤3% at weldings (following Basel Standard II)		

- 1) Can be used to a limited extent up to 800 °C (1472 °F) for low compressive loads and in non-corrosive media. Contact your Endress+Hauser sales team for further information.

Surface roughness

Values for wetted surfaces:

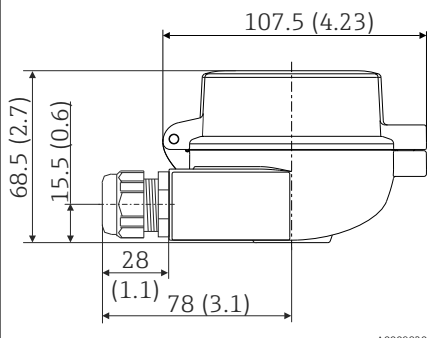
Standard surface, mechanically polished ¹⁾	$R_a \leq 0.76 \mu\text{m}$ (30 μin)
Mechanically polished ¹⁾ , buffed ²⁾	$R_a \leq 0.38 \mu\text{m}$ (15 μin)
Mechanically polished ¹⁾ , buffed and electropolished	$R_a \leq 0.38 \mu\text{m}$ (15 μin) + electropolished

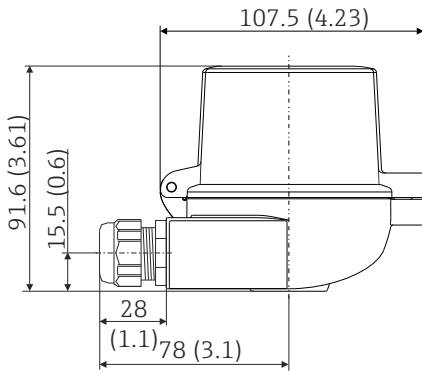
- 1) Or any other finishing method that meets the R_a max
 2) Not compliant with ASME BPE

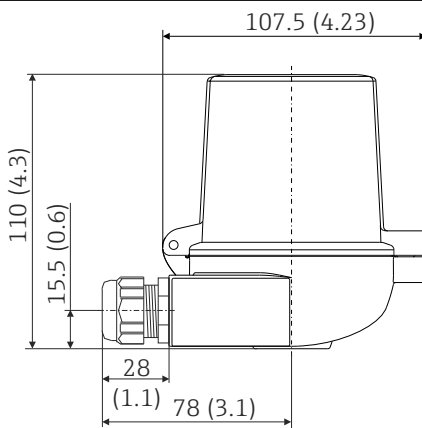
Terminal heads

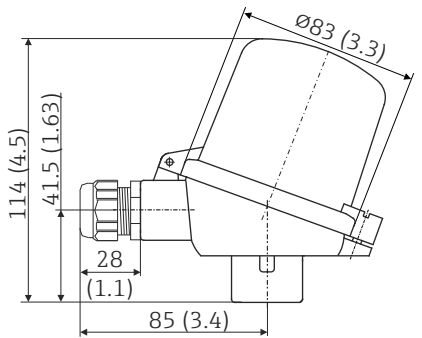
All terminal heads have an internal shape and size in accordance with DIN EN 50446, flat face and a thermometer connection with a M24x1.5 or ½" NPT thread. All dimensions in mm (in). The sample cable glands in the diagrams correspond to M20x1.5 connections with non-Ex polyamide cable glands. Specifications without head transmitter installed. For ambient temperatures with head transmitter installed, see the 'Environment' section. → 19

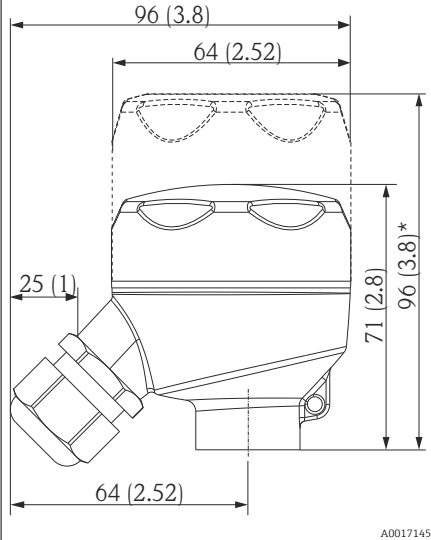
As a special feature, Endress+Hauser offers terminal heads with optimized terminal accessibility for easy installation and maintenance.

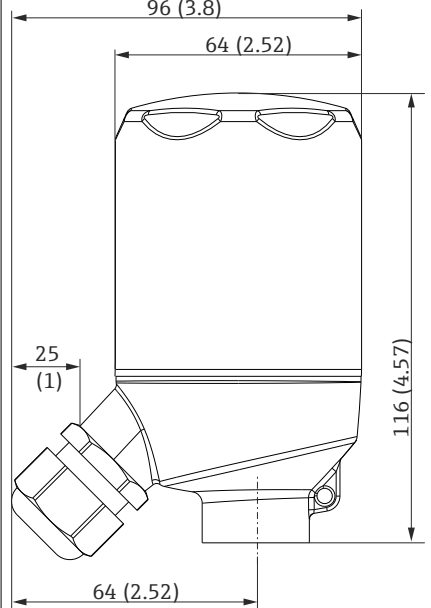
TA30A	Specification
	■ Degree of protection: ■ IP66/68 (NEMA Type 4x encl.) ■ For ATEX: IP66/67 ■ Temperature: -50 to +150 °C (-58 to +302 °F) without cable gland ■ Material: aluminum, polyester powder coated ■ Seals: silicone ■ Cable entry thread: G ½", ½" NPT and M20x1.5; ■ Protective fitting connection: M24x1.5 ■ Head color: blue, RAL 5012 ■ Cap color: gray, RAL 7035 ■ Weight: 330 g (11.64 oz) ■ Ground terminal, internal and external ■ Available with sensors with 3-A® symbol

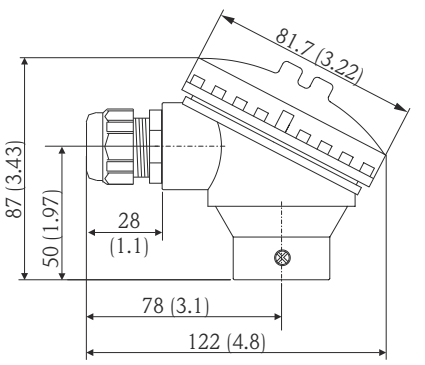
TA30A with display window in cover	Specification
 A0009821	■ Degree of protection: ■ IP66/68 (NEMA Type 4x incl.) ■ For ATEX: IP66/67 ■ Temperature: -50 to +150 °C (-58 to +302 °F) without cable gland ■ Material: aluminum, polyester powder coated ■ Seals: silicone ■ Cable entry thread: G ½", ½" NPT and M20x1.5 ■ Protective fitting connection: M24x1.5 ■ Head color: blue, RAL 5012 ■ Cap color: gray, RAL 7035 ■ Weight: 420 g (14.81 oz) ■ With TID10 display ■ Ground terminal, internal and external ■ Available with sensors with 3-A® symbol

TA30D	Specification
 A0009822	■ Degree of protection: ■ IP66/68 (NEMA Type 4x incl.) ■ For ATEX: IP66/67 ■ Temperature: -50 to +150 °C (-58 to +302 °F) without cable gland ■ Material: aluminum, polyester powder coated ■ Seals: silicone ■ Cable entry thread: G ½", ½" NPT and M20x1.5 ■ Protective fitting connection: M24x1.5 ■ Two head transmitters can be mounted. In the standard configuration one transmitter is mounted in the terminal head cover and an additional terminal block is installed directly on the insert. ■ Head color: blue, RAL 5012 ■ Cap color: gray, RAL 7035 ■ Weight: 390 g (13.75 oz) ■ Ground terminal, internal and external ■ Available with sensors with 3-A® symbol

TA30P	Specification
 A0023477	■ Degree of protection: IP65 ■ Max. temperature: -40 to +120 °C (-40 to +248 °F) ■ Material: polyamide (PA12), antistatic ■ Seals: silicone ■ Threaded cable entry: M20x1.5 ■ Protective fitting connection: M24x1.5 ■ Two head transmitters can be mounted. In the standard configuration one transmitter is mounted in the terminal head cover and an additional terminal block is installed directly on the insert. ■ Head and cap color: black ■ Weight: 135 g (4.8 oz) ■ Type of protection: intrinsic safety (G Ex ia) ■ Ground terminal: only internal via auxiliary terminal ■ Available with sensors with 3-A® symbol

TA30R (optionally with display window in cover)	Specification
 A0017145 * Dimensions of version with display window in cover	■ Degree of protection - standard version: IP69K (NEMA Type 4x incl.) Degree of protection - version with display window: IP66/68 (NEMA Type 4x incl.) ■ Temperature: -50 to +130 °C (-58 to +266 °F) without cable gland ■ Material: stainless steel 316L, abrasive-blasted or polished Seals: silicone, optional EPDM for applications free from paint-wetting impairment substances Display window: polycarbonate (PC) ■ Cable entry thread ½" NPT and M20x1.5 ■ Weight ■ Standard version: 360 g (12.7 oz) ■ Version with display window: 460 g (16.23 oz) ■ Display window in cover optionally for head transmitter with display TID10 ■ Protection armature connection: M24x1.5 or ½" NPT ■ Ground terminal: internal as standard ■ Available with 3-A marked sensors

TA30R (high version for two transmitters)	Specification
 A0034644	■ Degree of protection: IP69K (NEMA Type 4x incl.) ■ Temperature: -50 to +130 °C (-58 to +266 °F) without cable gland ■ Material: stainless steel 316L, abrasive-blasted or polished Seals: EPDM ■ Cable entry thread ½" NPT and M20x1.5 ■ Weight: 460 g (16.23 oz) ■ For two head transmitter ■ Protection armature connection: M24x1.5 or ½" NPT ■ Ground terminal: internal in standard version ■ Not allowed for Class II and III applications ■ Available with 3-A marked sensors

TA30S	Specification
	■ Degree of protection: IP65 (NEMA Type 4x encl.) ■ Temperature: -40 to +85 °C (-40 to +185 °F) without cable gland ■ Material: polypropylene (PP), FDA-compliant, seals: O-ring EPDM ■ Cable entry thread: 3/4" NPT (with adapter for 1/2" NPT), M20x1.5 ■ Protective assembly connection: 1/2" NPT ■ Color: white ■ Weight: approx. 100 g (3.5 oz) ■ Ground terminal: only internal via auxiliary terminal ■ Not allowed for Class II and III applications ■ Available with 3-A marked sensors

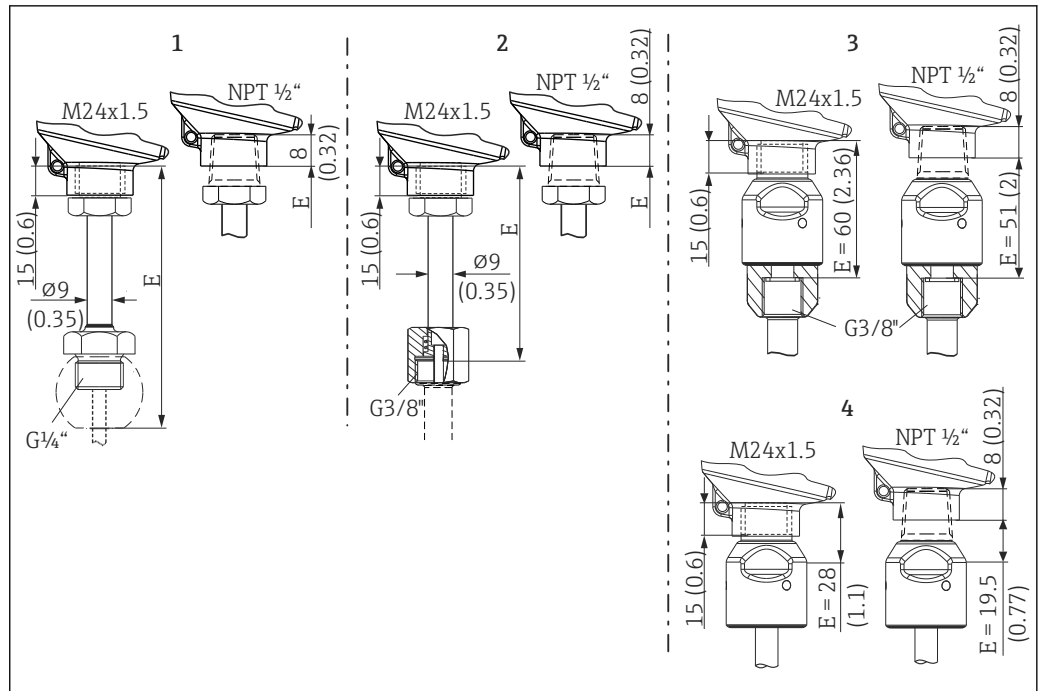
Cable glands and fieldbus connectors

Type	Suitable for cable entry	Degree of protection	Temperature range
Cable gland, polyamide	1/2" NPT, 3/4" NPT, M20x1.5 (optionally 2x cable entry)	IP68	-40 to +100 °C (-40 to +212 °F)
	1/2" NPT, M20x1.5 (optionally 2x cable entry)	IP69K	-20 to +95 °C (-4 to +203 °F)
Cable gland for dust ignition-proof area, polyamide	1/2" NPT, M20x1.5	IP68	-20 to +95 °C (-4 to +203 °F)
Cable gland for dust ignition-proof area, brass	M20x1.5	IP68 (NEMA Type 4x)	-20 to +130 °C (-4 to +266 °F)
Fieldbus connector (M12x1 PA, 7/8" PA, FF)	1/2" NPT, M20x1.5	IP67, NEMA Type 6	-40 to +105 °C (-40 to +221 °F)
Fieldbus connector (M12, 8-pin)	M20x1.5	IP67	-30 to +90 °C (-22 to +194 °F)

Extension neck

Standard version of extension neck, or optionally with quick-fastening iTHERM QuickNeck.

- Tool-free removal of the insert:
 - Saves time/costs on frequently calibrated measuring points
 - Wiring mistakes avoided
- IP69K protection class



13 Dimensions of extension neck type TE411, different versions, each with M24x1.5 or NPT 1/2" thread to the terminal head

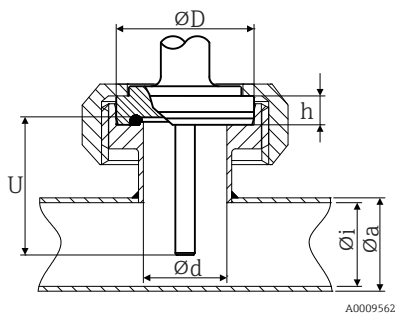
- 1 With G1/4" male thread for compression fitting TK40, → 46 3-A marked
- 2 With G3/8" union nut for thermowell version: Ø6 mm (1/4 in), Ø12.7 mm (0.5 in) and T-piece and elbow piece thermowell versions
- 3 Quick-fastening iTHERM QuickNeck for thermowell version: Ø6 mm (1/4 in), Ø12.7 mm (0.5 in) and T-piece and elbow piece thermowell versions
- 4 Quick-fastening iTHERM QuickNeck - top part, for installation in an existing thermowell with iTHERM QuickNeck

Thermowell

Process connections

All dimensions in mm (in).

Type	Version	Dimensions					Technical properties
		ϕd	ϕD	ϕi	ϕa	h	
Aseptic pipe union according to DIN 11864-1, Form A	DN25	26 mm (1.02 in)	42.9 mm (1.7 in)	26 mm (1.02 in)	29 mm (1.14 in)	9 mm (0.35 in)	■ $P_{\max.} = 40$ bar (580 psi) ■ 3-A marked and EHEDG certified ■ ASME BPE compliance
	DN40	38 mm (1.5 in)	54.9 mm (2.16 in)	38 mm (1.5 in)	41 mm (1.61 in)	10 mm (0.39 in)	

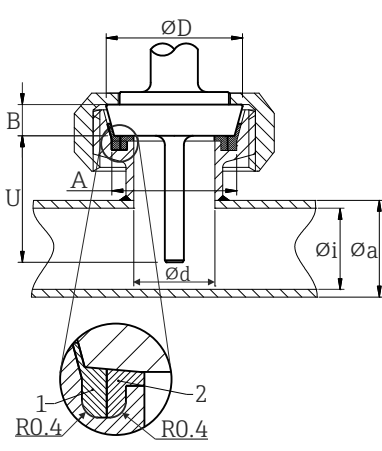


For welding in

Type	Version	Dimensions	Technical properties
Weld-in adapter 	1: Cylindrical ¹⁾	$\phi d = 12.7$ mm ($\frac{1}{2}$ in), U = immersion length from lower edge of thread, T = 12 mm (0.47 in)	■ $P_{\max.}$ depends on the weld-in process ■ 3-A marked and EHEDG certified ■ ASME BPE compliance
	2: Cylindrical ²⁾	$\phi d \times h = 12$ mm (0.47 in) x 40 mm (1.57 in), T = 55 mm (2.17 in)	
	3: Cylindrical	$\phi d \times h = 30$ mm (1.18 in) x 40 mm (1.57 in)	
	4: Spherical-cylindrical	$\phi d \times h = 30$ mm (1.18 in) x 40 mm (1.57 in)	
	5: Spherical	$\phi d = 25$ mm (0.98 in) h = 24 mm (0.94 in)	

1) For protection pipe $\phi 12.7$ mm ($\frac{1}{2}$ in)2) For protection pipe $\phi 6$ mm ($\frac{1}{4}$ in)

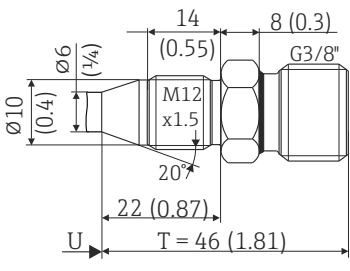
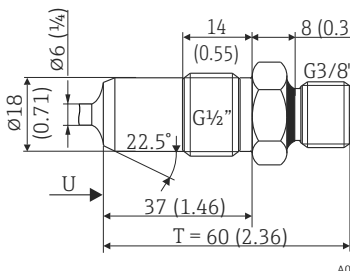
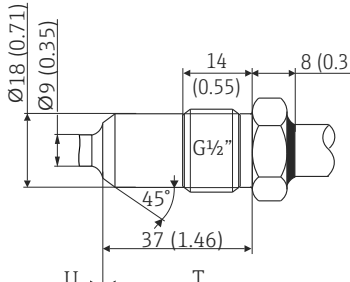
Releasable process connection


Type						Technical properties
Sanitary connection according to DIN 11851  1 Centering ring 2 Sealing ring A0009561 ■ 3-A marked and EHEDG certified (only with EHEDG-certified and self-centering sealing ring). ■ ASME BPE compliance						
Version ¹⁾	Dimensions					P _{max.}
	ØD	A	B	Øi	Øa	
DN25	44 mm (1.73 in)	30 mm (1.18 in)	10 mm (0.39 in)	26 mm (1.02 in)	29 mm (1.14 in)	40 bar (580 psi)
DN32	50 mm (1.97 in)	36 mm (1.42 in)	10 mm (0.39 in)	32 mm (1.26 in)	35 mm (1.38 in)	40 bar (580 psi)
DN40	56 mm (2.2 in)	42 mm (1.65 in)	10 mm (0.39 in)	38 mm (1.5 in)	41 mm (1.61 in)	40 bar (580 psi)
DN50	68 mm (2.68 in)	54 mm (2.13 in)	11 mm (0.43 in)	50 mm (1.97 in)	53 mm (2.1 in)	25 bar (363 psi)


1) Pipes in accordance with DIN 11850


Type	Version	Dimensions		Technical properties	Conformity
	ϕd ¹⁾	ϕD	ϕa		
Clamp according to ISO 2852 Form A Form B Form A: In compliance with ASME BPE Type A Form B: In compliance with ASME BPE Type B and ISO 2852 A0009566	Microclamp ²⁾ DN8-18 (0.5"-0.75") ³⁾ , Form A	25 mm (0.98 in)	-	■ $P_{max.} = 16$ bar (232 psi), depends on clamp ring and suitable seal ■ 3-A marked	-
	Tri-clamp DN8-18 (0.5"-0.75") ³⁾ , Form B		-		Based on ISO 2852 ⁴⁾
	Clamp DN12-21.3, Form B	34 mm (1.34 in)	16 to 25.3 mm (0.63 to 0.99 in)		ISO 2852
	Clamp DN25-38 (1"-1.5"), Form B	50.5 mm (1.99 in)	29 to 42.4 mm (1.14 to 1.67 in)	■ $P_{max.} = 16$ bar (232 psi), depends on clamp ring and suitable seal ■ 3-A marked and EHEDG certified (in connection with Combifit seal) ■ Can be used with "Novaseptic Connect (NA Connect)" which enables flush-mount installation	ASME BPE Type B; ISO 2852
	Clamp DN40-51 (2"), Form B	64 mm (2.52 in)	44.8 to 55.8 mm (1.76 to 2.2 in)		ASME BPE Type B; ISO 2852
	Clamp DN63.5 (2.5"), Form B	77.5 mm (3.05 in)	68.9 to 75.8 mm (2.71 to 2.98 in)		ASME BPE Type B; ISO 2852
	Clamp DN70-76.5 (3"), Form B	91 mm (3.58 in)	> 75.8 mm (2.98 in)		ASME BPE Type B; ISO 2852

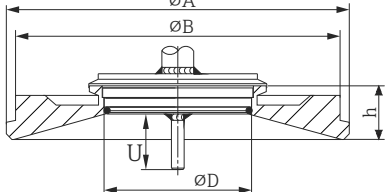
- 1) Pipes in accordance with ISO 2037 and BS 4825 Part 1
- 2) Microclamp (not in ISO 2852); no standard pipes
- 3) DN8 (0.5") only possible with protection pipe diameter = 6 mm (¼ in)
- 4) Groove diameter = 20 mm

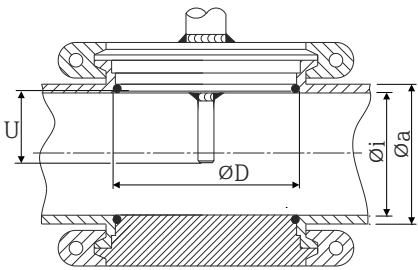
Type	Version	Technical properties
Metal sealing system		
M12x1.5  A0009574	G½"  A0020856	Protection pipe diameter 6 mm (¼ in) P _{max.} = 16 bar (232 psi)  Maximum torque = 10 Nm (7.38 lbf ft)
-	 A0009571	Protection pipe diameter 9 mm (0.35 in) P _{max.} = 16 bar (232 psi)  Maximum torque = 10 Nm (7.38 lbf ft)

Type	Version	Technical properties
Process adapter  A0034881	D45	-

Type	Version G	Dimensions			Technical properties
		L1 thread length	A	1 (SW/AF)	
Thread according to ISO 228 (for Liquiphant weld-in adapter)  A0009572	G¾" for FTL20/31/33 adapter	16 mm (0.63 in)	25.5 mm (1 in)	32	- P_{max.} = 25 bar (362 psi) at max. 150 °C (302 °F) - P_{max.} = 40 bar (580 psi) at max. 100 °C (212 °F) - Information about hygienic compliance in connection with FTL31/33/50 adapter see TI00426F
	G¾" for FTL50 adapter				
	G1" for FTL50 adapter	18.6 mm (0.73 in)	29.5 mm (1.16 in)	41	

Type	Version	Dimensions					Technical properties
		ϕd	ϕA	ϕB	M	h	
APV Inline  A0018435	DN50	69 mm (2.72 in)	99.5 mm (3.92 in)	82 mm (3.23 in)	2xM8	19 mm (0.75 in)	■ $P_{max.} = 25 \text{ bar (362 psi)}$ ■ 3-A marked and EHEDG certified ■ ASME BPE compliance

Type	Version	Dimensions				Technical properties	
		ØD	ØA	ØB	h	P _{max.}	
Varivent®  A0021307	Type B	31 mm (1.22 in)	105 mm (4.13 in)	-	22 mm (0.87 in)	10 bar (145 psi)	■ 3-A marked and EHEDG certified ■ ASME BPE compliance
	Type F	50 mm (1.97 in)	145 mm (5.71 in)	135 mm (5.31 in)	24 mm (0.95 in)		
	Type N	68 mm (2.67 in)	165 mm (6.5 in)	155 mm (6.1 in)	24.5 mm (0.96 in)		
 The VARINLINE® housing connection flange is suitable for welding into the conical or torispherical head in tanks or containers with a small diameter (≤ 1.6 m (5.25 ft)) and up to a wall thickness of 8 mm (0.31 in).							

Type	Technical properties
Varivent® for VARINLINE® housing for installation in pipes  A0009564	■ 3-A marked and EHEDG certified ■ ASME BPE compliance

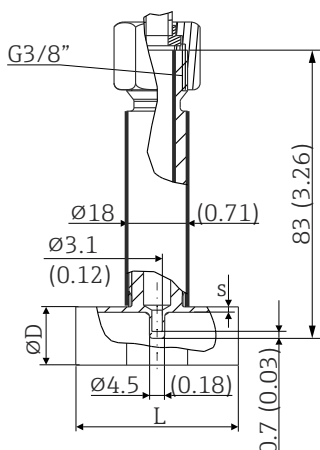
Version	Dimensions			$P_{max.}$
	ϕD	ϕi	ϕa	
Type N, according to DIN 11866, series A	68 mm (2.67 in)	DN40: 38 mm (1.5 in)	DN40: 41 mm (1.61 in)	DN40 to DN65: 16 bar (232 psi)
		DN50: 50 mm (1.97 in)	DN50: 53 mm (2.1 in)	
		DN65: 66 mm (2.6 in)	DN65: 70 mm (2.76 in)	
		DN80: 81 mm (3.2 in)	DN80: 85 mm (3.35 in)	DN80 to DN150: 10 bar (145 psi)
		DN100: 100 mm (3.94 in)	DN100: 104 mm (4.1 in)	
		DN125: 125 mm (4.92 in)	DN125: 129 mm (5.08 in)	
Type N, according to EN ISO 1127, series B	68 mm (2.67 in)	38.4 mm (1.51 in)	42.4 mm (1.67 in)	42.4 mm (1.67 in) to 60.3 mm (2.37 in): 16 bar (232 psi)
		44.3 mm (1.75 in)	48.3 mm (1.9 in)	

Type				Technical properties
		56.3 mm (2.22 in)	60.3 mm (2.37 in)	76.1 mm (3 in) to 114.3 mm (4.5 in): 10 bar (145 psi)
		72.1 mm (2.84 in)	76.1 mm (3 in)	
		82.9 mm (3.26 in)	42.4 mm (3.5 in)	
		108.3 mm (4.26 in)	114.3 mm (4.5 in)	
Type N, according to DIN 11866, series C	68 mm (2.67 in)	OD 1½": 34.9 mm (1.37 in)	OD 1½": 38.1 mm (1.5 in)	OD 1½" to OD 2½": 16 bar (232 psi)
		OD 2": 47.2 mm (1.86 in)	OD 2": 50.8 mm (2 in)	
		OD 2½": 60.2 mm (2.37 in)	OD 2½": 63.5 mm (2.5 in)	
Type N, according to DIN 11866, series C	68 mm (2.67 in)	OD 3": 73 mm (2.87 in)	OD 3": 76.2 mm (3 in)	OD 3" to OD 4": 10 bar (145 psi)
		OD 4": 97.6 mm (3.84 in)	OD 4": 101.6 mm (4 in)	



Due to the short immersion length U, the use of iTHERM QuickSens inserts is recommended.

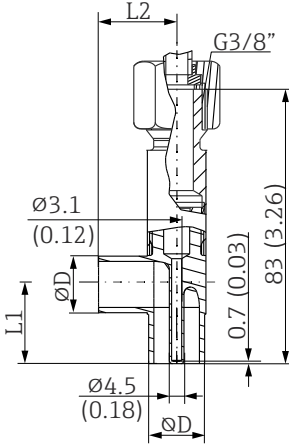
T-piece, optimized (no welding, no dead legs)

Type	Version		Dimensions in mm (in)			Technical properties	
			ØD	L	s ¹⁾		
T-piece for weld-in as per DIN 11865 (series A, B and C) 	Series A	DN10 PN25	13 mm (0.51 in)	48 mm (1.89 in)	1.5 mm (0.06 in)	■ P_{max.} = 25 bar (362 psi) ■ 3-A marked²⁾ and EHEDG certified²⁾ ■ ASME BPE compliance²⁾	
		DN15 PN25	19 mm (0.75 in)				
		DN20 PN25	23 mm (0.91 in)				
		DN25 PN25	29 mm (1.14 in)				
		DN32 PN25	32 mm (1.26 in)				
	Series B	DN13.5 PN25	13.5 mm (0.53 in)		1.6 mm (0.063 in)		
		DN17.2 PN25	17.2 mm (0.68 in)				
		DN21.3 PN25	21.3 mm (0.84 in)				
		DN26.9 PN25	26.9 mm (1.06 in)		2 mm (0.08 in)		
		DN33.7 PN25	33.7 mm (1.33 in)				
	Series C	DN12.7 PN25 (½")	12.7 mm (0.5 in)		1.65 mm (0.065 in)		
		DN19.05 PN25 (¾")	19.05 mm (0.75 in)				
		DN25.4 PN25 (1")	25.4 mm (1 in)				
		DN38.1 PN25 (1½")	38.1 mm (1.5 in)				

1) Wall thickness

2) Applies to ≥ DN25. The radius ≥ 3.2 mm (⅛ in) cannot be maintained for smaller nominal diameters.


Elbow piece, optimized (no welding, no dead legs)

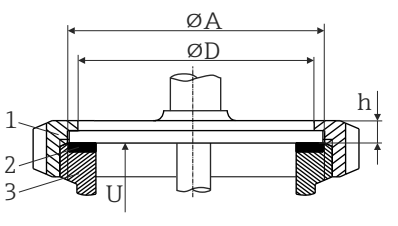
Type	Version		Dimensions				Technical properties
			ØD	L1	L2	s ¹⁾	
Elbow piece for weld-in as per DIN 11865 (series A, B and C)  A0035899	Series A	DN10 PN25	13 mm (0.51 in)	24 mm (0.95 in)	1.5 mm (0.06 in)	■ P_{max.} = 25 bar (362 psi) ■ 3-A marked²⁾ and EHEDG certified²⁾ ■ ASME BPE compliance²⁾	
		DN15 PN25	19 mm (0.75 in)	25 mm (0.98 in)			
		DN20 PN25	23 mm (0.91 in)	27 mm (1.06 in)			
		DN25 PN25	29 mm (1.14 in)	30 mm (1.18 in)			
		DN32 PN25	35 mm (1.38 in)	33 mm (1.3 in)			
	Series B	DN13.5 PN25	13.5 mm (0.53 in)	32 mm (1.26 in)	1.6 mm (0.063 in)		
		DN17.2 PN25	17.2 mm (0.68 in)	34 mm (1.34 in)			
		DN21.3 PN25	21.3 mm (0.84 in)	36 mm (1.41 in)			
		DN26.9 PN25	26.9 mm (1.06 in)	29 mm (1.14 in)			
		DN33.7 PN25	33.7 mm (1.33 in)	32 mm (1.26 in)	2.0 mm (0.08 in)		
	Series C	DN12.7 PN25 (½")	12.7 mm (0.5 in)	24 mm (0.95 in)	1.65 mm (0.065 in)		
		DN19.05 PN25 (¾")	19.05 mm (0.75 in)	25 mm (0.98 in)			
		DN25.4 PN25 (1")	25.4 mm (1 in)	28 mm (1.1 in)			
		DN38.1 PN25 (1½")	38.1 mm (1.5 in)	35 mm (1.38 in)			

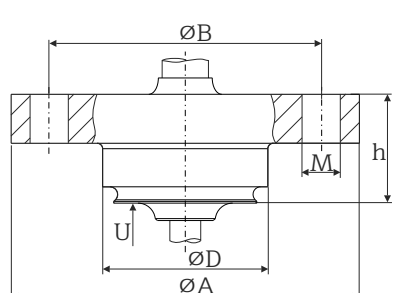
1) Wall thickness

2) Applies to ≥ DN25. The radius ≥ 3.2 mm (⅛ in) cannot be maintained for smaller nominal diameters.

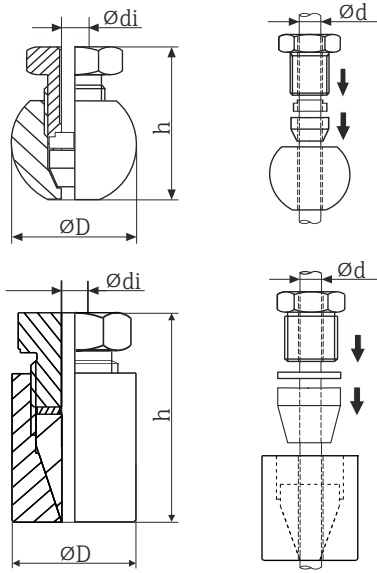
 Due to the short immersion length U, the use of iTHERM QuickSens inserts is generally recommended for T-piece/elbow piece process connections according to DIN 11865.

Type	Version, dimensions ØD x h	Technical properties
Ingold connection 	Ø25 mm (0.98 in) x 30 mm (1.18 in) x = 1.5 mm (0.06 in)	P _{max.} = 25 bar (362 psi) A seal is included in the scope of delivery. V75SR material: Complies with FDA, 3-A Sanitary Standard 18-03 Class 1 and USP Class VI
	Ø25 mm (0.98 in) x 46 mm (1.81 in) x = 6 mm (0.24 in)	

Type	Version	Dimensions			Technical properties
		ϕD	ϕA	h	
SMS 1147  1 Coupling nut 2 Sealing ring 3 Counterpart connection A0009568	DN25	32 mm (1.26 in)	35.5 mm (1.4 in)	7 mm (0.28 in)	P _{max.} = 6 bar (87 psi)
	DN38	48 mm (1.89 in)	55 mm (2.17 in)	8 mm (0.31 in)	
	DN51	60 mm (2.36 in)	65 mm (2.56 in)	9 mm (0.35 in)	
 The counterpart connection must fit the sealing ring and fix it in place.					

Type	Version	Dimensions					Technical properties
		ΦA	ΦB	ΦD	Φd	h	
Neumo Biocontrol  A0018497	D25 PN16	64 mm (2.52 in)	50 mm (1.97 in)	30.4 mm (1.2 in)	7 mm (0.28 in)	20 mm (0.79 in)	■ P_{max.} = 16 bar (232 psi) ■ 3-A marked
	D50 PN16	90 mm (3.54 in)	70 mm (2.76 in)	49.9 mm (1.97 in)	9 mm (0.35 in)	27 mm (1.06 in)	
	D65 PN25	120 mm (4.72 in)	95 mm (3.74 in)	67.9 mm (2.67 in)	11 mm (0.43 in)		

Compression fitting

Type	Version	Dimensions			Technical properties ¹⁾
	Spherical or cylindrical	Ødi	ØD	h	
Compression fitting TK40 for weld-in 	Spherical Material of sealing taper PEEK or 316L Thread G $\frac{1}{4}$ "	6.3 mm (0.25 in) ²⁾	25 mm (0.98 in)	33 mm (1.3 in)	■ P_{max.} = 10 bar (145 psi), T_{max.} = +150 °C (+302 °F) for PEEK material, tightening torque = 10 Nm ■ P_{max.} = 50 bar (725 psi), T_{max.} = +200 °C (+392 °F) for 316L material, tightening torque = 25 Nm ■ PEEK compression fitting is EHEDG tested, 3-A marked
	Cylindrical Material of sealing taper ELASTOSIL® Thread G $\frac{1}{2}$ "	6.2 mm (0.24 in) ²⁾ 9.2 mm (0.36 in)	30 mm (1.18 in)	57 mm (2.24 in)	■ P_{max.} = 10 bar (145 psi) ■ T_{max.} for ELASTOSIL® sealing taper = +200 °C (+392 °F), tightening torque = 5 Nm ■ The Elastosil® compression fitting is EHEDG tested and 3-A marked

1) All the pressure specifications apply for cyclic temperature load

2) For insert or protection pipe diameter Ød = 6 mm (0.236 in).

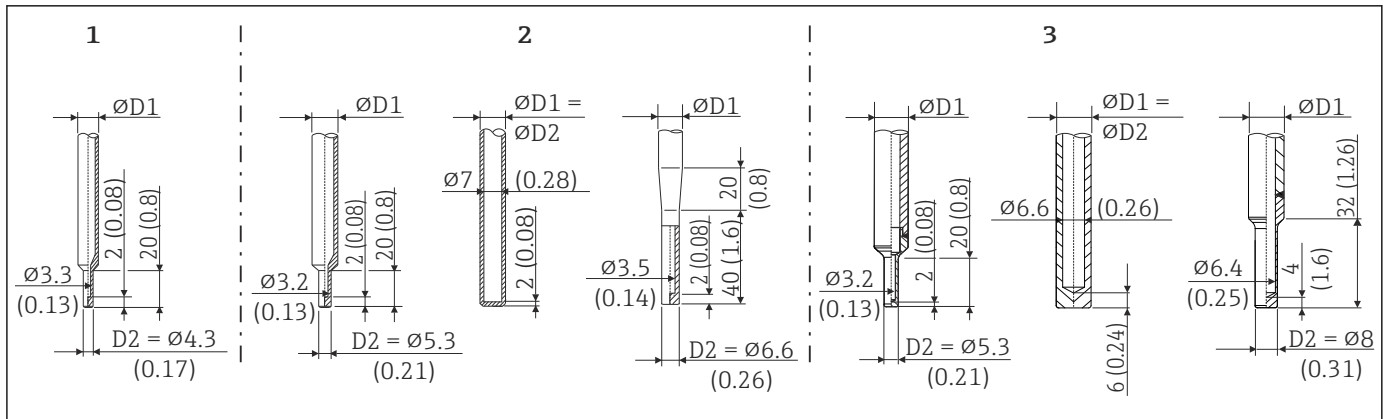
i The 316L compression fittings can only be used once due to deformation. This applies to all the components of the compression fittings! A replacement compression fitting must be attached in a different position (grooves in the protection pipe). PEEK compression fittings must never be used at a temperature that is lower than the temperature present when the compression fitting is secured. This is because the fitting would no longer be leak-tight as a result of heat contraction of the PEEK material.

SWAGELOCK or similar fittings are strongly recommended for higher requirements.

Tip shape

The thermal response time, the reduction of the flow cross-section and the mechanical load that occurs in the process are the criteria that matter when selecting the shape of the tip. Advantages of using reduced or tapered thermometer tips:

- A smaller tip shape has less impact on the flow characteristics of the pipe carrying the medium.
- The flow characteristics are optimized, thereby increasing the stability of the thermowell.
- Endress+Hauser offers users a range of thermowell tips to meet every requirement:
 - Reduced tip with Ø4.3 mm (0.17 in) and Ø5.3 mm (0.21 in): walls of lower thickness significantly reduce the response times of the overall measuring point.
 - Tapered tip with Ø6.6 mm (0.26 in) and reduced tip with Ø8 mm (0.31 in): walls of greater thickness are particularly well suited to applications with a higher degree of mechanical load or wear (e.g. pitting, abrasion etc.).



A0017174

14 Thermowell tips available (reduced, straight or tapered)

Item No.	Thermowell (ØD1)	Insert (ØID)
1	Ø6 mm (¼ in)	Reduced tip Ø3 mm (⅛ in)
2	Ø9 mm (0.35 in)	- Reduced tip with Ø5.3 mm (0.21 in) - Straight tip - Tapered tip with Ø6.6 mm (0.26 in)
3	Ø12.7 mm (½ in)	- Reduced tip with Ø5.3 mm (0.21 in) - Straight tip - Reduced tip with Ø8 mm (0.31 in)

i It is possible to check the mechanical loading capacity as a function of the installation and process conditions online in the TW Sizing Module for thermowells in the Endress+Hauser Applicator software. See "Accessories" section.

Certificates and approvals

Current certificates and approvals that are available for the product can be selected via the Product Configurator at www.endress.com:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.

Hygiene standard

- EHEDG certification, type EL CLASS I. EHEDG certified/tested process connections. → 38
- 3-A authorization no. 1144, 3-A Sanitary Standard 74-07. Listed process connections. → 38
- ASME BPE, certificate of conformity can be ordered for indicated options
- FDA-compliant
- All surfaces in contact with the medium are free of animal derived ingredients (ADI/TSE) and do not contain any materials derived from bovine or animal sources.

Materials in contact with food/product (FCM)

- The materials of the thermometer in contact with food/product (FCM) comply with the following European regulations:
- (EC) No. 1935/2004, Article 3, paragraph 1, Articles 5 and 17 on materials and articles intended to come into contact with food.
 - (EC) No. 2023/2006 on good manufacturing practice for materials and articles intended to come into contact with food.
 - (EU) No. 10/2011 on plastic materials and articles intended to come into contact with food.

CRN approval

The CRN approval is only available for certain thermowell versions. These versions are identified and displayed accordingly during the configuration of the device.

Detailed ordering information is available for your nearest sales organization www.addresses.endress.com or in the Download Area under www.endress.com :

1. Select the country
2. Select Downloads
3. In the search area: select Approvals/approval type
4. Enter the product code or device
5. Start the search

Surface cleanliness

- Free from oil and grease for O₂ applications, optional
- PWIS-free (PWIS = paint-wetting impairment substances as per DIL0301), optional

Material resistance

Material resistance (including housing) to the following cleaning agents/disinfectants from the company Ecolab: P3-topax 66, P3-topactive 200, P3-topactive 500 and P3-topactive OKTO as well as demineralized water.

Ordering information

Detailed ordering information is available for your nearest sales organization www.addresses.endress.com or in the Product Configurator under www.endress.com :

1. Click Corporate
2. Select the country
3. Click Products
4. Select the product using the filters and search field
5. Open the product page

The Configuration button to the right of the product image opens the Product Configurator.



Product Configurator - the tool for individual product configuration


- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

Accessories

Various accessories, which can be ordered with the device or subsequently from Endress+Hauser, are available for the device. Detailed information on the order code in question is available from your local Endress+Hauser sales center or on the product page of the Endress+Hauser website: www.endress.com.

Device-specific accessories







Accessories	Description
Welding boss with sealing taper (metal - metal) A0006621 A0018236	Welding boss for G$\frac{1}{2}$" and M12x1 thread Metal-sealing; conical Material of wetted parts: 316L/1.4435 Max. process pressure 16 bar (232 PSI) Order number: ■ 71424800 (G$\frac{1}{2}$") ■ 71405560 (M12x1)
Dummy plug A0045726 1 Size across flats SW22	Dummy plug for G$\frac{1}{2}$" or M12x1 conical metal-sealing welding boss Material: SS 316L/1.4435 Order number: ■ 60022519 (G$\frac{1}{2}$") ■ 60021194 (M12x1)
Weld-in adapter for Ingold process connection (OD25 mm (0.98 in)x46 mm (1.81 in) A0008956	Material of wetted parts: 316L/1.4435 Weight: 0.32 kg (0.7 lb) Adapter for Ingold process connection with 3.1 material certificate, order number: 71531585 Adapter for Ingold process connection, order number: 71531588 O-ring seal set ■ Silicone O-ring in accordance with FDA CFR 21 ■ Maximum temperature: 230 °C (446 °F) ■ Order number: 60018911

Flexible handle cap to cover the QuickNeck bottom part  A0027201	Diameter ØD: 24 to 26 mm (0.94 to 1.02 in) Material: Thermoplastic polyolefin - elastomer (TPE), free from plasticizers Maximum temperature: +150 °C (+302 °F) Order number: 71275424
--	--

Weld-in adapter



For more information about order codes and hygienic compliance of the adapters and spare parts, see Technical Information (TI00426F).

Weld-in adapter	 A0008246	 A0008251	 A0008256	 A0011924	 A0008248	 A0008253
	G 3/4", d=29 for pipe-mounting	G 3/4", d=50 for vessel-mounting	G 3/4", d=55 with flange	G 1", d=53 without flange	G 1", d=60 with flange	G 1" adjustable
Material	316L (1.4435)	316L (1.4435)	316L (1.4435)	316L (1.4435)	316L (1.4435)	316L (1.4435)
Roughness μm (μin) process side	≤ 1.5 (59.1)	≤ 0.8 (31.5)	≤ 0.8 (31.5)	≤ 0.8 (31.5)	≤ 0.8 (31.5)	≤ 0.8 (31.5)



Maximum process pressure for the weld-in adapters:

- 25 bar (362 PSI) at maximum 150 °C (302 °F)
- 40 bar (580 PSI) at maximum 100 °C (212 °F)

Communication-specific accessories

Configuration kit TXU10	Configuration kit for PC-programmable transmitter with setup software and interface cable for PC with USB port Order code: TXU10-xx
Commubox FXA195 HART	For intrinsically safe HART communication with FieldCare via the USB port.  For details, see "Technical Information" TI00404F
Wireless HART adapter SWA70	Is used for the wireless connection of field devices. The WirelessHART adapter can be easily integrated into field devices and existing infrastructures, offers data protection and transmission safety and can be operated in parallel with other wireless networks with minimum cabling complexity.  For details, see Operating Instructions BA061S

Fieldgate FXA320	Gateway for the remote monitoring of connected 4-20 mA measuring devices via a Web browser.  For details, see "Technical Information" TI00025S and Operating Instructions BA00053S
------------------	---

Service-specific accessories

Accessories	Description
Applicator	Software for selecting and sizing Endress+Hauser measuring devices: ■ Calculation of all the necessary data for identifying the optimum measuring device: e.g. pressure loss, accuracy or process connections. ■ Graphic illustration of the calculation results Administration, documentation and access to all project-related data and parameters over the entire life cycle of a project. Applicator is available: Via the Internet: https://portal.endress.com/webapp/applicator
Accessories	Description
Configurator	Product Configurator - the tool for individual product configuration ■ Up-to-the-minute configuration data ■ Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language ■ Automatic verification of exclusion criteria ■ Automatic creation of the order code and its breakdown in PDF or Excel output format ■ Ability to order directly in the Endress+Hauser Online Shop The Configurator is available on the Endress+Hauser website at: www.endress.com -> Click "Corporate" -> Select your country -> Click "Products" -> Select the product using the filters and search field -> Open product page -> The "Configure" button to the right of the product image opens the Product Configurator.
DeviceCare SFE100	Configuration tool for devices via fieldbus protocols and Endress+Hauser service protocols. DeviceCare is the tool developed by Endress+Hauser for the configuration of Endress+Hauser devices. All smart devices in a plant can be configured via a point-to-point or point-to-bus connection. The user-friendly menus enable transparent and intuitive access to the field devices.  For details, see Operating Instructions BA00027S
FieldCare SFE500	FDT-based plant asset management tool from Endress+Hauser. It can configure all smart field units in your system and helps you manage them. By using the status information, it is also a simple but effective way of checking their status and condition.  For details, see Operating Instructions BA00027S and BA00065S
Accessories	Description
W@M	Life cycle management for your plant W@M offers assistance with a wide range of software applications over the entire process: from planning and procurement to the installation, commissioning and operation of the measuring devices. All the relevant information is available for every measuring device over the entire life cycle, such as the device status, device-specific documentation, spare parts etc. The application already contains the data of your Endress+Hauser device. Endress+Hauser also takes care of maintaining and updating the data records. W@M is available: Via the Internet: www.endress.com/lifecyclemanagement

System components	Accessories	Description
	RIA15 field indicator	The process indicator is looped into the current loop and displays the measuring signal or the HART process variables in digital form. The process indicator does not require an external power supply, as it gets its energy directly from the current loop.  For details, see "Technical Information" TI01043K
	RN22	1- or 2-channel active barrier for separation of 0/4 to 20 mA standard signal circuits, optionally available as a signal doubler, 24 V DC. HART-transparent.  For details, see "Technical Information" TI01515K
	RNS221	Supply unit for powering two 2-wire measuring devices solely in the non-Ex area. Bidirectional communication is possible via the HART communication jacks.  For details, see "Technical Information" TI00081R and Brief Operating Instructions KA00110R

Supplementary documentation

The following document types are available in the Downloads section of the Endress+Hauser website (www.endress.com/downloads):

-  For an overview of the scope of the associated Technical Documentation, refer to the following:
 - *W@M Device Viewer* (www.endress.com/deviceviewer): Enter the serial number from the nameplate
 - *Endress+Hauser Operations App*: Enter the serial number from the nameplate or scan the matrix code on the nameplate

Brief Operating Instructions (KA)	Guide that takes you quickly to the 1st measured value The Brief Operating Instructions contain all the essential information from incoming acceptance to initial commissioning.
Operating Instructions (BA)	Your reference guide These Operating Instructions contain all the information that is required in various phases of the life cycle of the device: from product identification, incoming acceptance and storage, to mounting, connection, operation and commissioning through to troubleshooting, maintenance and disposal.
Safety Instructions (XA)	Depending on the approval, the following Safety Instructions (XA) are supplied with the device. They are an integral part of the Operating Instructions.  The nameplate indicates the Safety Instructions (XA) that are relevant to the device.
Functional Safety Manual (FY/SD)	Depending on the SIL approval, the Functional Safety Manual (FY/SD) is an integral part of the Operating Instructions and applies in addition to the Operating Instructions, Technical Information and ATEX Safety Instructions.  The different requirements that apply for the protective function are described in the Functional Safety Manual (FY / SD).

Registered trademarks

HART®

Registered trademark of the FieldComm Group, Austin, Texas, USA



71562673

www.addresses.endress.com
