# SKR RESIDENTIAL HUMIDIFIER





Humidifying your home with a Neptronic SKR residential steam humidifier protects you from winter ailments. It reduces dry skin, sinus problems and scratchy throats by creating a healthier, more comfortable living environment. Proper humidity levels also protect valuables from permanent damage.

### **Advantages**

The SKR residential humidifier generates mineral free, odorless, sterile steam without the replacement cost associated with electrode cylinders.

- · Steam capacity from 2 to 5.4kg/hr
- Permanent cleanable stainless steel evaporation chamber
- Patented siphon drain requires no drain valve or external tap
- Environment friendly no plastic cylinders to replace
- · On/Off operation, modulation optional
- Drain water tempered to below 60°C
- · Self-cleaning heating elements

# **Typical Applications**

The SKR residential steam humidifier is the ultimate solution for applications to improve indoor air quality and to protect valuable items for residential and light commercial applications such as:

Houses







Server Rooms











# **Typical Installation**

The SKR humidifier is typically used with a dispersion tube installed through a duct. However, we offer fan distribution installations as well for applications where a duct system is not available.

### The SKR includes:

- 1 On/Off humidifier complete with:
  - · 1 remote alarm dry contact
  - 1 dry contact to start the HVAC fan on a call for humidity
- 1 S.A.M. stream absorption manifol for duct distribution
- 6' (1.8m) flexible steam hose for steam distribution



# System Overview

### **Intelligent Controller**

- Manages control sequences and performs self diagnostics
- On/Off or modulating control functions
- · LED status display

### **Evaporation Chamber**

Permanent, easily serviceable, stainless steel chamber. No need to replace expensive plastic bottles

### **Heating Element**

Self-cleaning, electric heater elements

**Internal Plumbing Assembly** 



### **High Voltage Quick Connect**

Safe, fast and easy connection and reconnection of line voltage

#### **Water Level Sensors**

Conductive water level sensors for normal operation level and drain level

#### **Patented Siphon Drain**

Eliminates the use of a physical device such as a drain valve or external P trap to drain water

**Water Fill Valve** 

# **Evaporation Chamber**

### **Evaporate Water, Not Money!**

The Neptronic SKR humidifier includes a permanent, reusable stainless steel chamber instead of a disposable plastic bottle that must be replaced at least once a year, resulting in thousands of dollars of savings. These savings will more than pay for the initial cost of the humidifier.



# Specifications

# **Output and Consumption**

Model	Capacity	Power	Voltage	Amperage	Width	Height	Depth	Height with SDU
VILLA SKR3E	3 kg/hr	2.3 kW	230 Vac/1 ph	10 A	267 mm	368 mm	229 mm	500 mm
CHATEAU SKR4E	3.75 kg/hr	2.8 kW	230 Vac/1 ph	12.2 A	267 mm	368 mm	229 mm	500 mm
BELVEDERE SKR5E	5 kg/hr	3.7 kW	230 Vac/1 ph	16.1 A	267 mm	368 mm	229 mm	500 mm

Note: Operation with maximum 125Pa duct static pressure at steam distribution manifold location

### **Duct Distribution Installation**


For a duct distribution installation, the SKR requires a S.A.M. Steam Distribution System to disperse steam.




### S.A.M.

Ideal for condos/apartments without a duct network, the remote SDU is designed for through-the-wall installation to provide humidification directly into the room.

- Short absorption distance (less than 155 cm)
- · Stainless steel tube with brass nozzles
- · Nozzles prevent condensate from escaping the duct
- Inclined steam dispersion tube to return condensate back to humidifier or steam trap



S.A.M.: For models SKR4E and SKR5E

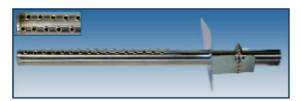

S.A.M.E2: For models SKR3E

# Fan Distribution Installations

The fan distribution installation option is ideal to supply steam directly with an SDU (steam distribution unit) into a room without a duct network or for a localized area.

#### **Common Features of SDU**

- · Quiet steam distribution
- · Powered and controlled by the humidifier
- · Air pressure switch included
- · Fan will keep running for four minutes after steam production has stopped to prevent any condensation

### Integrated SDU

This option is typically used in small stores, small warehouses and laboratories where the visibility of the unit is not an issue.



### Remote SDU

Ideal for condos/apartments without a duct network, the remote SDU is designed for through-the-wall installation to provide humidification directly into the room. This option is typically applied in residential applications and small offices to keep the elegance of the room.

### **Features**

- · Distribution unit is installed through a wall partition
- · SKR humidifier is installed in a closet or other closed location
- · Modern design of SDU front grill blends into any decor
- Low noise (less than 40dBa at 1m)
- Standard, 230Vac power supply



### **Specify your SKR online**

Humidifer System Design and Specification Web Application

Ready to specify your Humidifier? Neptronic has developed a web application that saves you time when sizing and specifying Neptronic commercial, industrial or residential humidifiers.





### **Features**

- · Automatic humidification load calculation
- Web based
- Report generator
- · Display absorption distance
- Steam dispersion selection
- Humidifier options
- · Project management



# Easy to Use

Once you have registered an online account, you can start creating projects and create your very own humidifier virtually with all the available features with ease.



### **Humidifier Product Line**



- Capacities from 5 120 kg/hr
- · Remove chamber easily, without tools
- · Outdoor unit available





- Residential
- Capacities from 3 5 kg/hr
- Permanent cleanable chamber
- · Reliable siphon drain



- Direct Steam
- Capacities from 2 750 kg/hr
- Jacketed or Multi-Steam<sup>™</sup> SD/HD
- Unique electronic steam controller
- Optional pressurized condensate return (PCR) system





- Capacities from 50 400 kg/hr
- Modular design

Gas Fired

Outdoor unit available





- High Pressure Atomizer
- Capacities up to 2100 kg/hr
- Up to 3 zones
- Installation in-duct or in-space
- Evaporative • Free cooling up to 12°C
  - · Custom design to fit your application
  - Hygienic operation with silver ion dosing system



- Steam Distribution
- Multi-Steam™ SD/HD distribution
- S.A.M. & S.A.M.E2 wands
- SDU (Space distribution unit)




- Insulated external panels

SKS4 TTT



- **Humidity Controls**
- Humidity controls/sensors
- Safety controls
- BACnet compatible

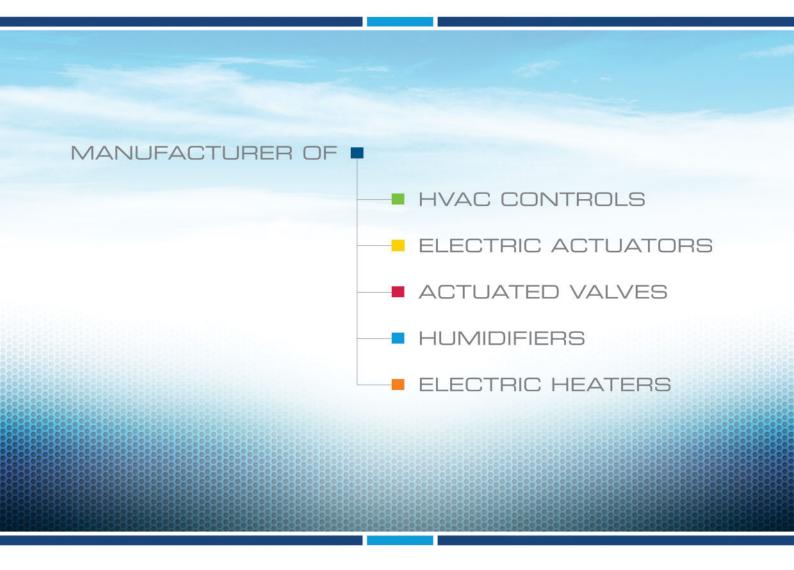

www.neptronic.com